


# 34000 E A.S.C. PLUS EVO


## 34000 E6F62




STANDARD

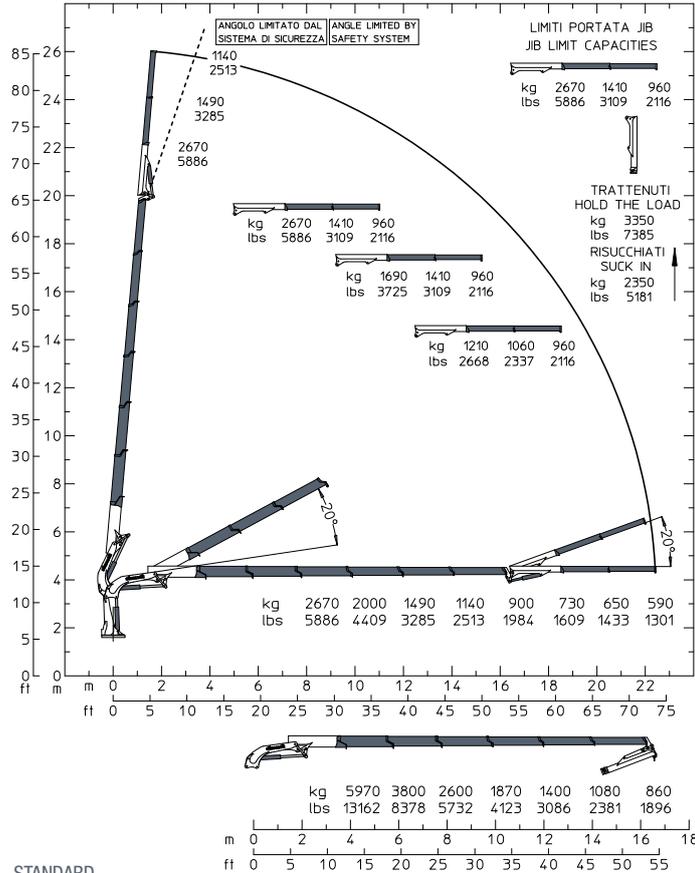

OPTIONAL

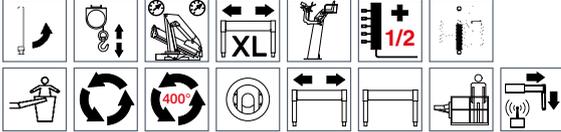


## 34000 E6F63

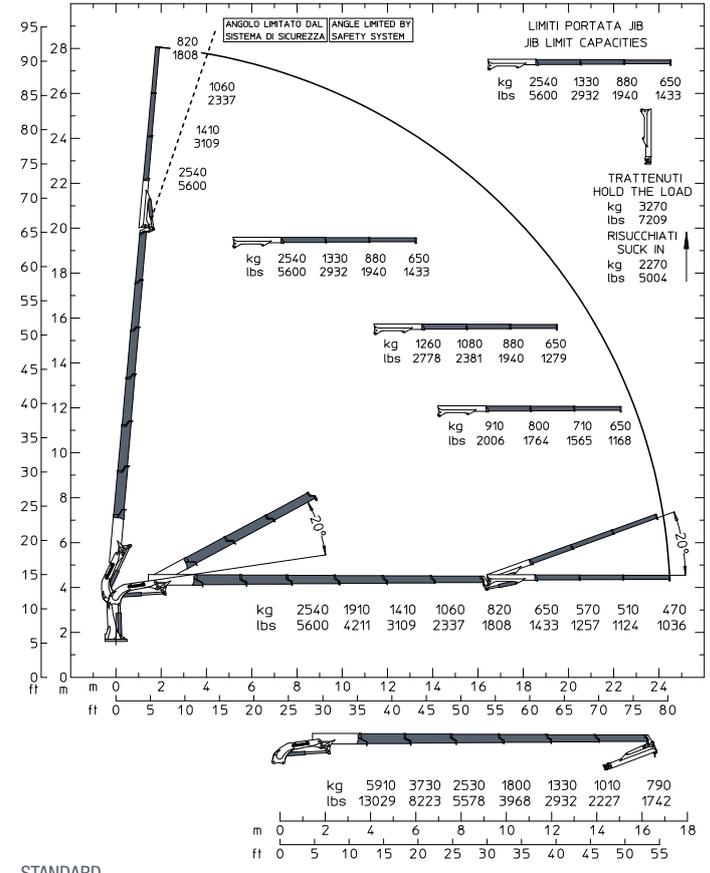

STANDARD




OPTIONAL

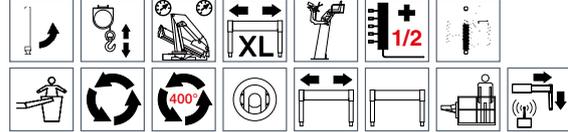

E6F62	E6F62		E6F63	E6F63
34500 da N*m	254460 Lb*ft	Momento statico massimo al perno torretta • Max. static moment at the turret pin Moment statique max. a l'axe de la tourelle • Max. statisches ubmoment am kranaulenbolzen	34500 da N*m	254460 Lb*ft
22.45 m	73' 8" ft	Sbraccio idraulico • Hydraulic boom length Longueur du bras hydraulique • Hydraulic reichweite	24.50 m	80' 5" ft
3700 da N*m	27290 Lb*ft	Coppia di rotazione • Slew torque • Moment de rotation • Drehmoment	3700 da N*m	27290 Lb*ft
sec. 33 - 360°	sec. 33 - 360°	Tempo di rotazione • Slewing speed • Temp de rotation • Schwenkgeschwindigkeit	sec. 33 - 360°	sec. 33 - 360°
1500+1750 mm	4' 11" + 5' 9" ft	Uscita stabilizzatori (*) • Outriggers extensions (*) Sortie des bequilles (*) • Breite der abstützung (*)	1500+1750 mm	4' 11" + 5' 9" ft
5630 mm	18' 6" ft	Larghezza stabilizzatori (**) • Outriggers width (**) Largeur des bequilles (**) • Breite der abstützung (**)	5630 mm	18' 6" ft
1220 mm	4' 0" ft	Lunghezza • Length • Longueur • Länge	1220 mm	4' 0" ft
2550 mm	8' 4" ft	Larghezza • Width • Largeur • Breite	2550 mm	8' 4" ft
2510 mm	8' 3" ft	Altezza • Height • Hauteur • Höhe	2510 mm	8' 3" ft
4780 Kg	10538 lbs	Peso (senza olio e montaggio) • Weight (without oil and fitting) Poids (sans huile et montage) • Gewicht (ohne öl und ohne)	4860 Kg	10714 lbs
60 l/min	16 us gal/min	Portata pompa (***) • Pump delivery (***) • Capacité de la pompe (***) • Pumpenheistung (***)	60 l/min	16 us gal/min
300 bar	4266 psi	Pressione • Pressure • Pression • Druck	300 bar	4266 psi
160 l	42 us gal	Capacità serbatoio olio • Oil tank capacity • Capacité de reservoir d'huile • Öl tank inhalt	160 l	42 us gal

Opzione • Option • Option • Option: (\*) 2100 + 2350 (6' 11" + 7' 9") - (\*\*) 6830 (22' 5") - (\*\*\*) Consigliata / Recommended / Recommandé / Empfohlen.

E5F62		E5F63		E5F64		E6F62		E6F63		E6F64	
m/ft	kg/lbs	m/ft	kg/lbs	m/ft	kg/lbs	m/ft	kg/lbs	m/ft	kg/lbs	m/ft	kg/lbs
8.57	2670	8.64	2540	8.71	2430	8.63	2670	8.70	2540	8.76	2430
28'1"	5886	28'4"	5600	28'7"	5357	28'4"	5886	28'7"	5600	28'9"	5357
10.52	2130	10.59	2040	10.66	1960	10.58	2000	10.65	1910	10.71	1840
34'6"	4696	34'9"	4497	35'0"	4321	34'9"	4409	35'0"	4211	35'2"	4057
12.54	1620	12.61	1540	12.68	1460	12.60	1490	12.67	1410	12.73	1330
41'1"	3571	41'4"	3395	41'7"	3219	41'4"	3285	41'7"	3109	41'9"	2932
14.58	1280	14.65	1200	14.72	1130	14.64	1140	14.71	1060	14.77	990
47'9"	2822	48'0"	2646	48'3"	2491	48'0"	2513	48'3"	2337	48'5"	2183
16.63	1040	16.70	960	16.77	890	16.69	900	16.76	820	16.82	750
54'6"	2293	54'9"	2116	55'0"	1962	54'9"	1984	55'0"	1808	55'2"	1653
18.46	920	18.53	840	18.60	770	18.78	730	18.85	650	18.92	580
60'6"	2028	60'9"	1852	61'0"	1698	61'7"	1609	61'10"	1433	62'1"	1279
20.30	830	20.37	760	20.44	680	20.61	650	20.68	570	20.75	500
66'7"	1830	66'10"	1676	67'1"	1499	67'7"	1433	67'10"	1257	68'1"	1102
		22.35	650	22.42	580	22.45	590	22.52	510	22.59	440
		73'4"	1433	73'7"	1279	73'8"	1301	73'11"	1124	74'1"	970
				24.40	460			24.50	470	24.57	400
				80'1"	1014			80'5"	1036	80'7"	882
										26.55	370
										87'1"	816



**E5F64**



**E6F64**

