



# Travel proposals

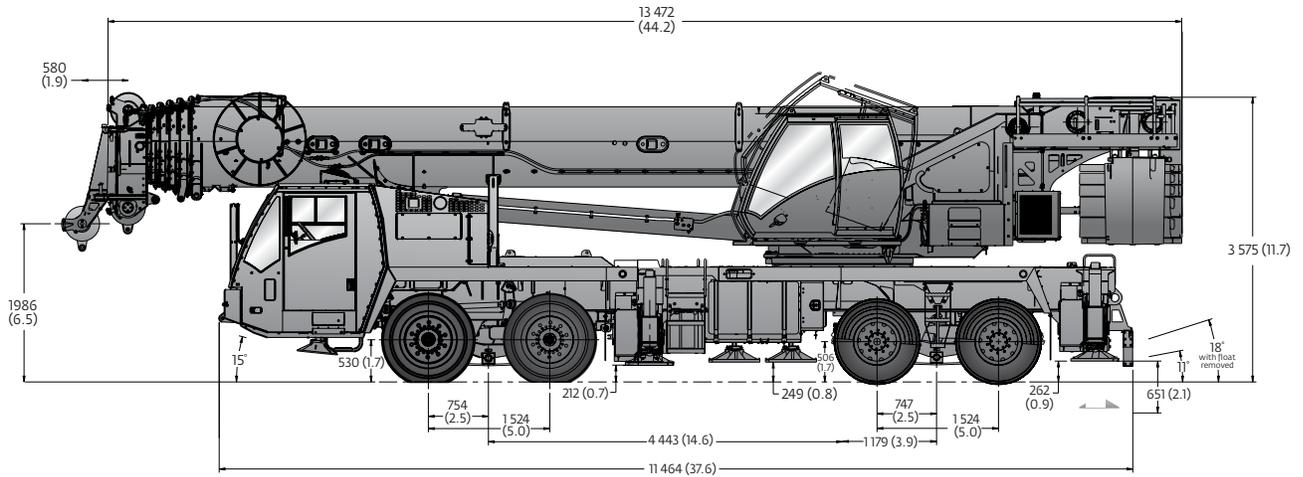

Dimensions shown in mm (ft)

Unit configuration						
	Front		Rear		G.V.W.	
<b>Basic machine:</b> Includes on-highway engine, main and auxiliary hoists with wire rope, air conditioning chassis and superstructure cabs, no counterweight and includes driver.	18 918 kg	41,706 lb	18 012 kg	39,710 lb	36 930 kg	81,416 lb
<b>Add:</b> 3,000 lb counterweight on carrier deck and 3,000 lb counterweight on superstructure. Total counterweight 6,000 lb.	19 485 kg	42,956 lb	20 175 kg	44,479 lb	39 660 kg	87,435 lb
<b>Add:</b> 3,000 lb counterweight on carrier deck and 5,000 lb counterweight on superstructure. Total counterweight 8,000 lb.	19 088 kg	42,081 lb	21 479 kg	47,354 lb	40 567 kg	89,435 lb
<b>Add:</b> 8000 lb counterweight on carrier deck and 6000 lb counterweight on superstructure. Total counterweight 14,000 lb.	19 662 kg	43,347 lb	23 644 kg	52,126 lb	43 306 kg	95,473 lb
Auxiliary boom nose	155 kg	356 lb	-75 kg	-166 lb	80 kg	190 lb
Manual 10,5 m to 17,6 m (34.5 ft - 57.6 ft) bi-fold swingaway (includes brackets)	1 713 kg	3,838 lb	5 kg	12 lb	1 718 kg	3,850 lb
Hydraulic 10,5 m to 17,6 m (34.5 ft - 57.6 ft) bi-fold swingaway (includes brackets and hose reel)	2 130 kg	4,703 lb	-100 kg	-220 lb	2 030 kg	4,483 lb
Hydraulic 10,5 m to 17,6 m (34.5 ft-57.6 ft) bifold swingaway with integrated 3,6 m (11,4 ft) heavy duty jib (includes stowage brackets and hose reel)	2 284 kg	4,464 lb	-75 kg	-166 lb	2 209 kg	4,298 lb
11,0 t (12.1 USt) top-swiveling overhaul weight stowed	434 kg	958 lb	-140 kg	-309 lb	294 kg	649 lb
45 t (50 USt), three-sheave quick-reeving hook block at bumper	764 kg	2,098 lb	-391 kg	-863 lb	373 kg	1,235 lb
<b>Maximum Allowable</b>	23 224 kg	51,200 lb	23 224 kg	51,200 lb	46 448 kg	102,400 lb

# Travel proposals

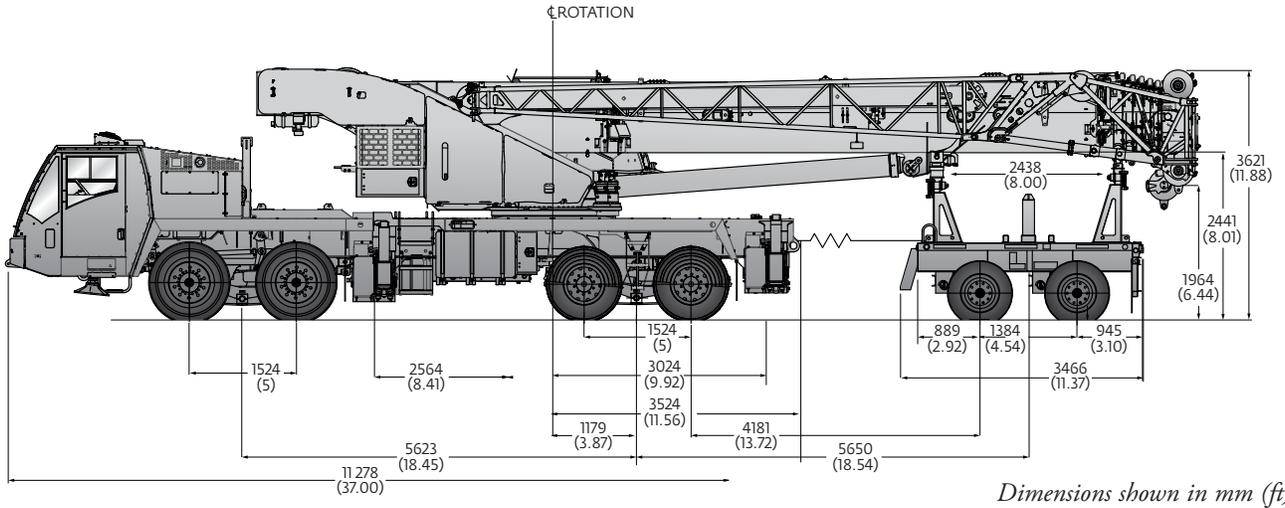

Unit configuration		Front		Rear		Boom Dolly		G.V.W.	
<b>Typical machine:</b> Includes X12 on-highway engine, main and auxiliary hoists with wire rope, auxiliary boom nose, manual bifold swingaway, stowed overhaul weight, 45 t (50 USt) hook block hanging at boom nose, no counterweight, includes driver and 6800 lb boom dolly.		15 636 kg	34,471 lb	14 993 kg	33,054 lb	12 192 kg	26,879 lb	42 821 kg	94,404 lb
<b>Add:</b> 6000 lb counterweight on front carrier deck or pinned to the superstructure, 5000 lb counterweight on rear chassis counterweight carrier, 15,000 lb on boom dolly. Total counterweight 26,000 lb.		17 296 kg	38,131 lb	18 379 kg	40,519 lb	19 005 kg	41,898 lb	54 680 kg	120,548 lb
<b>Add:</b> 6000 lb counterweight on the front carrier deck or pinned to superstructure, 5000 lb counterweight on rear chassis counterweight carrier, 25,000 lb on three-axle 9000 lb boom dolly. Total counterweight 36,000 lb.		17 296 kg	38,131 lb	18 379 kg	40,519 lb	23 541 kg	51,898 lb	59 216 kg	130,548 lb
<b>Substitute:</b> Hydraulic 10,5 m to 17,6 m (34.5 ft - 57.6 ft) bifold swingaway (includes brackets and hose reel) in lieu of the manual swingaway		20 476 kg	14 lb	4 kg	9 lb	277 kg	610 lb	20 757 kg	633 lb
<b>Substitute:</b> Hydraulic 10,5 m to 17,6 m (34.5 ft-57.6 ft) bifold swingaway with integrated 3 m (10 ft) heavy duty jib (includes stowage brackets and hose reel) in lieu of the manual swingaway		19 480 kg	24 lb	7 kg	16 lb	380 kg	838 lb	19 867 kg	878 lb