



## 95000 E2

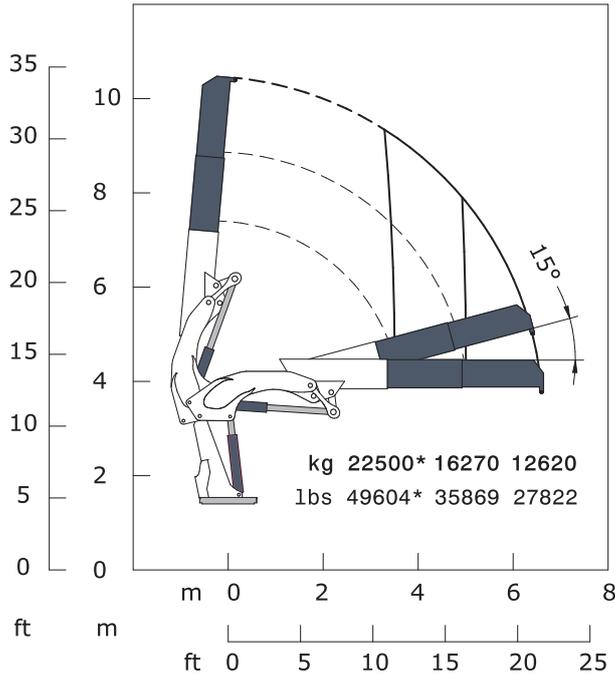


## 95000 E3

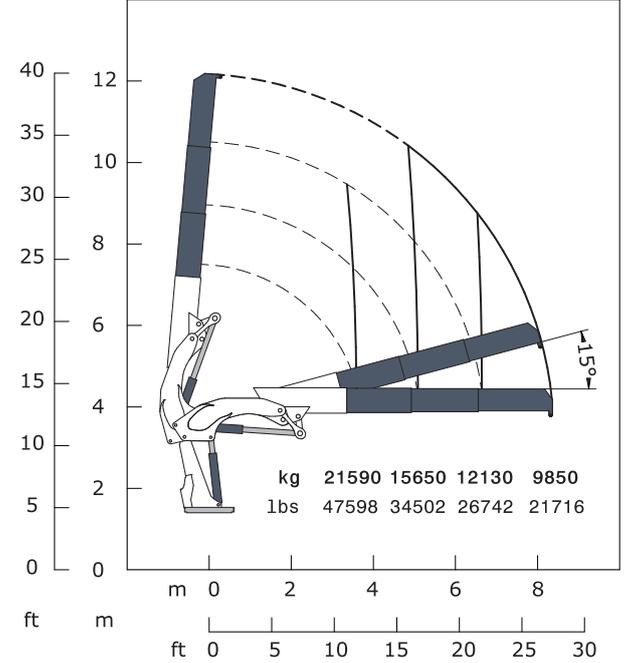

\*Su gancio 30 Ton (opzione), \*On 30 Ton hook (option), \*Sur croquet 30 Ton (option), \*Auf 30 Ton Haken (option).

### STANDARD




### OPTIONAL



### STANDARD



### OPTIONAL



E2	E2		E3	E3
95000 da N*m	687267 Lb*ft	Momento statico massimo al perno torretta • Max. static moment at the turret pin Moment statique max. a l'axe de la tourelle • Max. statisches ubmoment am kransaulenbolzen	95000 da N*m	687267 Lb*ft
6.55 m	21' 6" ft	Sbraccio idraulico • Hydraulic boom length Longueur du bras hydraulique • Hydraulic reichweite	8.27 m	27' 1" ft
8400 da N*m	60769 Lb*ft	Coppia di rotazione • Slew torque • Moment de rotation • Drehmoment	8400 da N*m	60769 Lb*ft
sec. 90 - 360°	sec. 90 - 360°	Tempo di rotazione • Slewing speed • Temp de rotation • Schwenkgeschwindigkeit	sec. 90 - 360°	sec. 90 - 360°
3625+2875 mm	11'11" + 9'5" ft	Uscita stabilizzatori • Outriggers extensions Sortie des bequilles • Breite der abstützung	3625+2875 mm	11'11" + 9'5" ft
8850 mm	29' 0" ft	Larghezza stabilizzatori • Outriggers width Largeur des bequilles • Breite der abstützung	8850 mm	29' 0" ft
1842 mm	6' 1" ft	Lunghezza • Length • Longeur • Länge	1842 mm	6' 1" ft
2540 mm	8' 4" ft	Larghezza • Width • Largeur • Breite	2540 mm	8' 4" ft
2650 mm	8' 8" ft	Altezza • Height • Hauteur • Höhe	2650 mm	8' 8" ft
7270 Kg	16028 lbs	Peso (senza olio e montaggio) • Weight (without oil and fitting) Poids (sans huile et montage) • Gewicht (ohne öl und ohne)	7590 Kg	16733 lbs
100 l/min	26 us gal/min	Portata pompa (*) • Pump delivery (*) • Capacité de la pompe (*) • Pumpenleistung (*)	100 l/min	26 us gal/min
330 bar	4692 psi	Pressione • Pressure • Pression • Druck	330 bar	4692 psi
260 l	69 us gal	Capacità serbatoio olio • Oil tank capacity • Capacité de reservoir d'huile • Öl tank inhalt	260 l	69 us gal

(\*) Consigliata, (\*) Recommended, (\*) Reconnué, (\*) Empfohlen