

- Serie 50000 E ASC Plus
- Serie 60000 E ASC Plus
- Serie 71000 E ASC Plus
- Serie 75000 E HP
- Serie 87000 E ASC Plus

- Serie 95000 E HP
- Serie 110000 E ASC Plus
- Serie 110000X E ASC Plus
- Serie 135000 E ASC Plus
- Serie 135000X E ASC Plus

- Serie 150000 E HP
- Serie 150000X E HP
- Serie 180000 E ASC Plus
- Serie 185000A E
- Serie 185000AX E


- Serie 240000A E
- Serie 240000AX E
- **Serie 575000AXO E**




CRANE SERIE 575000AXO E - SELECT THE MODEL:

- [E4](#) [E5](#) [E6](#) [E7](#) [E9](#) [E9J804](#)

CRANE E5 - CAPACITY DIAGRAM

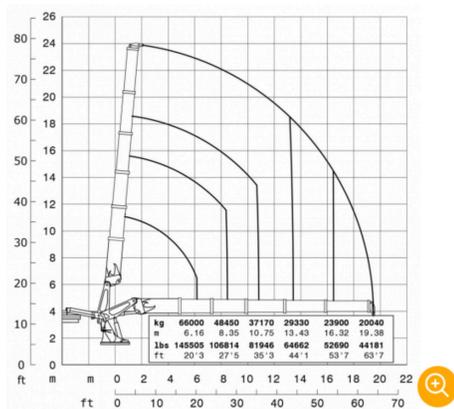


CRANE E5 - TABLE OF DIMENSIONS

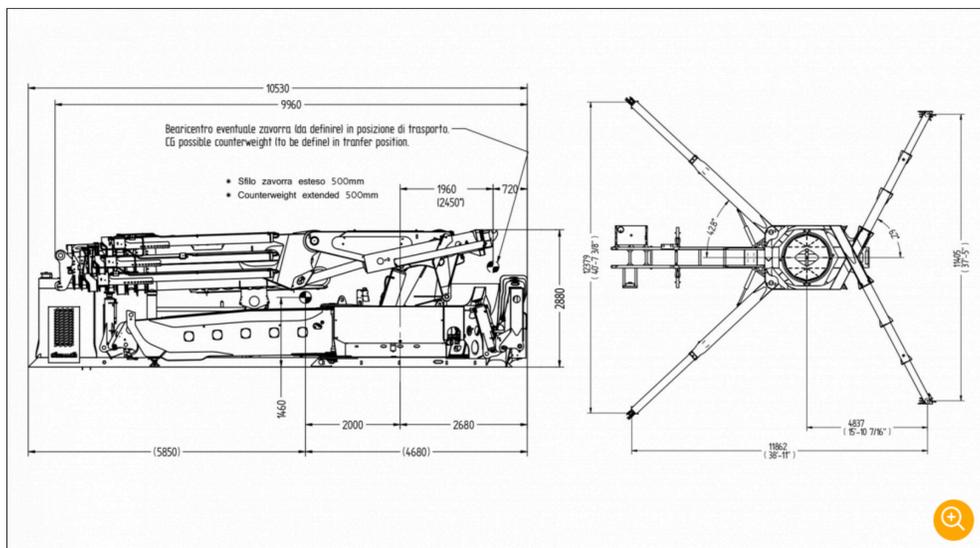

CRANE E5 - INFORMATION SHEET

TECHNICAL CHARACTERISTICS	METRIC SYSTEM	IMPERIAL SYSTEM
Static moment at tower pin	515000 daN/m	3725715 lbs/ft
Hydraulic reach	19380 mm	63'7"
Length	10530 mm	34'7"
Width	2548 mm	8'4"
Height	2880 mm	9'5"
Weight (without oil and assembly)	40980 kg	90345 lbs
Capacity	66000 kg	145505 lbs
Reach with manual extensions		
Slewing torque	33270 daN/m	240688 lbs/ft
Stabiliser protrusion	3150 + 3150 mm 5200 + 5200 mm	10'4" + 10'4" 17'1" + 17'1"
Stabiliser width	12340 mm	40'6"
Pump capacity	120 + 110 l/min	31 + 29 US gal/min
Pressure	330 bar	4692 psi
Tank capacity	770 + 455 l	203 + 120 US gal

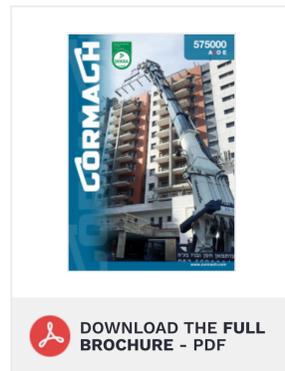

CRANE E5 - SUPPLIED AS STANDARD

- Continuous rotation
- Rotating base crane stabilisers
- Hydraulically extendible base crane stabilisers
- Remote control
- Moment limiter
- Dual moment limiter
- Heat exchanger
- Extended support plates
- Dual rotation
- Dual variable-flow pump
- Remote control stabiliser check.

CRANE E5 - OPTIONAL

- Winch
- Basket
- Self-levelling platform
- Marine crane treatment
- Ballast

STANDARD SERIE 575000AXO E PHOTO GALLERY



INFORMATIVA

Noi e terze parti selezionate raccogliamo informazioni personali come specificato nella [privacy policy](#) e utilizziamo cookie o tecnologie simili per finalità tecniche e, con il tuo consenso, anche per le finalità di **funzionalità**, **esperienza** e **misurazione** come specificato nella [cookie policy](#).

Puoi liberamente prestare, rifiutare o revocare il tuo consenso, in qualsiasi momento, accedendo al pannello delle preferenze. Il rifiuto del consenso può rendere non disponibili le relative funzioni. Usa il pulsante "Accetta tutto" per acconsentire.

- Funzionalità
- Esperienza
- Misurazione

[Accetta tutto](#)

[Scopri di più](#)

- [RANGE](#)
- [T-DUTY RANGE](#)
- [M-DUTY RANGE](#)
- [Y-DUTY RANGE](#)
- [SCOPIC CRANES](#)
- [Y CRANES](#)
- [NCE INDUSTRY](#)
- [NES](#)
- [INDUSTRY CRANES](#)
- [NE CRANES](#)

- [COMPANY PROFILE](#)
- [HOME](#)
- [ABOUT US](#)
- [OUR TECHNOLOGY](#)
- [VIDEOS](#)
- [DEALERS](#)
- [WORK WITH US](#)
- [CONTACT US](#)
- [RESERVED AREA](#)

CORMACH SRL

Via Madonnina, 27 CP 199 - 25018 Montichiari (BS) - Italy
 Telefono: +39.030.9656811 (6 linee r.a.) - Fax: +39.030.9656846
 Email: info@cormach.it
 P.IVA 00681780987 - C.F. 02075000170
 Reg. Imp. BS: 02075000170 - REA BS: 291719

PRIVACY | COOKIES | WHISTLEBLOWING
 Web design: [Studio Impronta](#)