



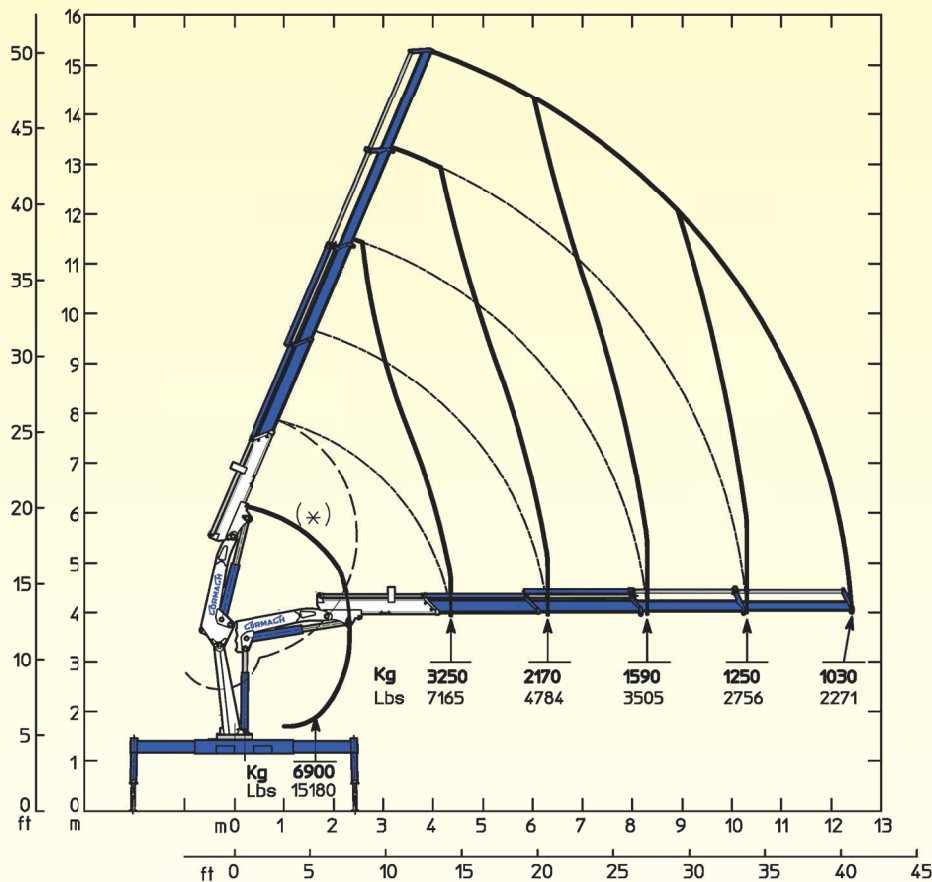


(*) Su gancio fisso (opzione), (*) On fixed hook (option), (*) Sur crochet fixe (option), (*) Auf festem Haken (option).

E4	E4	
18000 daN • m	130219 lbs • ft	Momento statico massimo al perno torretta • Max. static moment at the turret pin Moment statique max. a l'axe de la tourelle • Max. statisches ubmoment am kranstaulenbolzen
12,23 m	40'1"	Sbraccio idraulico • Hydraulic boom length Longueur du bras hydraulique • Hydraulic reichweite
14,29	46' 11"	Sbraccio con prolunghe manuali • Bomm length with manual extensions Longueur du bras avec rallonges manuelles
1750 daN • m	12660 lbs • ft	Coppia di rotazione • Slew torque • Moment de rotation • Drehmoment
24 sec - 360°	24 sec - 360°	Tempo di rotazione • Slewing speed • Temp de rotation • Schwenkgeschwindigkeit
1606+1350 mm	5'3"+4'5"	Uscita stabilizzatori • Outriggers extensions Sortie des bequilles • Breite der abstützung
5322 mm	17'6"	Larghezza stabilizzatori • Outriggers width Largeur des bequilles • Breite der abstützung
790 + 60 mm	2'7" + 0'2"	Lunghezza • Length • Longueur • Länge
2536 mm	8'4"	Larghezza • Width • Largeur • Breite
2310 mm	7'7"	Altezza • Height • Huteur • Höhe
2320 Kg	5115 Lbs	Peso (senza olio e montaggio) • Weight (without oil and fitting) Poids (sans huile et montage) • Gewicht (ohne öl und ohne)
35 lit /min	9 us gal/min	Portata pompa (*) • Pump delivery (*) • Capacité de la pompe (*) • Pumpenleistung (*)
290 bar	4123 psi	Pressione • Pressure • Pression • Druck
120 lit	31 us gal	Capacità serbatoio olio • Oil tank capacity • Capacité de reservoir d'huile • Öl tank inhalt

STANDARD



OPTIONAL

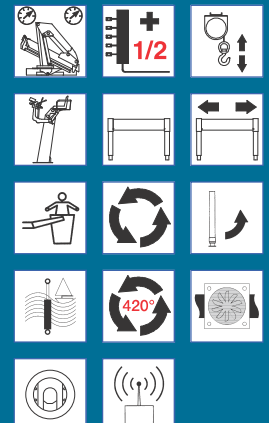

(*) Consigliata, (*) Recommended, (*) Recommandé, (*) Empfohlen.