


# 75000 E HP

## 75000 E7F184 HP



### STANDARD

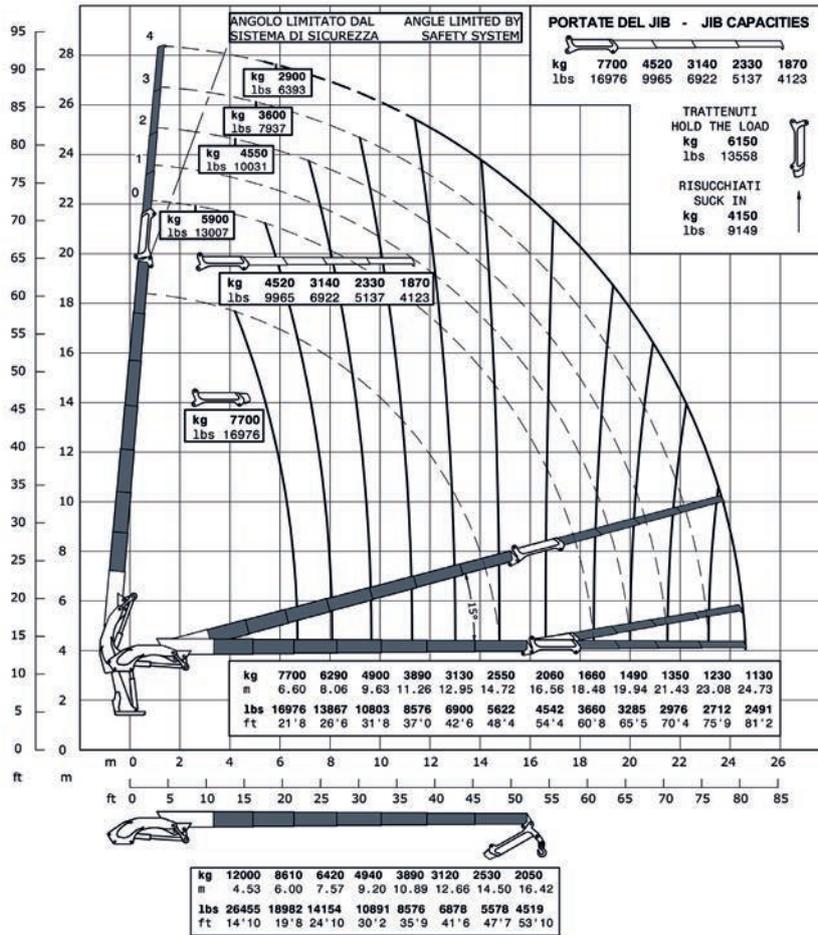

### OPTIONAL



E7F184	E7F184	
74750 da N*m	540771 Lb*ft	Momento statico massimo al perno torretta • Max. static moment at the turret pin Moment statique max. a l'axe de la tourelle • Max. statisches ubmoment am kranseulenbolzen
24.73 m	81' 2" ft	Sbraccio idraulico • Hydraulic boom length Longueur du bras hydraulique • Hydraulic reichweite
7100 da N*m	51364 Lb*ft	Coppia di rotazione • Slew torque • Moment de rotation • Drehmoment
sec. 90 - 360°	sec. 90 - 360°	Tempo di rotazione • Slewing speed • Temp de rotation • Schwenkgeschwindigkeit
3625+2875 mm	11' 11" + 9' 5" ft	Uscita stabilizzatori • Outriggers extensions Sortie des bequilles • Breite der abstützung
8850 mm	29' ft	Larghezza stabilizzatori • Outriggers width Largueur des bequilles • Breite der abstützung
1645 mm	5' 5" ft	Lunghezza • Length • Longeur • Länge
2540 mm	8' 4" ft	Larghezza • Width • Largeur • Breite
2916 mm	9' 7" ft	Altezza • Height • Huteur • Höhe
8431 Kg	18587 lbs	Peso (senza olio e montaggio) • Weight (without oil and fitting) Poids (sans huile et montage) • Gewicht (ohne öl und ohne)
100 l/min	26 us gal/min	Portata pompa (*) • Pump delivery (*) • Capacité de la pompe (*) • Pumpenheistung (*)
320 bar	4550 psi	Pressione • Pressure • Pression • Druck
235 l	62 us gal	Capacità serbatoio olio • Oil tank capacity • Capacité de reservoir d'huile • Öl tank inhalt

(\*) Consigliata, (\*) Recommended, (\*) Reconnandé, (\*) Empfohlen