




27500-E2

A.S.C.plus

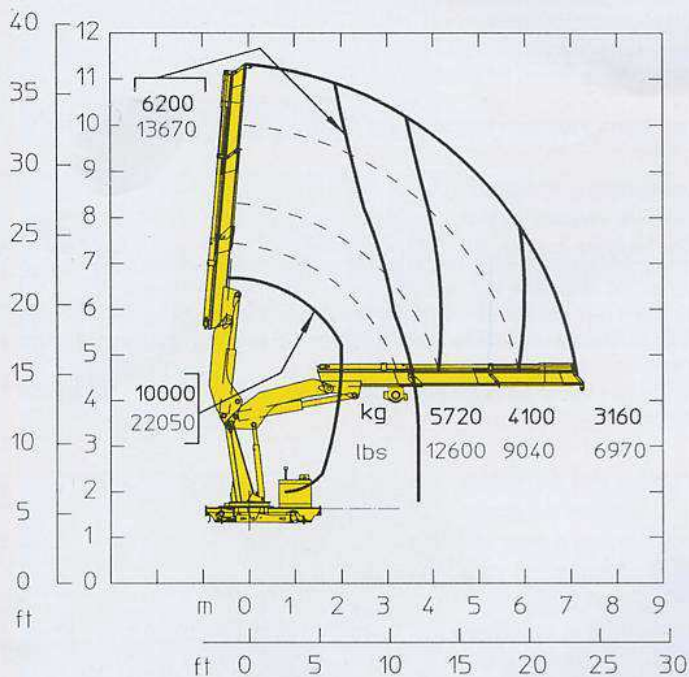

27500-E4


A.S.C.plus

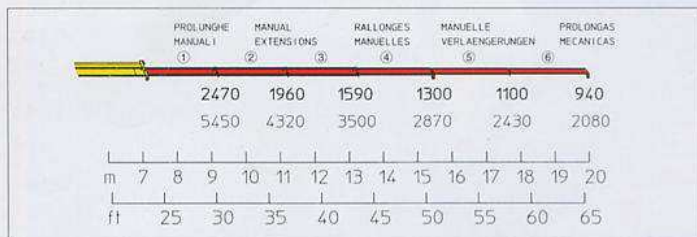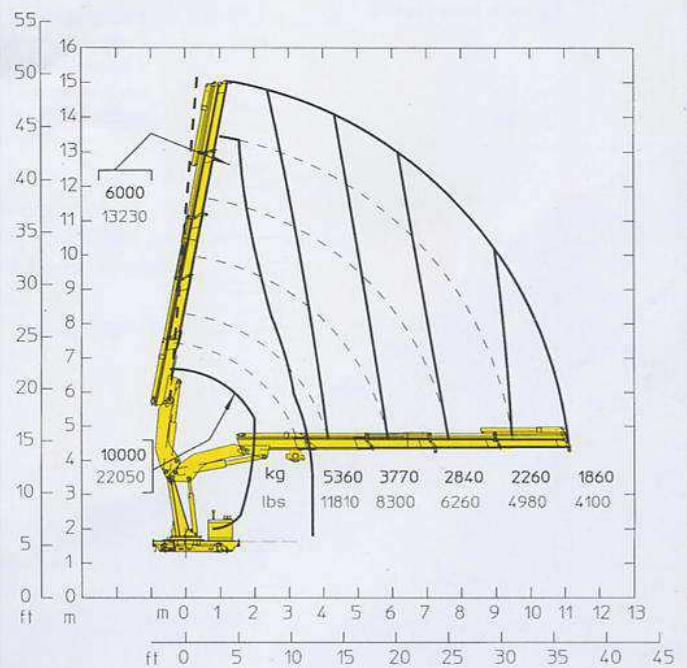

STANDARD




OPTIONAL

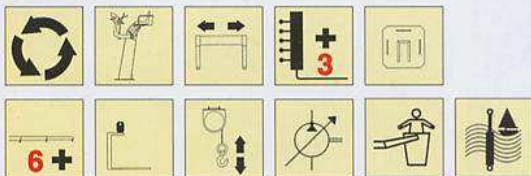

STANDARD



OPTIONAL

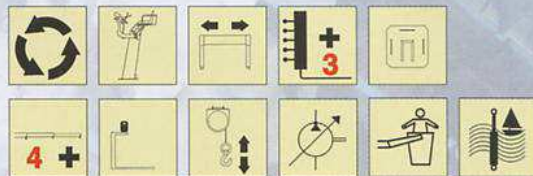

E2	E2		E4	E4
28000 daN • m	202560 lbs • ft	Momento statico massimo al perno torretta - Max. static moment at the turret pin - Moment statique max. à l'axe de la tourelle - Max. statisches Hubmoment am Kransaulenbolzen	28000 daN • m	202560 lbs • ft
7,4 m	24'3"	Sbraccio idraulico - Hyd. boom length - Longueur du bras Hyd. - Hyd. Reichweite	11,3 m	37'1"
20,0 m	65'7"	Sbraccio con prolunghe manuali - Boom length with manual extensions - Longueur du bras avec rallonges manuelles - Auslegerlänge - Longitud del brazo hidráulico con prolongas manuales	20,0 m	65'7"
2800 daN • m	20260 lbs • ft	Coppia di rotazione - Slew torque - Moment de rotation - Drehmoment	2800 daN • m	20260 lbs • ft
40 sec - 360°	40 sec - 360°	Tempo di rotazione - Slew speed - Temp de rotation - Schwenkgeschwindigkeit	40 sec - 360°	40 sec - 360°
1750+1750 mm	5'9"+5'9"	Uscita stabilizzatori - Outriggers extension - Sortie des bequilles - Breite der Abstützung	1750+1750 mm	5'9"+5'9"
5838 mm	19'2"	Larghezza stabilizzatori - Outriggers width - Largeur des bequilles - Gesamtbreite der Abstützung	5838 mm	19'2"
1007 mm	3'4"	Lunghezza - Outriggers - Largeur - Gesamtbreite - Ancho	1007 mm	3'4"
2500 mm	8'2"	Larghezza - Width - Largeur - Breite	2500 mm	8'2"
2230 mm	7'4"	Altezza - Height - Hauteur - Höhe	2230 mm	7'4"
2760 Kg	6090 Lbs	Peso (senza olio e montaggio) - Weight (without oil and fitting) - Poids (sans huile et montage) - Gewicht (ohne Öl und ohne)	3080 Kg	6790 Lbs
55 lit / min	14,5 us gal/min	Portata pompa - Pump delivery - Capacité de la pompe - Pumpenleistung	55 lit / min	14,5 us gal/min
300 bar	4270 psi	Pressione - Pressure - Pression - Druck	300 bar	4270 psi
155	41 us gal	Capacità serbatoio olio - Oil tank capacity - Capacité du réservoir d'huile - Öl tank inhalt - Aceite	155	41 us gal