



22500 E A.S.C.

22500 E1 A.S.C

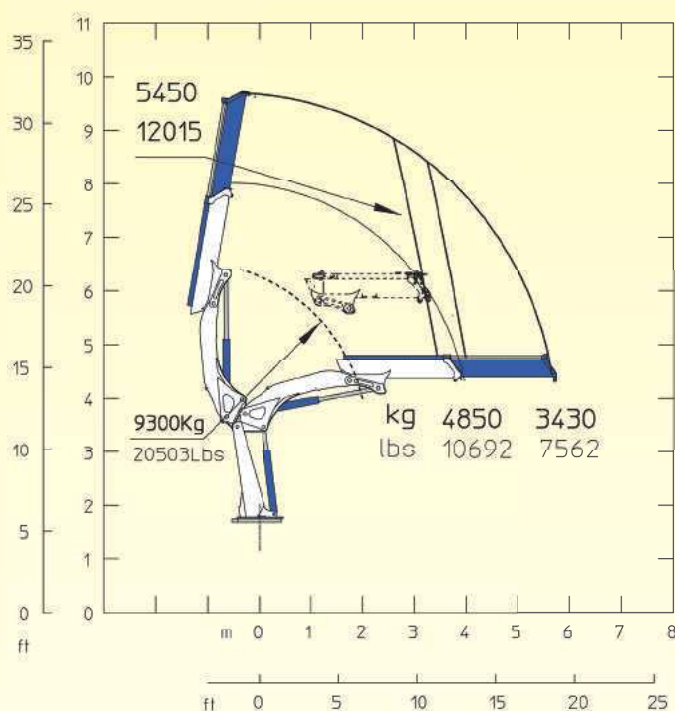


22500 E2 A.S.C.

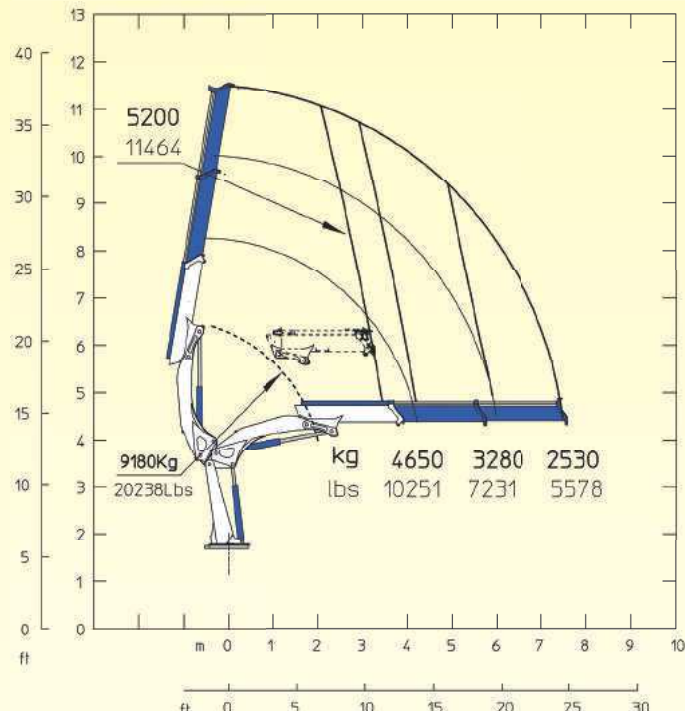

STANDARD



OPTIONAL

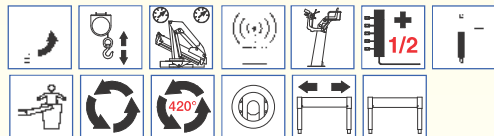

STANDARD



OPTIONAL



E1	E1		E2	E2
23000 daN*m	166391 Lb*ft	Momento statico massimo al perno torretta • Max. static moment at the turret pin Moment statique max. a l'axe de la tourelle • Max. statisches ubmoment am kran-saulenbolzen	23000 daN*m	166391 Lb*ft
5.72 m	18' 9"	Sbraccio idraulico • Hydraulic boom length Longueur du bras hydraulique • Hydraulic reichweite	7.56 m	24' 10"
11.56 m	37' 11"	Sbraccio con prolunghe manuali • Boom length with manual extensions Longueur du bras avec rallonges manuelles	13.70 m	44' 11"
2600 daN*m	18810 Lb*ft	Coppia di rotazione • Slew torque • Moment de rotation • Drehmoment	2600 daN*m	18810 Lb*ft
40 s - 360°	40 s - 360°	Tempo di rotazione • Slewing speed • Temp de rotation • Schwenkgeschwindigkeit	40 s - 360°	40 s - 360°
1850+1600 mm	6' 1" + 5' 3"	Uscita stabilizzatori • Outriggers extensions Sortie des bequilles • Breite der abstützung	1850+1600 mm	6' 1" + 5' 3"
5830 mm	19' 2"	Larghezza stabilizzatori • Outriggers width Largeur des bequilles • Breite der abstützung	5830 mm	19' 2"
949 mm	3' 1"	Lunghezza • Length • Longeur • Länge	949 mm	3' 1"
2515 mm	8' 3"	Larghezza • Width • Largeur • Breite	2515 mm	8' 3"
2281 mm	7' 6"	Altezza • Height • Huteur • Höhe	2281 mm	7' 6"
2460 kg	5423 lbs	Peso (senza olio e montaggio) • Weight (without oil and fitting) Poids (sans huile et montage) • Gewicht (ohne öl und ohne)	2600 kg	5732 lbs
45 l/min	12 us gal/min	Portata pompa (*) • Pump delivery (*) • Capacité de la pompe (*) • Pumpenheistung (*)	45 l/min	12 us gal/min
315 bar	4480 psi	Pressione • Pressure • Pression • Druck	315 bar	4480 psi
140 l	37 us gal	Capacità serbatoio olio • Oil tank capacity • Capacité de reservoir d'huile • Öl tank inhalt	140 l	37 us gal

(*) Consigliata, (*) Recommended, (*) Recommandé, (*) Empfohlen.