


22500 E A.S.C.


22500 E4F62 A.S.C. Plus




STANDARD

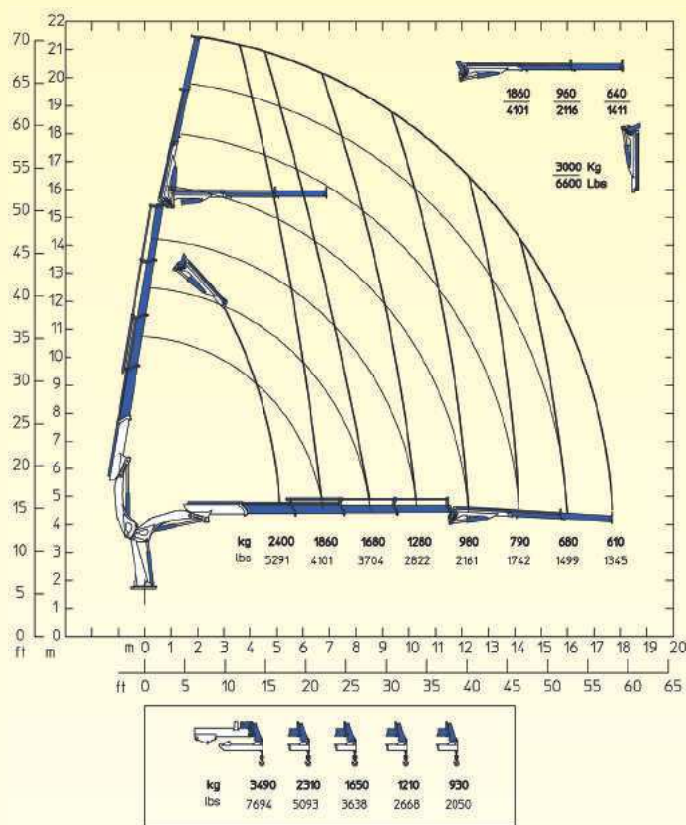

OPTIONAL

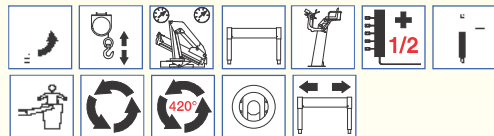


22500 E4F63 A.S.C. Plus

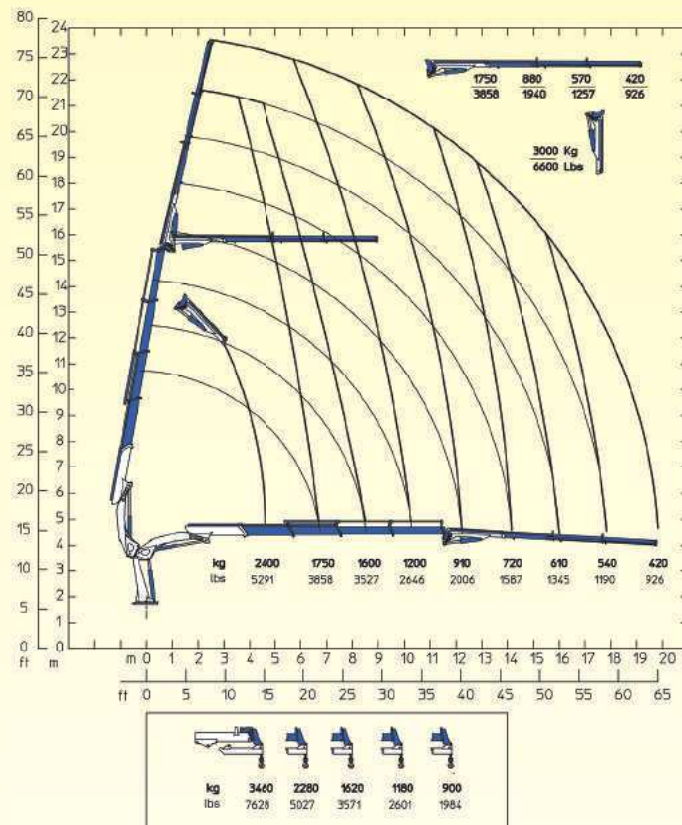

STANDARD



OPTIONAL

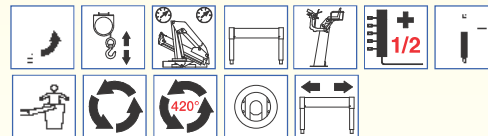

E4F62	E4F62		E4F63	E4F63
22000 daN*m	159160 Lb*ft	Momento statico massimo al perno torretta • Max. static moment at the turret pin Moment statique max. a l'axe de la tourelle • Max. statisches ubmoment am kranseulenbolzen	22000 daN*m	159160 Lb*ft
17.69 m	58'	Sbraccio idraulico • Hydraulic boom length Longueur du bras hydraulique • Hydraulic reichweite	19.73 m	64' 9"
/	/	Sbraccio con prolungha manuali • Boom length with manual extensions Longueur du bras avec rallonges manuelles	/	/
2600 daN*m	18810 Lb*ft	Coppia di rotazione • Slew torque • Moment de rotation • Drehmoment	2600 daN*m	18810 Lb*ft
40 s - 360°	40 s - 360°	Tempo di rotazione • Slewing speed • Temp de rotation • Schwenkgeschwindigkeit	40 s - 360°	40 s - 360°
1850+1600 mm	6' 1" + 5' 3"	Uscita stabilizzatori • Outriggers extensions Sortie des bequilles • Breite der abstützung	1850+1600 mm	6' 1" + 5' 3"
5830 mm	19' 2"	Larghezza stabilizzatori • Outriggers width Largeur des bequilles • Breite der abstützung	5830 mm	19' 2"
949 mm	3' 1"	Lunghezza • Length • Longeur • Länge	949 mm	3' 1"
2515 mm	8' 3"	Larghezza • Width • Largeur • Breite	2515 mm	8' 3"
2352 mm	7' 9"	Altezza • Height • Huteur • Höhe	2352 mm	7' 9"
3390 kg	7474 lbs	Peso (senza olio e montaggio) • Weight (without oil and fitting) Poids (sans huile et montage) • Gewicht (ohne öl und ohne)	3460 kg	7628 lbs
45 l/min	12 us gal/min	Portata pompa (*) • Pump delivery (*) • Capacité de la pompe (*) • Pumpenheistung (*)	45 l/min	12 us gal/min
305 bar	4337 psi	Pressione • Pressure • Pression • Druck	305 bar	4337 psi
140 l	37 us gal	Capacità serbatoio olio • Oil tank capacity • Capacité de reservoir d'huile • Öl tank inhalt	140 l	37 us gal

(*) Consigliata, (*) Recommended, (*) Recommandé, (*) Empfohlen.