




27500-E4F64

A.S.C.plus

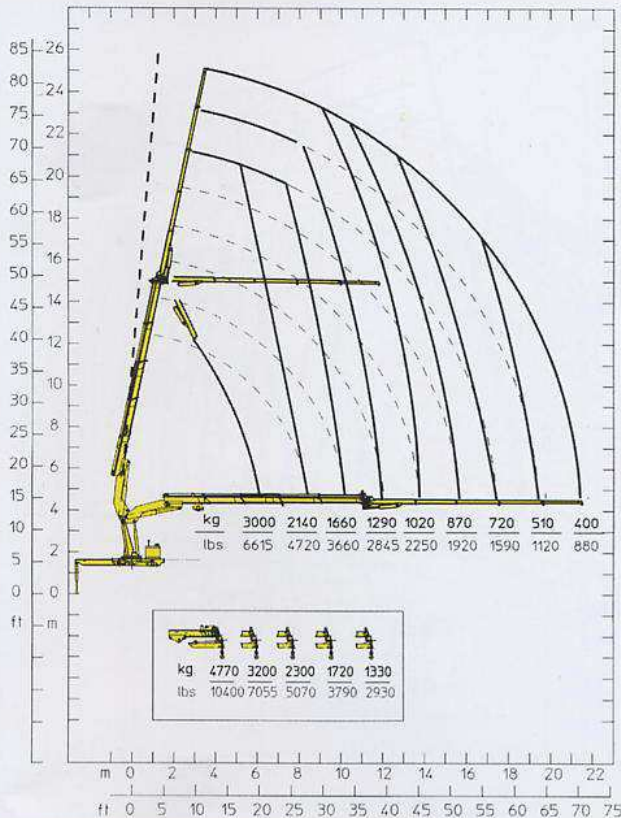

27500-E6F62


A.S.C.plus

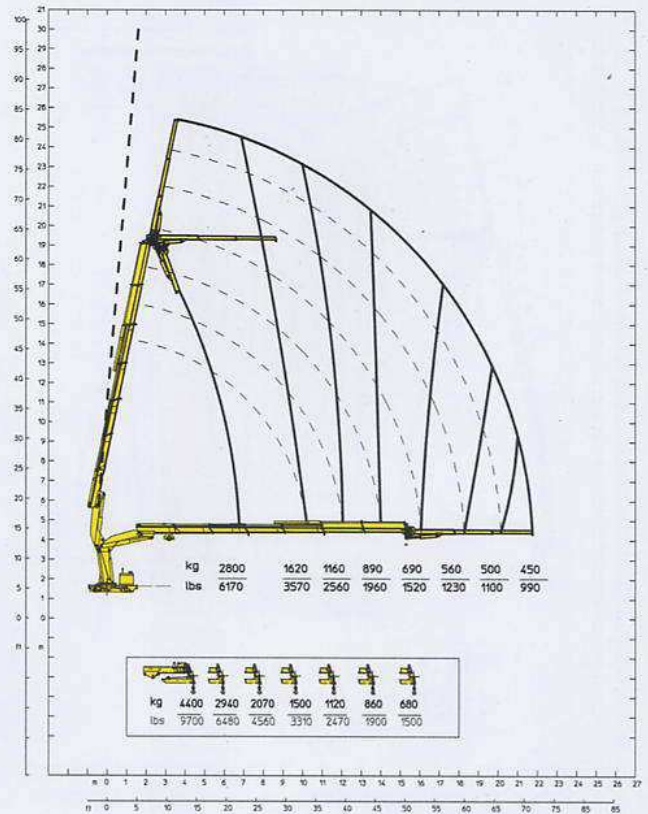

STANDARD




OPTIONAL

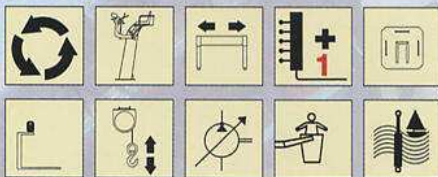

STANDARD



OPTIONAL

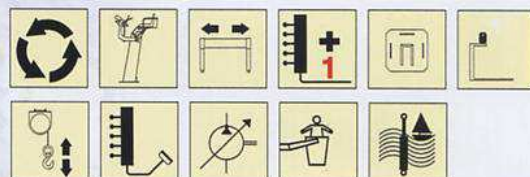

E4F64

28000 daN • m	202560 lbs • ft
21,40 m	70'3"
/	/
2800 daN • m	20260 lbs • ft
40 sec - 360°	40 sec - 360°
1750+1750 mm	5'9"+5'9"
5838 mm	19'2"
1007 mm	3'4"
2500 mm	8'2"
2230 mm	7'4"
3850 Kg	8490 Lbs
55 lit / min	14,5 us gal/min
300 bar	4270 psi
155	41 us gal

E4F64

202560 lbs • ft	70'3"
/	/
20260 lbs • ft	40 sec - 360°
5'9"+5'9"	1750+1750 mm
19'2"	5838 mm
3'4"	1007 mm
8'2"	2500 mm
7'4"	2230 mm
8490 Lbs	3850 Kg
14,5 us gal/min	55 lit / min
4270 psi	300 bar
41 us gal	155

Momento statico massimo al perno torretta - Max. static moment at the turret pin - Moment statique max. à l'axe de la tourelle - Max. statisches Hubmoment am Kransaulenbolzen

Sbraccio idraulico - Hyd. boom length - Longueur du bras Hyd. - Hyd. Reichweite

Sbraccio con prolunghe manuali - Boom length with manual extensions - Longueur du bras avec rallonges manuelles - Auslegerlänge - Longitud del brazo hidráulico con prolongas manuales

Coppia di rotazione - Slew torque - Moment de rotation - Drehmoment

Tempo di rotazione - Slewing speed - Temp de rotation - Schwenkgeschwindigkeit

Uscita stabilizzatori - Outriggers extension - Sortie des bequilles - Breite der Abstützung

Larghezza stabilizzatori - Outriggers width - Largeur des bequilles - Gesamtbreite der Abstützung

Lunghezza - Outriggers - Largeur - Gesamtbreite - Ancho

Larghezza - Width - Largeur - Breite

Altezza - Height - Hauteur - Höhe

Peso (senza olio e montaggio) - Weight (without oil and fitting) - Poids (sans huile et montage) - Gewicht (ohne Öl und ohne)

Portata pompa - Pump delivery - Capacité de la pompe - Pumpenleistung

Pressione - Pressure - Pression - Druck

Capacità serbatoio olio - Oil tank capacity - Capacité du réservoir d'huile - Öl tank inhalt - Aceite

E6F62

28000 daN • m	202560 lbs • ft
21,42 m	70'3"
/	/
2800 daN • m	20260 lbs • ft
40 sec - 360°	40 sec - 360°
1750+1750 mm	5'9"+5'9"
5838 mm	19'2"
1007 mm	3'4"
2500 mm	8'2"
2230 mm	7'4"
4030 Kg	8890 Lbs
55 lit / min	14,5 us gal/min
300 bar	4270 psi
155	41 us gal

E6F62

202560 lbs • ft	70'3"
/	/
20260 lbs • ft	40 sec - 360°
5'9"+5'9"	1750+1750 mm
19'2"	5838 mm
3'4"	1007 mm
8'2"	2500 mm
7'4"	2230 mm
8890 Lbs	4030 Kg
14,5 us gal/min	55 lit / min
4270 psi	300 bar
41 us gal	155