




22500 E4F64 A.S.C. Plus

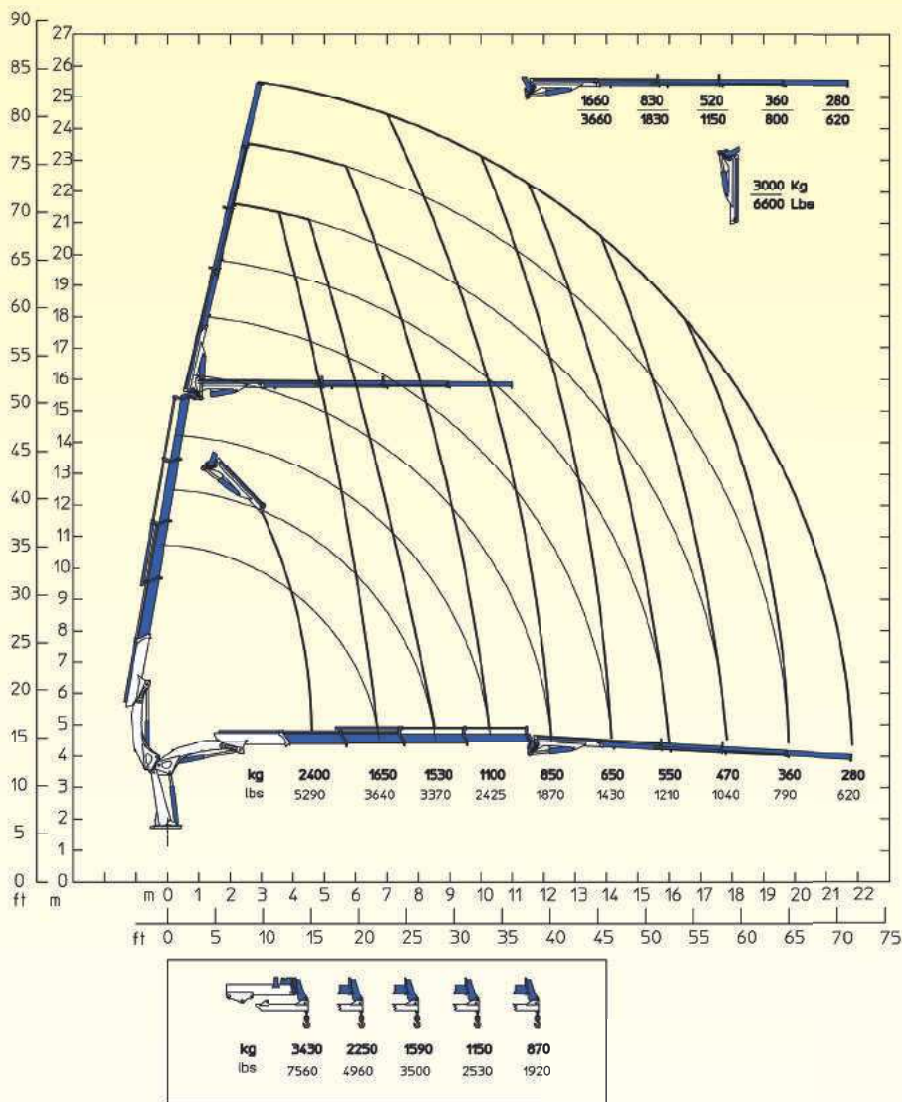

STANDARD



OPTIONAL



E4F64	E4F64	
22000 daN*m	159160 Lb*ft	Momento statico massimo al perno torretta • Max. static moment at the turret pin Moment statique max. a l'axe de la tourelle • Max. statisches ubmoment am kran Saulenbolzen
21.77 m	71' 5"	Sbraccio idraulico • Hydraulic boom length Longueur du bras hydraulique • Hydraulic reichweite
/	/	Sbraccio con prolunghe manuali • Boom length with manual extensions Longueur du bras avec rallonges manuelles
2600 daN*m	18814 Lb*ft	Coppia di rotazione • Slew torque • Moment de rotation • Drehmoment
40 s - 360°	40 s - 360°	Tempo di rotazione • Slewing speed • Temp de rotation • Schwenkgeschwindigkeit
1850+1600 mm	6' 1" + 5' 3"	Uscita stabilizzatori • Outriggers extensions Sortie des bequilles • Breite der abstützung
5830 mm	19' 2"	Larghezza stabilizzatori • Outriggers width Largeur des bequilles • Breite der abstützung
949 mm	3' 1"	Lunghezza • Length • Longeur • Länge
2515 mm	8' 3"	Larghezza • Width • Largeur • Breite
2352 mm	7' 9"	Altezza • Height • Huteur • Höhe
3520 kg	7760 lbs	Peso (senza olio e montaggio) • Weight (without oil and fitting) Poids (sans huile et montage) • Gewicht (ohne öl und ohne)
45 l/min	12 us gal/min	Portata pompa (*) • Pump delivery (*) • Capacité de la pompe (*) • Pumpenleistung (*)
305 bar	4337 psi	Pressione • Pressure • Pression • Druck
140 l	37 us gal	Capacità serbatoio olio • Oil tank capacity • Capacité de reservoir d'huile • Öl tank inhalt