



87000 E A.S.C. Plus

87000 E2

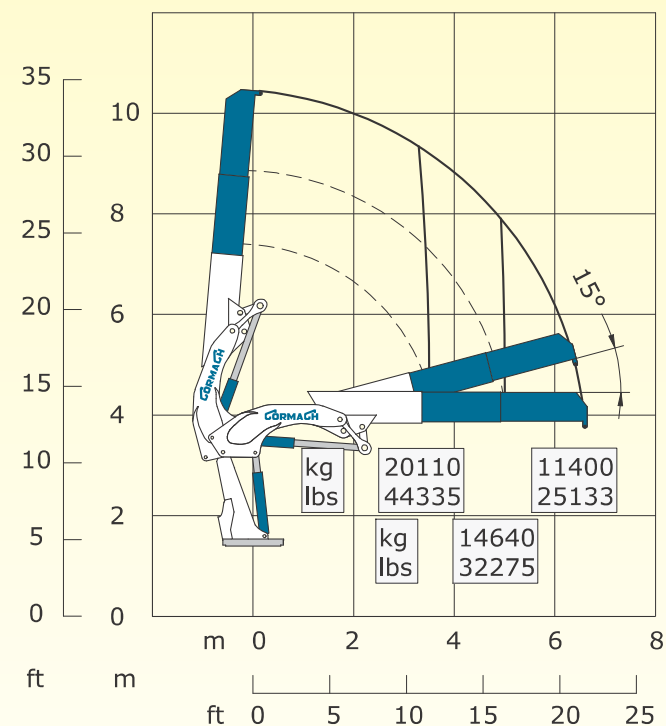


STANDARD




OPTIONAL



87000 E3

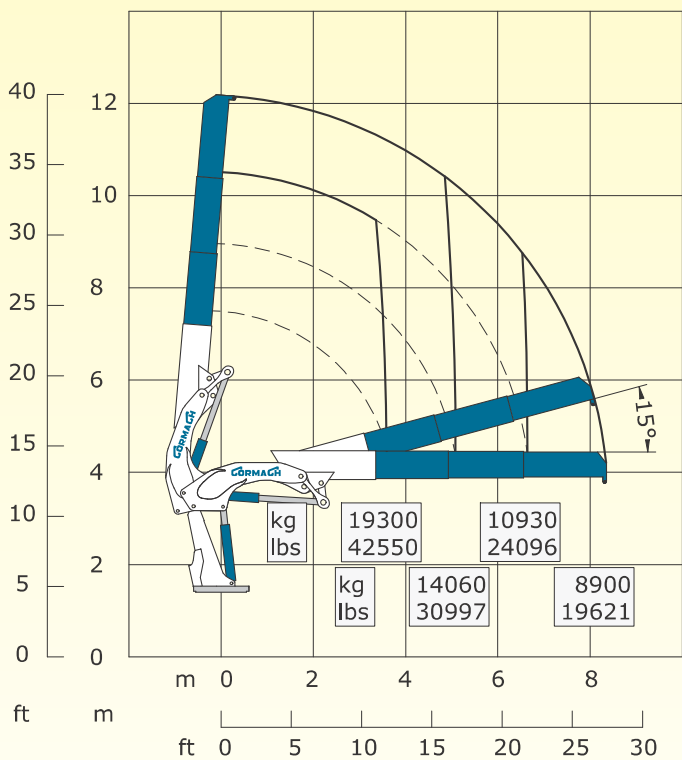

STANDARD



OPTIONAL



E2			E3	
87000 daN*m	629393 Lb*ft	Momento statico massimo al perno torretta – Max. static moment at the turret pin Moment statique max. a l'axe de la tourelle – Max. statisches ubmoment am kranseulenbolzen	87000 daN*m	629393 Lb*ft
6.55 m	21' 6"	Sbraccio idraulico – Hydraulic boom length Longueur du bras hydraulique – Hydraulic reichweite	8.27 m	27' 1"
		Sbraccio con prolunghe manuali – Boom length with manual extension Longueur du bras avec rallonges manuelles – Auslegerlänge		
8400 daN*m	60769 Lb*ft	Coppia di rotazione – Slew torque – Moment de rotation – Drehmoment	8400 daN*m	60769 Lb*ft
90 sec 360°	90 sec 360°	Tempo di rotazione – Slewing speed – Temp de rotation – Schwenkgeschwindigkeit	90 sec 360°	90 sec 360°
3625+2875 mm	11' 11" + 9' 5"	Uscita stabilizzatori – Outriggers extension – Sortie de bequilles – Breite der Abstützung	3625+2875 mm	11' 11" + 9' 5"
8850 mm	29' 0"	Larghezza stabilizzatori – Outriggers width – Largeur des bequilles – Gesamtbreite der Abstützung	8850 mm	29' 0"
1842 mm	6' 1"	Lunghezza – Length – Longueur - Gesamtbreite	1842 mm	6' 1"
2540 mm	8' 4"	Larghezza – Width – Largeur - Breite	2540 mm	8' 4"
2650 mm	8' 8"	Altezza – Height – Hauteur - Höhe	2650 mm	8' 8"
7180 kg	15830 lbs	Peso (senza olio e montaggio) – Weight (without oil and fitting) Poids (sans huile et montage – Gewicht (ohne Öl und ohne)	7500 kg	16535 lbs
100 l/min	26 us gal/min	Portata pompa – Pump delivery – Capacité de la pompe - Pumpenleistung	100 l/min	26 us gal/min
310 bar	4408 psi	Pressione – Pressure – Pression - Druck	310 bar	4408 psi
260 l	69 us gal	Capacità serbatoio olio – Oil tank capacity – Capacité du réservoir de l'huile – Öl tank inhalt	260 l	69 us gal