



12000-E3



STANDARD

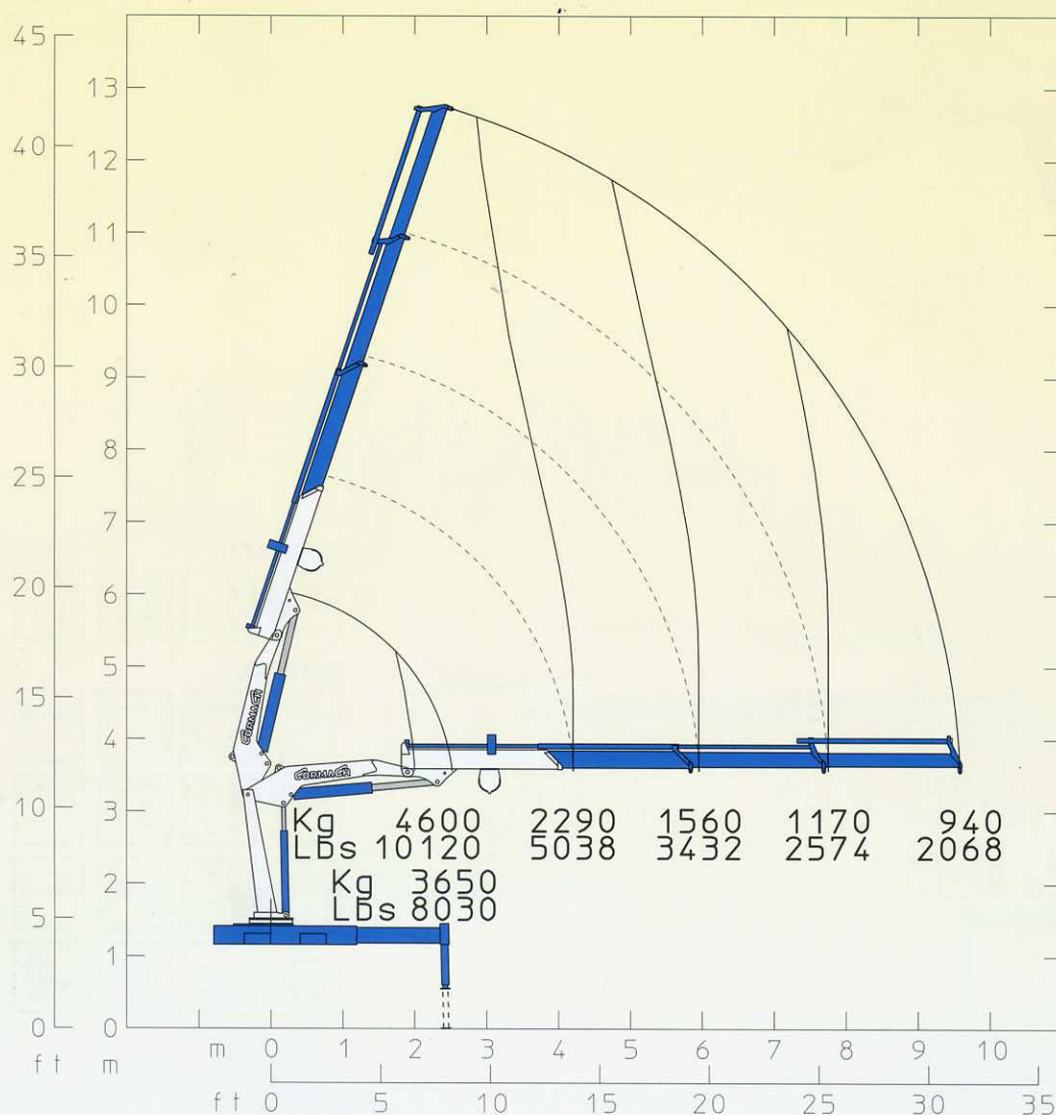

OPTIONAL



E3

12300 daN*m	88983 Lb*ft	Momento statico massimo al perno torretta - Max. static moment at the turret pin Moment statique max. a l'axe de la tourelle - Max. statisches ubmoment am kransaulenbolzen
9.58 m	21' 7"	Sbraccio idraulico - Hydraulic boom lenght - Longueur du bras hydraulique - Hydraulische reichweite
		Sbraccio con prolunghe manuali - Boom length with manual extension - Longueur du bras avec rallonges manuelles - Auslegerlänge
870 daN*m	6294 Lb*ft	Coppia di rotazione - Slew torque - Moment de rotation - Drehmoment
39 sec 360°	39 sec 360°	Tempo di rotazione - Slewing speed - Temp de rotation - Schwenkgeschwindigkeit
1400+1300mm	4' 7"+4' 3"	Uscita stabilizzatori - Outriggers extension - Sortie de bequilles - Breite der Abstützung
4850 mm	15' 11"	Larghezza stabilizzatori - Outriggers width - Largeur des bequilles - Gesamtbreite der Abstützung
793 mm	2' 7"	Lunghezza - Length - Longueur - Gesamtbreite
2405 mm	7' 11"	Larghezza - Width - Largeur - Breite
2160 mm	7' 1"	Altezza - Height - Hauteur - Höhe
1740 kg	3836 lbs	Peso (senza olio e montaggio) - Weight (without oil and fitting) - Poids (sans huile et montage - Gewicht (ohne Öl und ohne)
25 l/min	7 us gal/min	Portata pompa - Pump delivery - Capacité de la pompe - Pumpenleistung
275 bar	3911 psi	Pressione - Pressure - Pression - Druck
57 l	15 us gal	Capacità serbatoio olio - Oil tank capacity - Capacité du réservoir de l'huile - Öl tank inhalt