




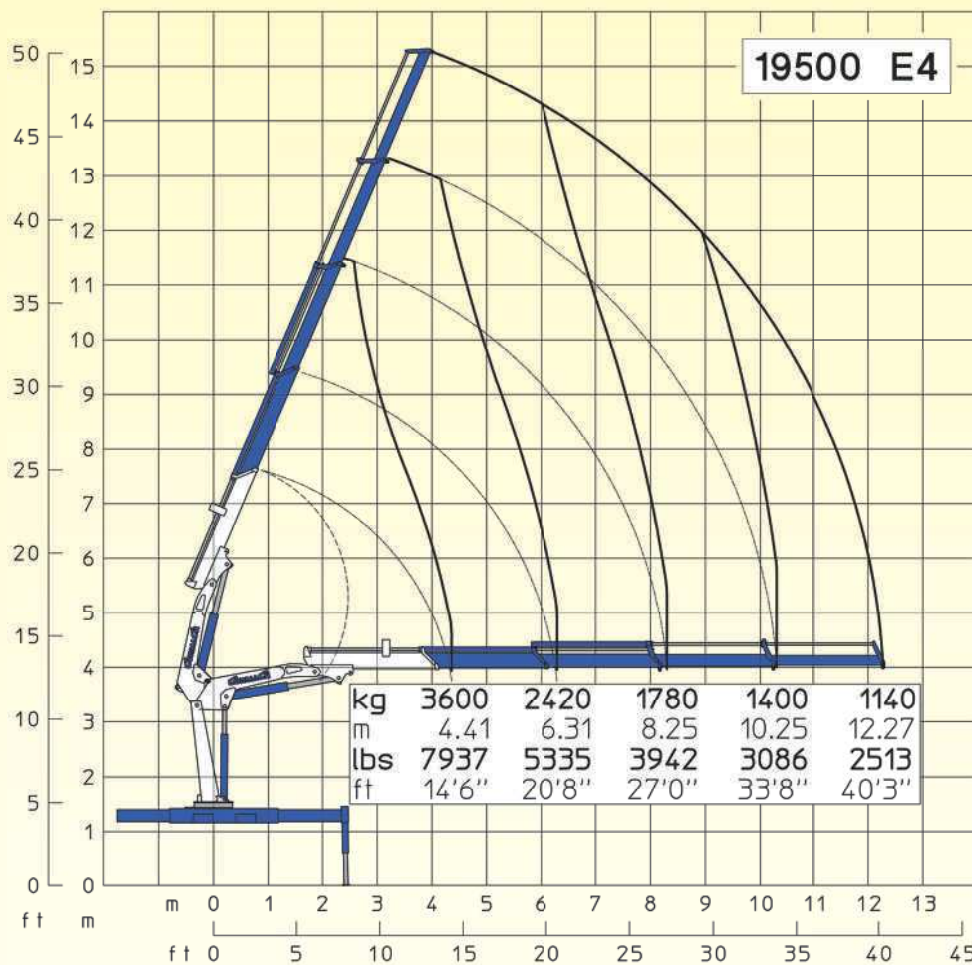

STANDARD



OPTIONAL

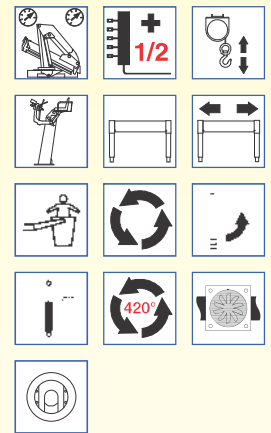

E4	E4	
19500 daN*m	141044 Lb*ft	Momento statico massimo al perno torretta • Max. static moment at the turret pin Moment statique max. a l'axe de la tourelle • Max. statisches ubmoment am kranstaulenbolzen
12.27 m	40' 3"	Sbraccio idraulico • Hydraulic boom length Longueur du bras hydraulique • Hydraulic reichweite
		Sbraccio con prolunghe manuali • Bomm length with manual extensions Longueur du bras avec rallonges manuelles
1750 daN*m	12658 Lb*ft	Coppia di rotazione • Slew torque • Moment de rotation • Drehmoment
32 s 360°	32 s 360°	Tempo di rotazione • Slewing speed • Temp de rotation • Schwenkgeschwindigkeit
1610+1350 mm	5' 3" + 4' 5"	Uscita stabilizzatori • Outriggers extensions Sorties des bequilles • Breite der abstützung
5325 mm	17' 6"	Larghezza stabilizzatori • Outriggers width Largeur des bequilles • Breite der abstützung
790+60 mm	2' 7" + 0' 2"	Lunghezza • Length • Longeur • Länge
2478 mm	8' 2"	Larghezza • Width • Largeur • Breite
2310 mm	7' 7"	Altezza • Height • Hauteur • Höhe
2320 kg	5115 lbs	Peso (senza olio e montaggio) • Weight (without oil and fitting) Poids (sans huile et montage) • Gewicht (ohne öl und ohne)
50 l/min	13 us gal/min	Portata pompa (*) • Pump delivery (*) • Capacité de la pompe (*) • Pumpenleistung (*)
290 bar	4206 psi	Pressione • Pressure • Pression • Druck
120 l	31 us gal	Capacità serbatoio olio • Oil tank capacity • Capacité de reservoir d'huile • Öl tank inhalt