


27500-E6F63


A.S.C.plus



STANDARD

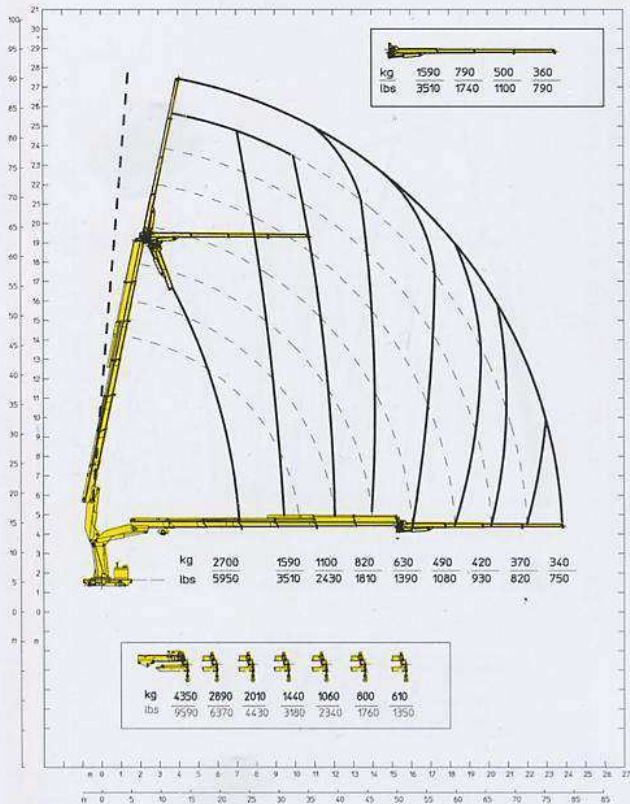

OPTIONAL

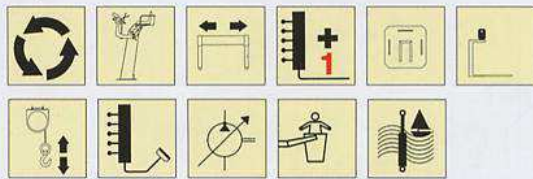

27500-E6F64

A.S.C.plus



STANDARD



OPTIONAL



E6F63

E6F63

28000 daN • m	202560 lbs • ft
23,49 m	77'1"
/	/
2800 daN • m	20260 lbs • ft
40 sec - 360°	40 sec - 360°
1750+1750 mm	5'9"+5'9"
5838 mm	19'2"
1007 mm	3'4"
2500 mm	8'2"
2230 mm	7'4"
4090 Kg	9020 Lbs
55 lit / min	14,5 us gal/min
300 bar	4270 psi
155	41 us gal

Momento statico massimo al perno torretta - Max. static moment at the turret pin - Moment statique max. à l'axe de la tourelle - Max. statisches Hubmoment am Kransaulenbolzen
Sbraccio idraulico - Hyd. boom length - Longueur du bras Hyd. - Hyd. Reichweite
Sbraccio con prolunge manuali - Boom length with manual extensions - Longueur du bras avec rallonges manuelles - Auslegerlänge - Longitud del brazo hidráulico con prolongas manuales
Coppia di rotazione - Slew torque - Moment de rotation - Drehmoment
Tempo di rotazione - Slew speed - Temp de rotation - Schwenkgeschwindigkeit
Uscita stabilizzatori - Outriggers extension - Sortie des bequilles - Breite der Abstützung
Larghezza stabilizzatori - Outriggers width - Largeur des bequilles - Gesamtbreite der Abstützung
Lunghezza - Outriggers - Largeur - Gesamtbreite - Ancho
Larghezza - Width - Largeur - Breite
Altezza - Height - Hauteur - Höhe
Peso (senza olio e montaggio) - Weight (without oil and fitting) - Poids (sans huile et montage) - Gewicht (ohne Öl und ohne)
Portata pompa - Pump delivery - Capacité de la pompe - Pumpenleistung
Pressione - Pressure - Pression - Druck
Capacità serbatoio olio - Oil tank capacity - Capacité du réservoir d'huile - Öl tank inhalt - Aceite

E6F64

E6F64

28000 daN • m	202560 lbs • ft
25,56 m	83'10"
/	/
2800 daN • m	20260 lbs • ft
40 sec - 360°	40 sec - 360°
1750+1750 mm	5'9"+5'9"
5838 mm	19'2"
1007 mm	3'4"
2500 mm	8'2"
2230 mm	7'4"
4150 Kg	9150 Lbs
55 lit / min	14,5 us gal/min
300 bar	4270 psi
155	41 us gal