



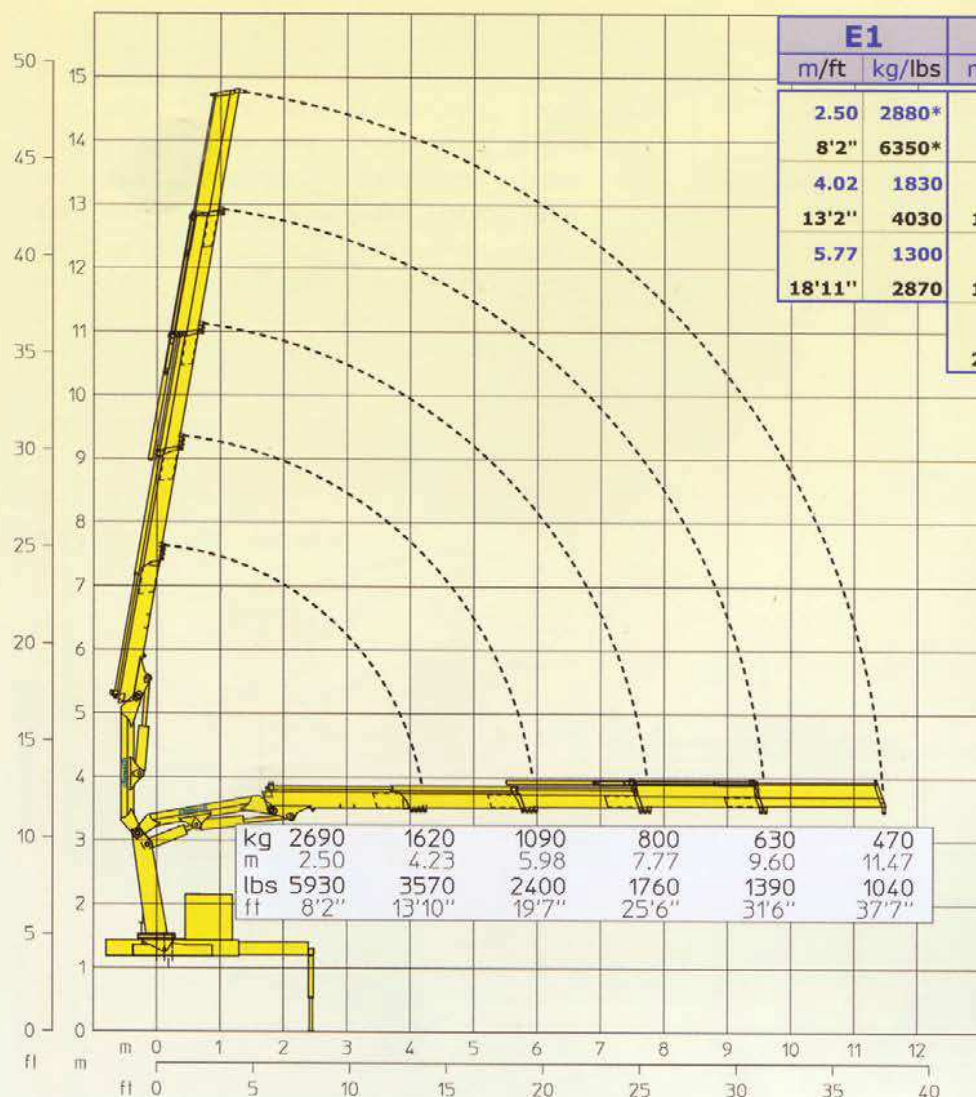


E1		E2		E3		E4	
m/ft	kg/lbs	m/ft	kg/lbs	m/ft	kg/lbs	m/ft	kg/lbs
2.50	2880*	2.50	2800*	2.50	2740*	2.50	2690*
8'2"	6350*	8'2"	6170*	8'2"	6040*	8'2"	5930*
4.02	1830	4.09	1760	4.16	1680	4.23	1620
13'2"	4030	13'5"	3880	13'8"	3700	13'10"	3570
5.77	1300	5.84	1220	5.91	1150	5.98	1090
18'11"	2870	19'2"	2690	19'5"	2530	19'7"	2400
		7.63	930	7.70	870	7.77	800
		25'0"	2050	25'3"	1920	25'6"	1760
				9.53	660	9.60	630
				31'3"	1450	31'6"	1390
						11.47	470
						37'7"	1040

(*) Su gancio fisso - On fixed hook

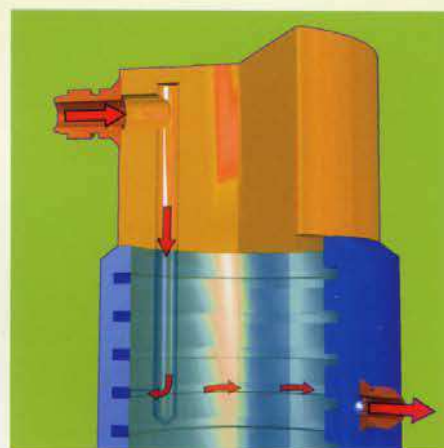

E4	E4	
8730 daN*m	63156 Lb*ft	Momento statico massimo al perno torretta • Max. static moment at the turret pin Moment statique max. a l'axe de la tourelle • Max. statisches ubmoment am kransaulenbolzen
11.47 m	37'7"	Sbraccio idraulico • Hydraulic boom length Longueur du bras hydraulique • Hydraulic reichweite
		Sbraccio con prolunghe manuali • Boom length with manual extensions Longueur du bras avec rallonges manuelles
820 daN*m	5932 Lb*ft	Coppia di rotazione • Slew torque • Moment de rotation • Drehmoment
29 sec 360°	29 sec 360°	Tempo di rotazione • Slewing speed • Temp de rotation • Schwenkgeschwindigkeit
1200+1100mm	3'11" + 3'7"	Uscita stabilizzatori (*) • Outriggers extensions (*) Sortie des bequilles (*) • Breite der abstützung (*)
4500 mm	14'9"	Larghezza stabilizzatori (**) • Outriggers width (**) Largeur des bequilles (**) • Breite der abstützung (**)
650+35 mm	2'2" + 0'1"	Lunghezza • Length • Longueur • Länge
2300 mm	7'7"	Larghezza • Width • Largeur • Breite
2000 mm	6'7"	Altezza • Height • Hauteur • Höhe
1350 kg	2976 lbs	Peso (senza olio e montaggio) • Weight (without oil and fitting) Poids (sans huile et montage) • Gewicht (ohne öl und ohne)
18 l/min	5 us gal/min	Portata pompa (***) • Pump delivery (***) • Capacité de la pompe (***) • Pumpenheistung (***)
275 bar	3911 psi	Pressione • Pressure • Pression • Druck
50 l	13 us gal	Capacità serbatoio olio • Oil tank capacity • Capacité de reservoir d'huile • Öl tank inhalt

STANDARD

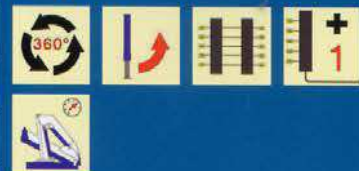

OPTIONAL

