




22500 E3 A.S.C.

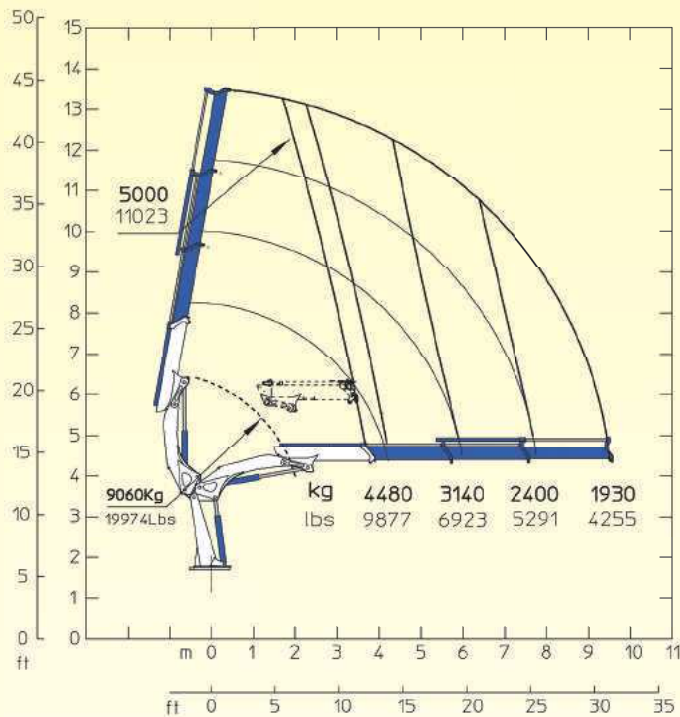


22500 E4 A.S.C.

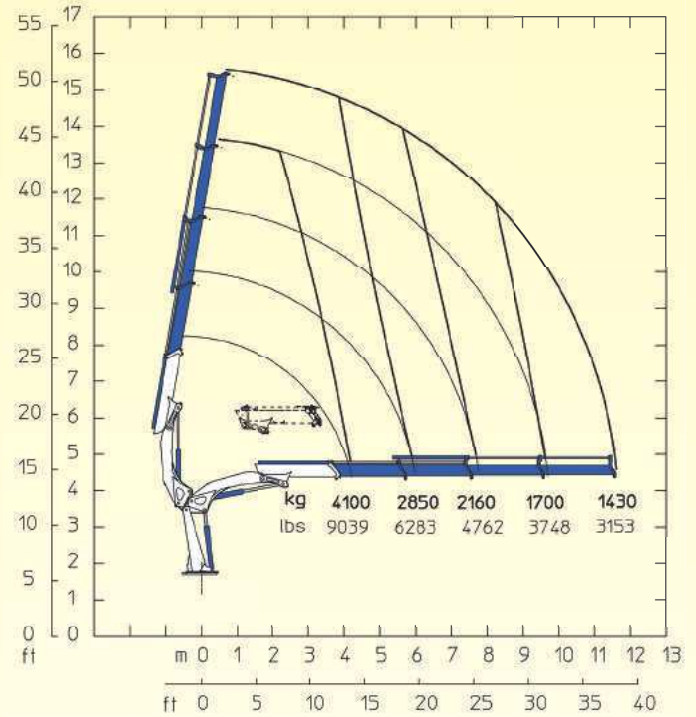

STANDARD



OPTIONAL

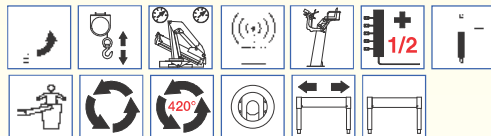

STANDARD



OPTIONAL



E3	E3		E4	E4
23000 daN*m	166391 Lb*ft	Momento statico massimo al perno torretta • Max. static moment at the turret pin Moment statique max. a l'axe de la tourelle • Max. statisches ubmoment am kransaulenbolzen	22000 daN*m	159160 Lb*ft
9.56 m	31' 4"	Sbraccio idraulico • Hydraulic boom length Longueur du bras hydraulique • Hydraulic reichweite	11.56 m	37' 11"
15.84 m	51' 12"	Sbraccio con prolunghe manuali • Boom length with manual extensions Longueur du bras avec rallonges manuelles	15.84 m	51' 12"
2600 daN*m	18810 Lb*ft	Coppia di rotazione • Slew torque • Moment de rotation • Drehmoment	2600 daN*m	18810 Lb*ft
40 s - 360°	40 s - 360°	Tempo di rotazione • Slewing speed • Temp de rotation • Schwenkgeschwindigkeit	40 s - 360°	40 s - 360°
1850+1600 mm	6' 1" + 5' 3"	Uscita stabilizzatori • Outriggers extensions Sortie des bequilles • Breite der abstützung	1850+1600 mm	6' 1" + 5' 3"
5830 mm	19' 2"	Larghezza stabilizzatori • Outriggers width Largeur des bequilles • Breite der abstützung	5830 mm	19' 2"
949 mm	3' 1"	Lunghezza • Length • Longueur • Länge	949 mm	3' 1"
2515 mm	8' 3"	Larghezza • Width • Largeur • Breite	2515 mm	8' 3"
2281 mm	7' 6"	Altezza • Height • Hauteur • Höhe	2281 mm	7' 6"
2740 kg	6041 lbs	Peso (senza olio e montaggio) • Weight (without oil and fitting) Poids (sans huile et montage) • Gewicht (ohne öl und ohne)	2860 kg	6305 lbs
45 l/min	12 us gal/min	Portata pompa (*) • Pump delivery (*) • Capacité de la pompe (*) • Pumpenheistung (*)	45 l/min	12 us gal/min
315 bar	4480 psi	Pressione • Pressure • Pression • Druck	305 bar	4337 psi
140 l	37 us gal	Capacità serbatoio olio • Oil tank capacity • Capacité de reservoir d'huile • Öl tank inhalt	140 l	37 us gal