



34000 E A.S.C. PLUS **EVO**

34000 E3

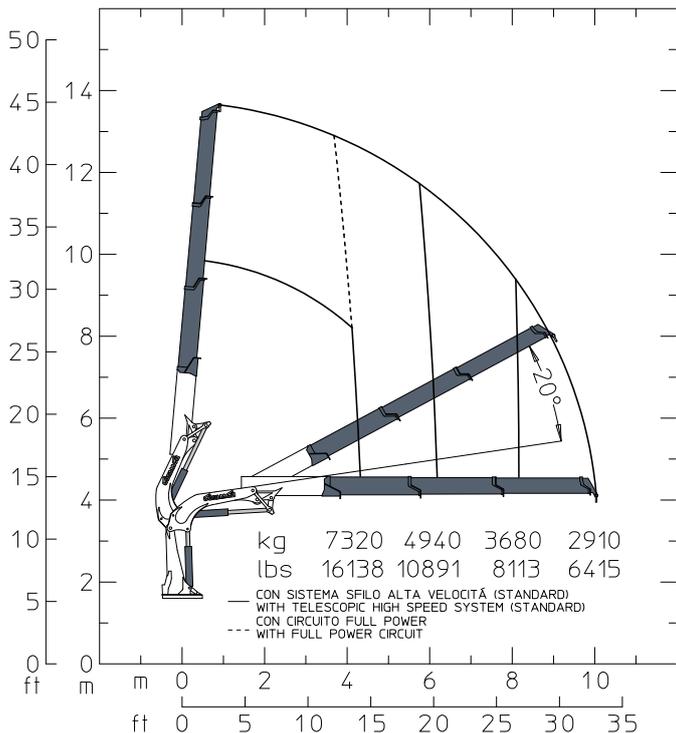


34000 E4

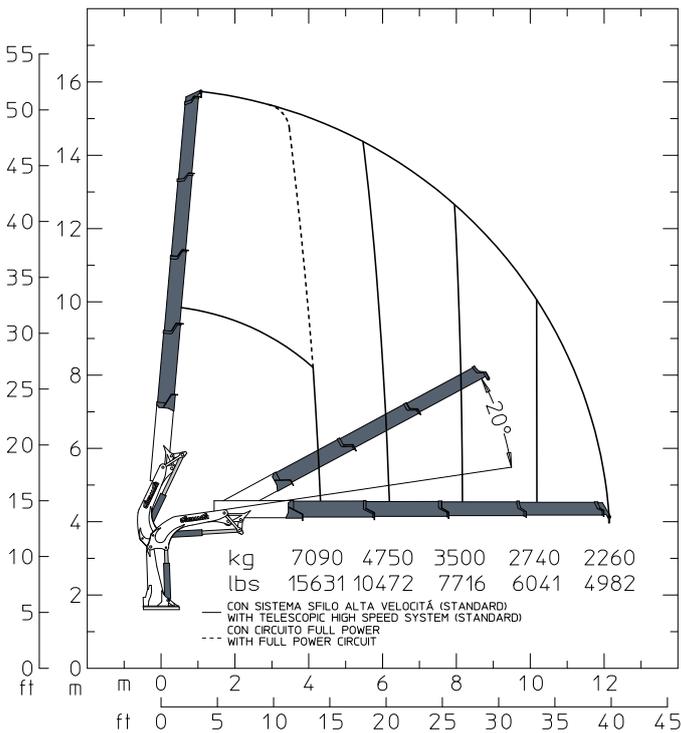

STANDARD




OPTIONAL

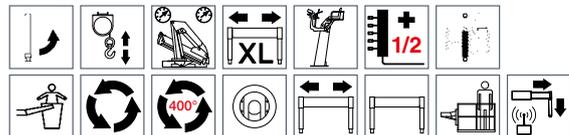

STANDARD



OPTIONAL

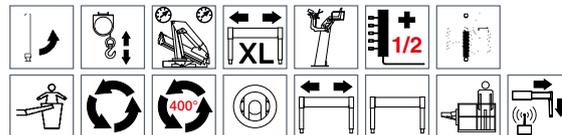

E3	E3		E4	E4
34500 da N*m	254460 Lb*ft	Momento statico massimo al perno torretta • Max. static moment at the turret pin Moment statique max. a l'axe de la tourelle • Max. statisches ubmoment am kransaulenbolzen	34500 da N*m	254460 Lb*ft
10.04 m	33' 0" ft	Sbraccio idraulico • Hydraulic boom length Longueur du bras hydraulique • Hydraulic reichweite	12.14 m	39' 10" ft
3700 da N*m	27290 Lb*ft	Coppia di rotazione • Slew torque • Moment de rotation • Drehmoment	3700 da N*m	27290 Lb*ft
sec. 33 - 360°	sec. 33 - 360°	Tempo di rotazione • Slewing speed • Temp de rotation • Schwenkgeschwindigkeit	sec. 33 - 360°	sec. 33 - 360°
1500+1750 mm	4' 11" + 5' 9" ft	Uscita stabilizzatori (*) • Outriggers extensions (*) Sortie des bequilles (*) • Breite der abstützung (*)	1500+1750 mm	4' 11" + 5' 9" ft
5630 mm	18' 6" ft	Larghezza stabilizzatori (**) • Outriggers width (**) Largeur des bequilles (**) • Breite der abstützung (**)	5630 mm	18' 6" ft
1220 mm	4' 0" ft	Lunghezza • Length • Longeur • Länge	1220 mm	4' 0" ft
2550 mm	8' 4" ft	Larghezza • Width • Largeur • Breite	2550 mm	8' 4" ft
2250 mm	7' 5" ft	Altezza • Height • Huteur • Höhe	2250 mm	7' 5" ft
3650 Kg	8047 lbs	Peso (senza olio e montaggio) • Weight (without oil and fitting) Poids (sans huile et montage) • Gewicht (ohne öl und ohne)	3830 Kg	8444 lbs
60 l/min	16 us gal/min	Portata pompa (***) • Pump delivery (***) • Capacité de la pompe (***) • Pumpenheistung (***)	60 l/min	16 us gal/min
300 bar	4266 psi	Pressione • Pressure • Pression • Druck	300 bar	4266 psi
160 l	42 us gal	Capacità serbatoio olio • Oil tank capacity • Capacité de reservoir d'huile • Öl tank inhalt	160 l	42 us gal

Opzione • Option • Option • Option: (*) 2100 + 2350 (6' 11" + 7' 9") - (**) 6830 (22' 5") - (***) Consigliata / Recommended / Recommandé / Empfohlen.

34000 E A.S.C. PLUS **EVO**

E3		E4		E5		E6		E7		E8	
m/ft	kg/lbs	m/ft	kg/lbs	m/ft	kg/lbs	m/ft	kg/lbs	m/ft	kg/lbs	m/ft	kg/lbs
4.18	7320	4.24	7090	4.30	6880	4.36	6670	4.42	6470	4.32	6550
13'9"	16138	13'11"	15631	14'2"	15168	14'4"	14705	14'6"	14264	14'2"	14440
6.07	4940	6.13	4750	6.19	4570	6.25	4400	6.31	4230	6.21	4210
19'11"	10891	20'1"	10472	20'4"	10075	20'6"	9700	20'8"	9326	20'4"	9281
8.02	3680	8.08	3500	8.14	3330	8.20	3160	8.26	3000	8.16	2960
26'4"	8113	26'6"	7716	26'9"	7341	26'11"	6967	27'1"	6614	26'9"	6526
10.04	2910	10.10	2740	10.16	2580	10.22	2410	10.28	2260	10.18	2200
33'0"	6415	33'2"	6041	33'4"	5688	33'6"	5313	33'9"	4982	33'5"	4850
		12.14	2260	12.20	2100	12.26	1930	12.32	1780	12.22	1710
		39'10"	4982	40'1"	4630	40'3"	4255	40'5"	3924	40'1"	3770
				14.25	1780	14.31	1620	14.37	1470	14.27	1380
				46'9"	3924	46'11"	3571	47'2"	3241	46'10"	3042
						16.40	1400	16.46	1240	16.37	1160
						53'10"	3086	54'0"	2734	53'8"	2557
								18.68	1080	18.58	990
								61'3"	2381	60'11"	2183
										20.81	880
										68'3"	1940

