




135000 E8 - 135000X E8

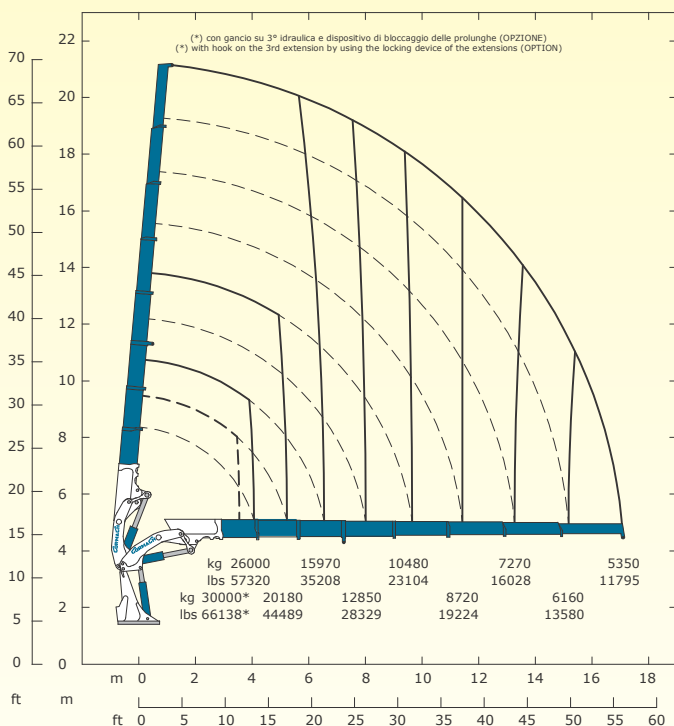

135000 E9 - 135000X E9

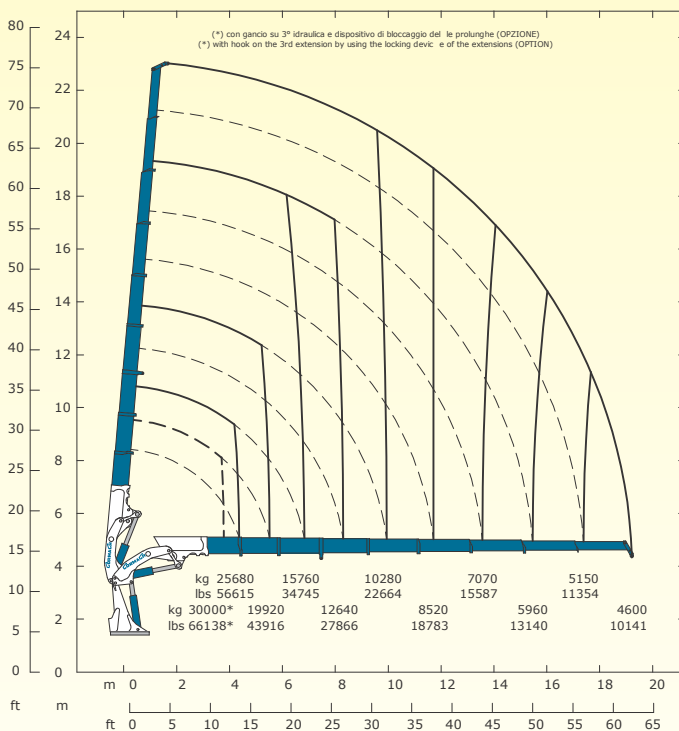


STANDARD




OPTIONAL



STANDARD



OPTIONAL



E8			E9	
136300 daN*m	986048 Lb*ft	Momento statico massimo al perno torretta – Max. static moment at the turret pin Moment statique max. a l'axe de la tourelle – Max. statisches ubmoment am kransaulenbolzen	136300 daN*m	986048 Lb*ft
17.14 m	56' 3"	Sbraccio idraulico – Hydraulic boom lenght Longueur du bras hydraulique – Hydraulic reichweite	19.00 m	62' 4"
		Sbraccio con prolunghe manuali – Boom length with manual extension Longueur du bras avec rallonges manuelles - Auslegerlänge		
13000 daN*m	94047 Lb*ft	Coppia di rotazione – Slew torque – Moment de rotation – Drehmoment	13000 daN*m	94047 Lb*ft
90 sec 360°	90 sec 360°	Tempo di rotazione – Slewing speed – Temp de rotation – Schwenkgeschwindigkeit	90 sec 360°	90 sec 360°
4140+3645mm	13' 6"+11' 11"	Uscita stabilizzatori – Outriggers extension – Sortie de bequilles – Breite der Abstützung	4140+3645mm	13' 6"+11' 11"
10105 mm 9330 mm (*)	33' 2" 30' 7" (*)	Larghezza stabilizzatori – Outriggers width – Largeur des bequilles – Gesamtbreite der Abstützung	10105 mm 9330 mm (*)	33' 2" 30' 7" (*)
2441 mm 2715 mm (*)	8' 0" 8' 11" (*)	Lunghezza – Length – Longueur - Gesamtbreite	2441 mm 2715 mm (*)	8' 0" 8' 11" (*)
2521 mm	8' 3"	Larghezza – Width – Largeur - Breite	2521 mm	8' 3"
2580 mm	8' 6"	Altezza – Height – Hauteur - Höhe	2580 mm	8' 6"
13255 kg	29222 lbs	Peso (senza olio e montaggio) – Weight (without oil and fitting) Poids (sans huile et montage – Gewicht (ohne Öl und ohne)	13450 kg	29652 lbs
115 l/min	30 us gal/min	Portata pompa – Pump delivery – Capacité de la pompe - Pumpenleistung	115 l/min	30 us gal/min
315 bar	4479 psi	Pressione – Pressure – Pression - Druck	315 bar	4479 psi
450 l	118 us gal	Capacità serbatoio olio – Oil tank capacity – Capacité du réservoir de l'huile – Öl tank inhalt	450 l	118 us gal