



# 50000 WB80

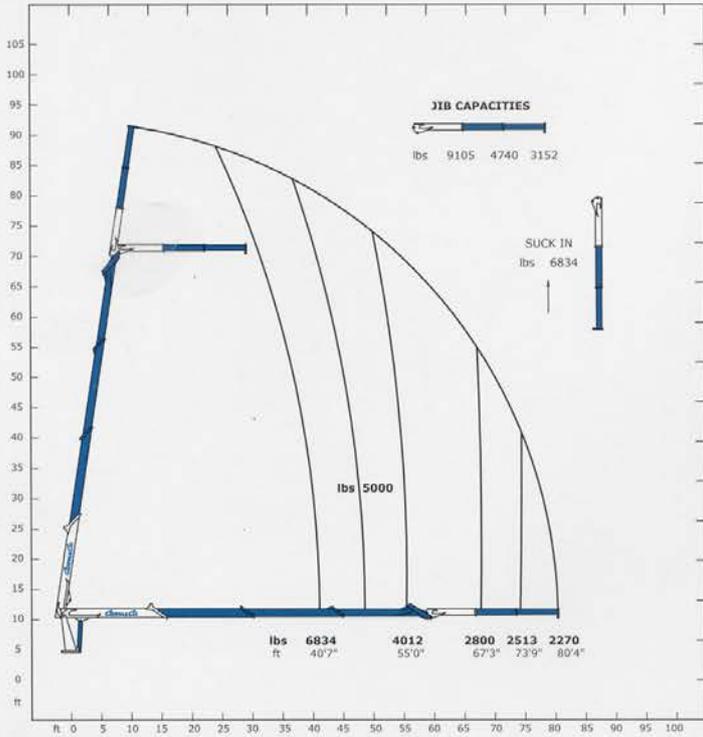

# 50000 WB87

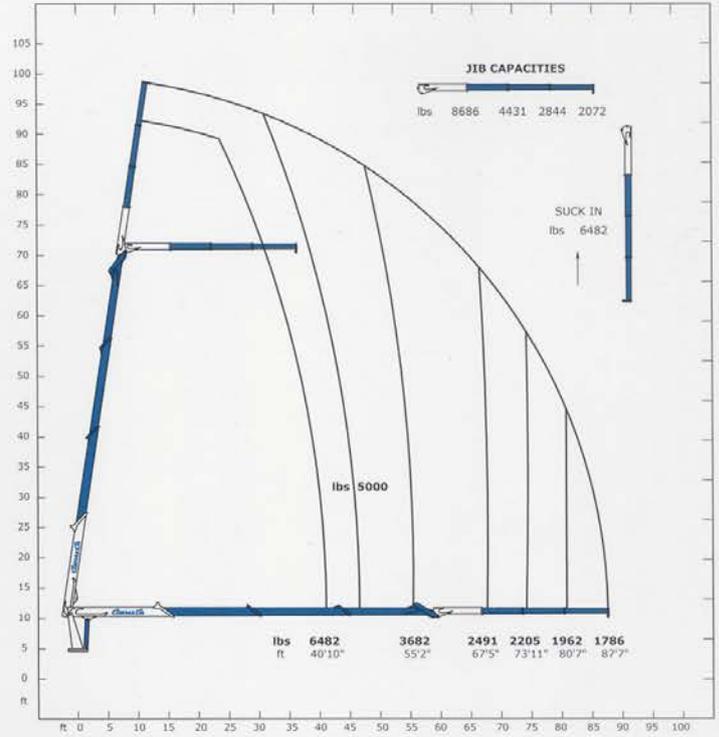

## 50000 WB80

## 50000 WB87

63.0 TM	Ton Meter Rating	63.0 TM
464,663 ft lbs	Foot Pound Rating	464,663 ft lbs
80' 4"	Horizontal Hydraulic Reach	87' 7"
90' 6"	Approx. Vertical Reach	98' 2"
2,270 lbs @80' 4"	Horizontal Lifting capacity excluding weight of fork	1,786 lbs @87' 7"
2,513 lbs @73' 9"		1,962 lbs @80' 7"
2,800 lbs @67' 3"		2,205 lbs @73' 11"
4,012 lbs @55' 0"		2,491 lbs @67' 5"
6,834 lbs @40' 7"		3,682 lbs @55' 2"
3		Hydraulic Extensions Main Boom
2	Hydraulic Extensions Outer Boom	3
360° Continuous	Crane Rotation	360° Continuous
Brg. Ring & Pinion	Crane Rotation Type	Brg. Ring & Pinion
2 each side of operators seat arm plus 3 foot pedals	Control Levers – and – Control Location	2 each side of operators seat arm plus 3 foot pedals
DANFOSS	Main Control Valve Type	DANFOSS
Option	Radio Remote Control System	Option
4,640 PSI	Max. Operating Hydraulic Pressure	4,640 PSI
	Hydraulic Piston Pump Type Required	
	Variable Displacement – Load Sensing	
26 GPM	Pressure Compensating	26 GPM
66 Gal	Hydraulic Reservoir Capacity	66 Gal
Option	Oil Cooler	Option
Electro-Hydraulic	Lod Limiting Device Type	Electro-Hydraulic
25 feet	Main Crane Base Outrigger Span	25 feet
19' 2"	Auxiliary Rear Outrigger Span	19' 2"
4 Included	Oversize Outrigger Ground Plates	4 Included
45"	Crane Mounting Space Required	45"
Included	Operators Walk Around Platform and Acces ladder	Included
13,450 lbs	Crane Weight Incl. Mount Bolt Kit, & Operators Platform	13,800 lbs
110"	Stowed Height Of Crane Above Sub Frame In Travel Position	110"
78½" x *74½"	Cargo Space Between Body Surface and Underside Of Boom	78½" x *74½"

\* Under knuckle only

Capacity, specifications and dimensions may change without notice

\* Under knuckle only