




27500-E6

A.S.C.plus

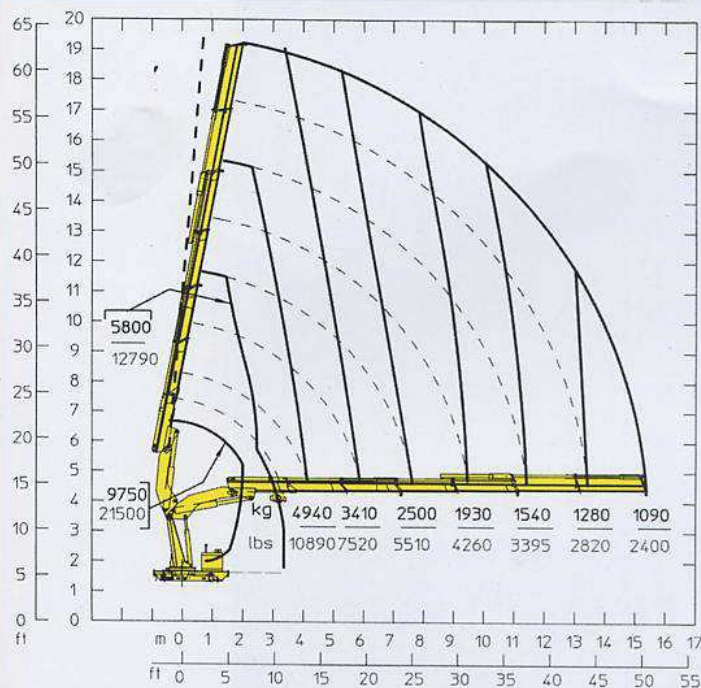

27500-E8


A.S.C.plus

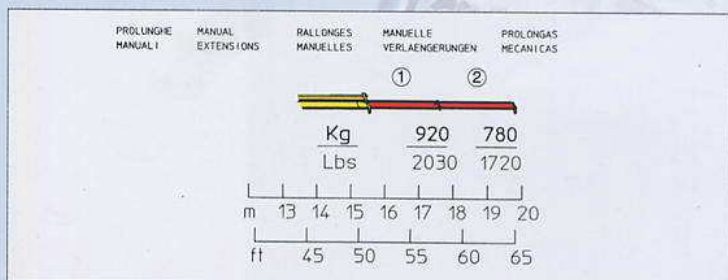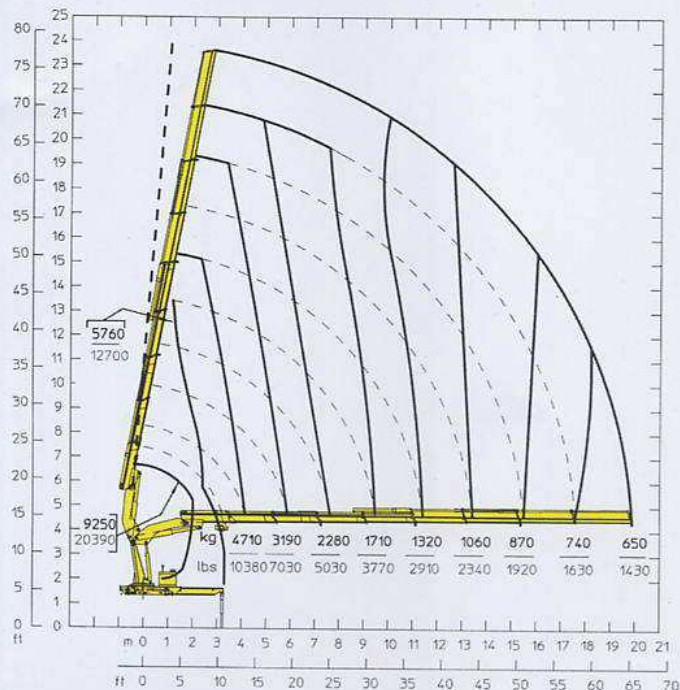

STANDARD




OPTIONAL

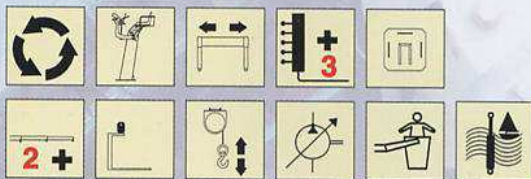

STANDARD



OPTIONAL

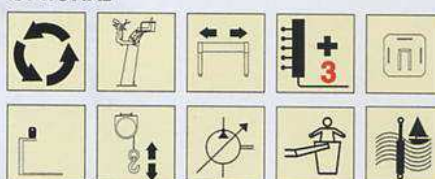

E6

28000 daN • m	202560 lbs • ft
15,54m	50'12"
20,0 m	65'7"
2800 daN • m	20260 lbs • ft
40 sec - 360°	40 sec - 360°
1750+1750 mm	5'9"+5'9"
5838 mm	19'2"
1007 mm	3'4"
2500 mm	8'2"
2230 mm	7'4"
3390 Kg	7480 Lbs
55 lit / min	14,5 us gal/min
300 bar	4270 psi
155	41 us gal

E6

28000 daN • m	202560 lbs • ft
15,54m	50'12"
20,0 m	65'7"
2800 daN • m	20260 lbs • ft
40 sec - 360°	40 sec - 360°
1750+1750 mm	5'9"+5'9"
5838 mm	19'2"
1007 mm	3'4"
2500 mm	8'2"
2230 mm	7'4"
3390 Kg	7480 Lbs
55 lit / min	14,5 us gal/min
300 bar	4270 psi
155	41 us gal

Momento statico massimo al perno torretta - Max. static moment at the turret pin - Moment statique max. à l'axe de la tourelle - Max. statisches Hubmoment am Kransaulenbolzen	
Sbraccio idraulico - Hyd. boom length - Longueur du bras Hyd. - Hyd. Reichweite	
Sbraccio con prolunghe manuali - Boom length with manual extensions - Longueur du bras avec rallonges manuelles - Auslegerlänge - Longitud del brazo hidráulico con prolongas manuales	
Coppia di rotazione - Slew torque - Moment de rotation - Drehmoment	
Tempo di rotazione - Slew speed - Temp de rotation - Schwenkgeschwindigkeit	
Uscita stabilizzatori - Outriggers extension - Sortie des bequilles - Breite der Abstützung	
Larghezza stabilizzatori - Outriggers width - Largeur des bequilles - Gesamtbreite der Abstützung	
Lunghezza - Outriggers - Largeur - Gesamtbreite - Ancho	
Larghezza - Width - Largeur - Breite	
Altezza - Height - Hauteur - Höhe	
Peso (senza olio e montaggio) - Weight (without oil and fitting) - Poids (sans huile et montage) - Gewicht (ohne Öl und ohne)	
Portata pompa - Pump delivery - Capacité de la pompe - Pumpenleistung	
Pressione - Pressure - Pression - Druck	
Capacità serbatoio olio - Oil tank capacity - Capacité du réservoir d'huile - Öl tank inhalt - Aceite	

E8

28000 daN • m	202560 lbs • ft
20,0 m	65'7"
/	/
2800 daN • m	20260 lbs • ft
40 sec - 360°	40 sec - 360°
1750+1750 mm	5'9"+5'9"
5838 mm	19'2"
1007 mm	3'4"
2500 mm	8'2"
2230 mm	7'4"
3610 Kg	7960 Lbs
55 lit / min	14,5 us gal/min
300 bar	4270 psi
155	41 us gal

E8