


6800 E2



E2	E2	
6800 daN*m	49194 Lb*ft	Momento statico massimo al perno torretta • Max. static moment at the turret pin Moment statique max. a l'axe de la tourelle • Max. statisches ubmoment am kransaulenbolzen
6.61 m	21'8"	Sbraccio idraulico • Hydraulic boom length Longueur du bras hydraulique • Hydraulic reichweite
680 daN*m	4919 Lb*ft	Coppia di rotazione • Slew torque • Moment de rotation • Drehmoment
40 sec 360°	40 sec 360°	Tempo di rotazione • Slewing speed • Temp de rotation • Schwenkgeschwindigkeit
1200+1200mm	3'11" + 3'11"	Uscita stabilizzatori (*) • Outriggers extensions (*) Sortie des bequilles (*) • Breite der abstützung (*)
4495 mm	14'9"	Larghezza stabilizzatori (**) • Outriggers width (**) Largeur des bequilles (**) • Breite der abstützung (**)
624 mm	2'1"	Lunghezza • Length • Longueur • Länge
2190 mm	7'2"	Larghezza • Width • Largeur • Breite
1710 mm	5'7"	Altezza • Height • Hauteur • Höhe
985 kg	2172 lbs	Peso (senza olio e montaggio) • Weight (without oil and fitting) Poids (sans huile et montage) • Gewicht (ohne öl und ohne)
14 l/min	4 us gal/min	Portata pompa (***) • Pump delivery (***) • Capacité de la pompe (***) • Pumpenheistung (***)
275 bar	3911 psi	Pressione • Pressure • Pression • Druck
31 l	8 us gal	Capacità serbatoio olio • Oil tank capacity • Capacité de reservoir d'huile • Öl tank inhalt

STANDARD

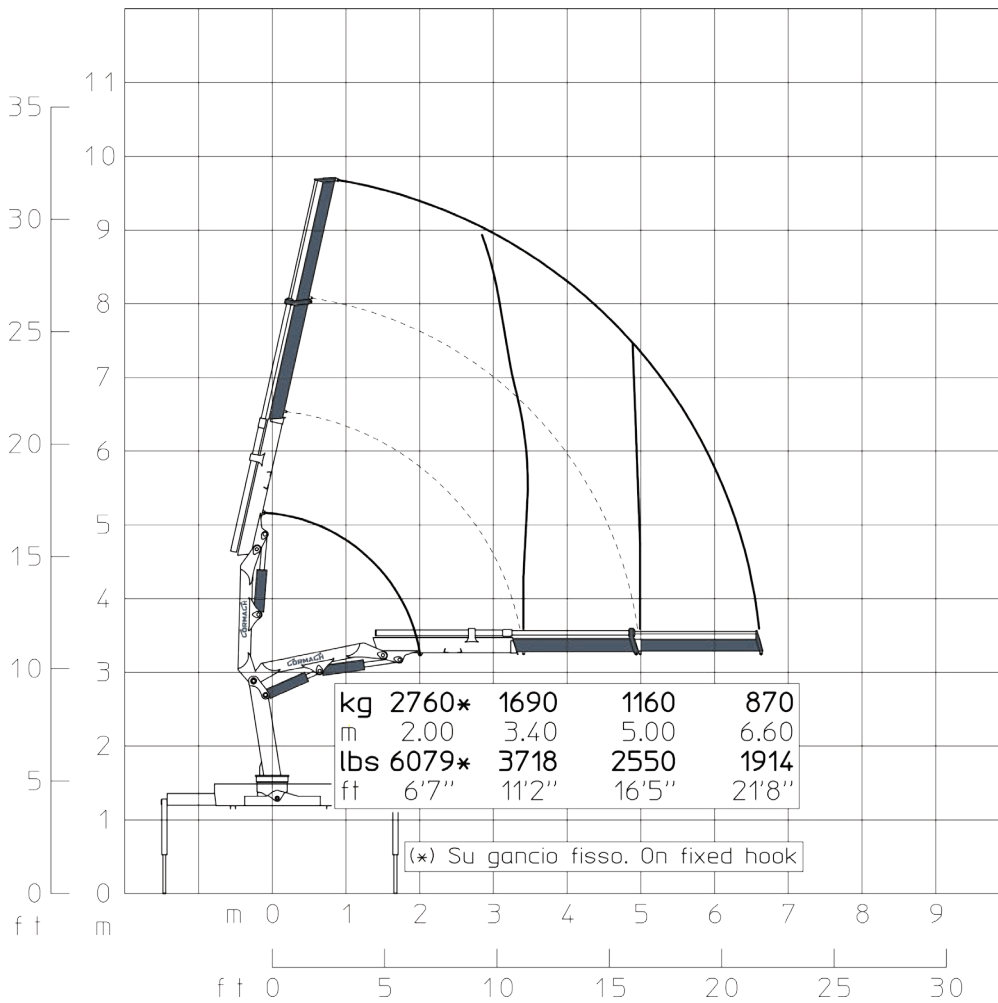

OPTIONAL

