

• Serie 22500 E ASC Plus
• Serie 27500 E ASC Plus

• Serie 27700 S ASC Plus
• Serie 28200 E ASC


• Serie 34000 E ASC Plus
• Serie 39000 E HP




CRANE SERIE 39000 E HP - SELECT THE MODEL:

- E3
- E4
- E5
- E6
- E7
- E8
- E5F62
- E5F63
- E5F64
- E6F62
- E6F63
- E6F64

CRANE E8 - CAPACITY DIAGRAM

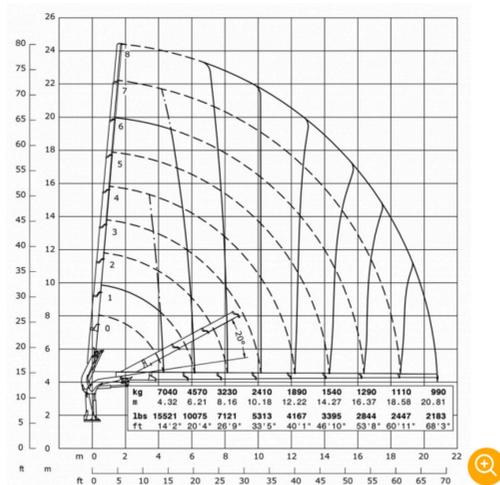

CRANE E8 - TABLE OF DIMENSIONS

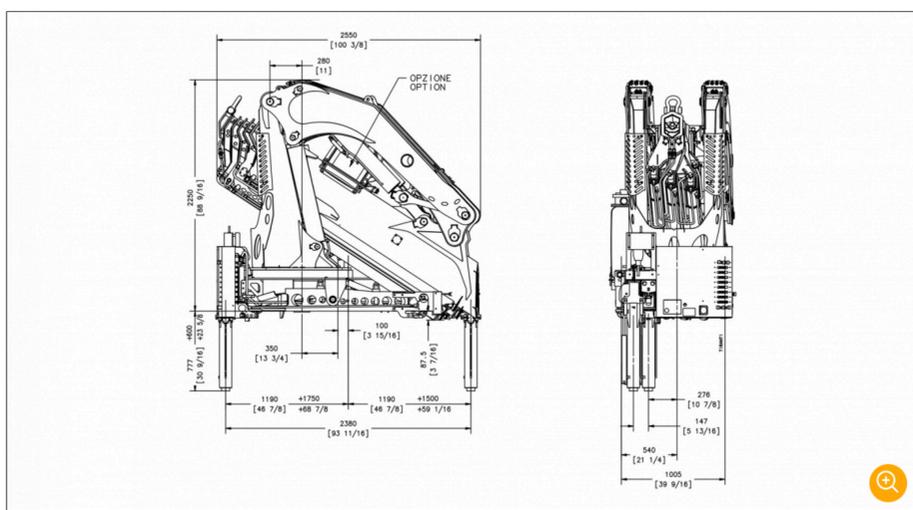

CRANE E8 - INFORMATION SHEET

TECHNICAL CHARACTERISTICS	METRIC SYSTEM	IMPERIAL SYSTEM
Static moment at tower pin	38700 daN/m	279971 lbs/ft
Hydraulic reach	2081 mm	68'3"
Length	1220 mm	4'
Width	2550 mm	8'4"
Height	2250 mm	7'5"
Weight (without oil and assembly)	4435 kg	9777 lbs
Capacity	7040 kg	15521 lbs
Reach with manual extensions		
Slewing torque	3700 daN/m	26767 lbs/ft
Stabiliser protrusion	1500 + 1750 mm	4'11" + 5'9"
Stabiliser width	5630 mm	18'6"
Pump capacity	60 l/min	16 US gal/min
Pressure	315 bar	4479 psi
Tank capacity	160 l	42 US gal



DOWNLOAD THE FULL BROCHURE - PDF


CRANE E8 - SUPPLIED AS STANDARD

- 360° rotation
- Hydraulically extendible base crane stabilisers
- Supplementary control disabled (1)
- Remote control
- HP Continuous acceleration control
- Moment limiter
- Heat exchanger

CRANE E8 - OPTIONAL

- 400° rotation
- Continuous rotation
- Rotating base crane stabilisers
- Extra-wide base crane stabilisers
- Fixed auxiliary crossbeam
- Extendible auxiliary crossbeam
- Supplementary control enabled (1-2)
- Elevated operating position
- Dual moment limiter
- Winch
- Basket
- Self-levelling platform
- Marine crane treatment
- Extended support plates
- Remote control stabiliser check.

STANDARD SERIE 39000 E HP PHOTO GALLERY

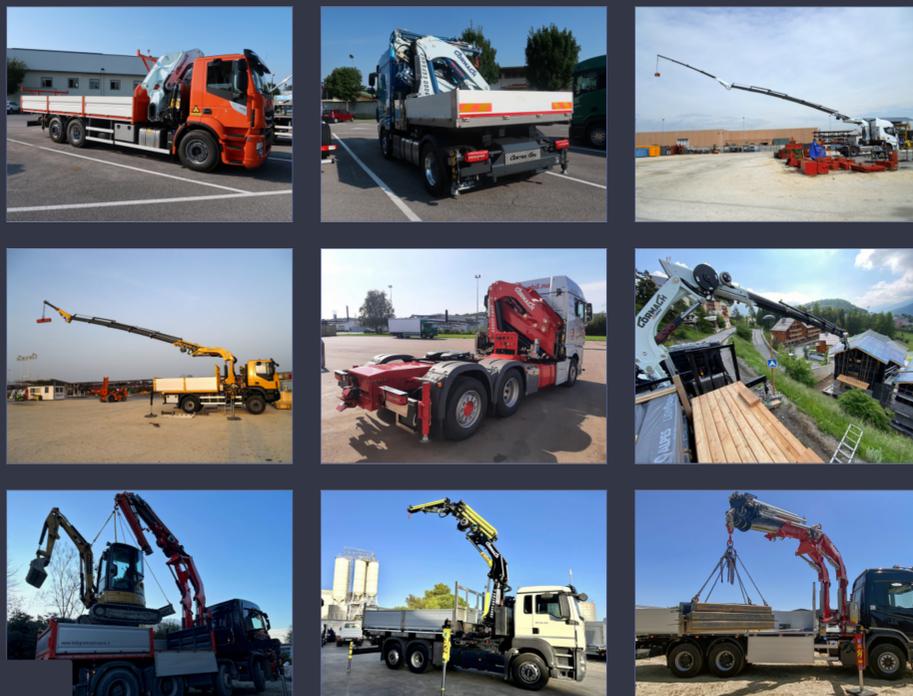

INFORMATIVA

Noi e terze parti selezionate raccogliamo informazioni personali come specificato nella [privacy policy](#) e utilizziamo cookie o tecnologie simili per finalità tecniche e, con il tuo consenso, anche per le finalità di **funzionalità, esperienza e misurazione** come specificato nella [cookie policy](#).
Puoi liberamente prestare, rifiutare o revocare il tuo consenso, in qualsiasi momento, accedendo al pannello delle preferenze. Il rifiuto del consenso può rendere non disponibili le relative funzioni. Usa il pulsante "Accetta tutto" per acconsentire.

- Funzionalità
- Esperienza
- Misurazione

- RANGE**
- LIGHT-DUTY RANGE
- MEDIUM-DUTY RANGE
- HEAVY-DUTY RANGE
- TELESCOPIC CRANES
- SPECIAL CRANES
- CONCRETE INDUSTRY CRANES
- INDUSTRY CRANES
- PORTAL CRANES

- COMPANY PROFILE**
- HOME
- ABOUT US
- OUR TECHNOLOGY
- VIDEOS
- DEALERS
- WORK WITH US
- CONTACT US
- RESERVED AREA

CORMACH SRL
Via Madonna, 27 CP 199 - 25018 Montichiari (BS) - Italy
Telefono: +39.030.9656811 (6 linee r.a.) - Fax: +39.030.9656846
Email: info@cormach.it
P.IVA 00681780987 - C.F. 02075000170
Reg. Imp. BS: 02075000170 - REA BS: 291719

PRIVACY | COOKIES | WHISTLEBLOWING
Web design: [Studio Impronta](#)