




75000 E8 HP

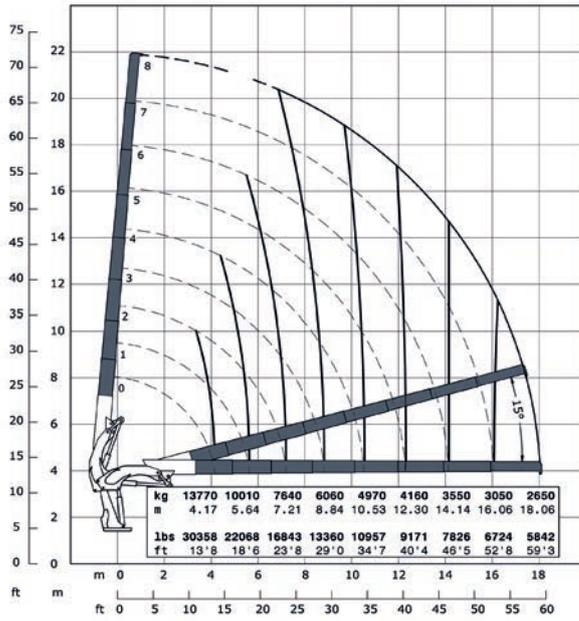

75000 E9 HP

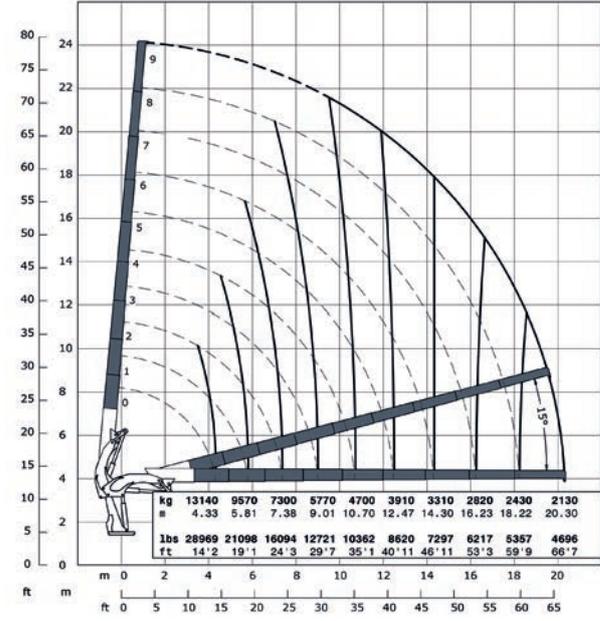

STANDARD




OPTIONAL



STANDARD



OPTIONAL



E8	E8		E9	E9
74750 da N*m	540771 Lb*ft	Momento statico massimo al perno torretta • Max. static moment at the turret pin Moment statique max. a l'axe de la tourelle • Max. statisches ubmoment am kransaulenbolzen	74750 da N*m	540771 Lb*ft
18.06 m	59' 3" ft	Sbraccio idraulico • Hydraulic boom length Longueur du bras hydraulique • Hydraulic reichweite	20.30 m	66' 7" ft
7100 da N*m	51364 Lb*ft	Coppia di rotazione • Slew torque • Moment de rotation • Drehmoment	7100 da N*m	51364 Lb*ft
sec. 90 - 360°	sec. 90 - 360°	Tempo di rotazione • Slewing speed • Temp de rotation • Schwenkgeschwindigkeit	sec. 90 - 360°	sec. 90 - 360°
3625+2875 mm	11' 11" + 9' 5" ft	Uscita stabilizzatori • Outriggers extensions Sortie des bequilles • Breite der abstützung	3625+2875 mm	11' 11" + 9' 5" ft
8850 mm	29' ft	Larghezza stabilizzatori • Outriggers width Largeur des bequilles • Breite der abstützung	8850 mm	29' ft
1645 mm	5' 5" ft	Lunghezza • Length • Longeur • Länge	1645 mm	5' 5" ft
2550 mm	8' 4" ft	Larghezza • Width • Largeur • Breite	2550 mm	8' 4" ft
2621 mm	8' 7" ft	Altezza • Height • Huteur • Höhe	2621 mm	8' 7" ft
7408 Kg	16331 lbs	Peso (senza olio e montaggio) • Weight (without oil and fitting) Poids (sans huile et montage) • Gewicht (ohne öl und ohne)	7626 Kg	16812 lbs
100 l/min	26 us gal/min	Portata pompa (*) • Pump delivery (*) • Capacité de la pompe (*) • Pumpenleistung (*)	100 l/min	26 us gal/min
320 bar	4550 psi	Pressione • Pressure • Pression • Druck	320 bar	4550 psi
235 l	62 us gal	Capacità serbatoio olio • Oil tank capacity • Capacité de reservoir d'huile • Öl tank inhalt	235 l	62 us gal

(*) Consigliata, (*) Recommended, (*) Reconnué, (*) Empfohlen