



12000-E1



STANDARD

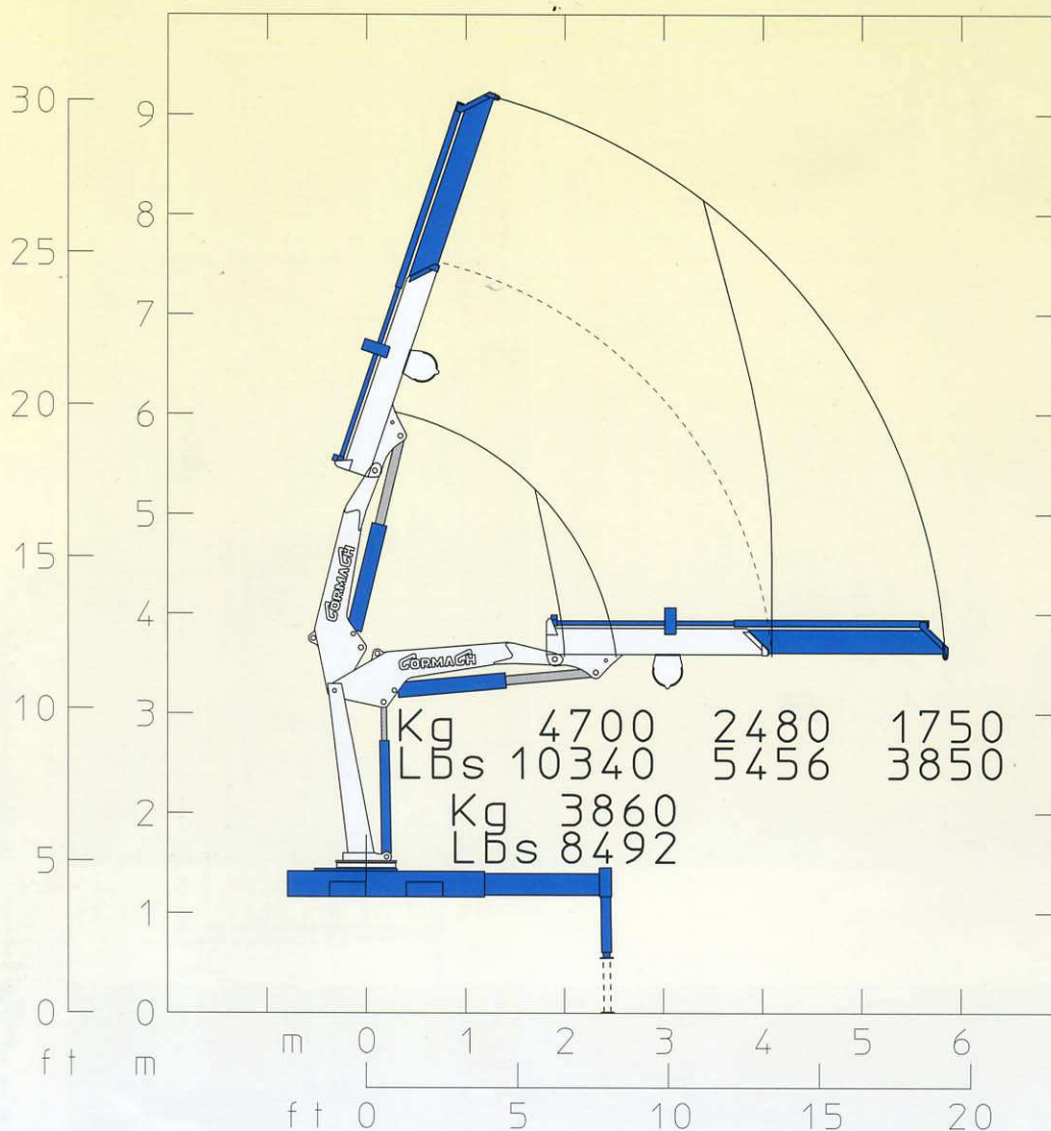

OPTIONAL



E1		
12300 daN*m	88983 Lb*ft	Momento statico massimo al perno torretta – Max. static moment at the turret pin Moment statique max. a l'axe de la tourelle – Max. statisches ubmoment am kranaulenbolzen
5.84 m	19' 2"	Sbraccio idraulico – Hydraulic boom length – Longueur du bras hydraulique – Hydraulic reichweite
		Sbraccio con prolunghe manuali – Boom length with manual extension – Longueur du bras avec rallonges manuelles – Auslegerlänge
870 daN*m	6294 Lb*ft	Coppia di rotazione – Slew torque – Moment de rotation – Drehmoment
39 sec 360°	39 sec 360°	Tempo di rotazione – Slew speed – Temp de rotation – Schwenkgeschwindigkeit
1400+1300mm	4' 7"+4' 3"	Uscita stabilizzatori – Outriggers extension – Sortie de bequilles – Breite der Abstützung
4850 mm	15' 11"	Larghezza stabilizzatori – Outriggers width – Largeur des bequilles – Gesamtbreite der Abstützung
793 mm	2' 7"	Lunghezza – Length – Longueur – Gesamtbreite
2405 mm	7' 11"	Larghezza – Width – Largeur – Breite
2160 mm	7' 1"	Altezza – Height – Hauteur – Höhe
1520 kg	3351 lbs	Peso (senza olio e montaggio) – Weight (without oil and fitting) – Poids (sans huile et montage – Gewicht (ohne Öl und ohne)
25 l/min	7 us gal/min	Portata pompa – Pump delivery – Capacité de la pompe – Pumpenleistung
275 bar	3911 psi	Pressione – Pressure – Pression – Druck
57 l	15 us gal	Capacità serbatoio olio – Oil tank capacity – Capacité du réservoir de l'huile – Öl tank inhalt