

- Serie 50000 E ASC Plus
- Serie 60000 E ASC Plus
- Serie 71000 E ASC Plus
- Serie 75000 E HP
- Serie 87000 E ASC Plus

- Serie 95000 E HP
- Serie 110000 E ASC Plus
- Serie 110000X E ASC Plus
- Serie 135000 E ASC Plus
- Serie 135000X E ASC Plus

- Serie 150000 E HP
- Serie 150000X E HP
- Serie 180000 E ASC Plus
- Serie 185000A E
- Serie 185000AX E


- Serie 240000A E
- Serie 240000AX E
- Serie 575000AXO E




CRANE SERIE 50000 E ASC PLUS - SELECT THE MODEL:

E3	E4	E5	E6	E7	E8	E9	E11	E5F132	E5F133	E5F134	E7F132	E7F133	E7F134
E9F62	E9F63	E9F64											

CRANE E6 - CAPACITY DIAGRAM

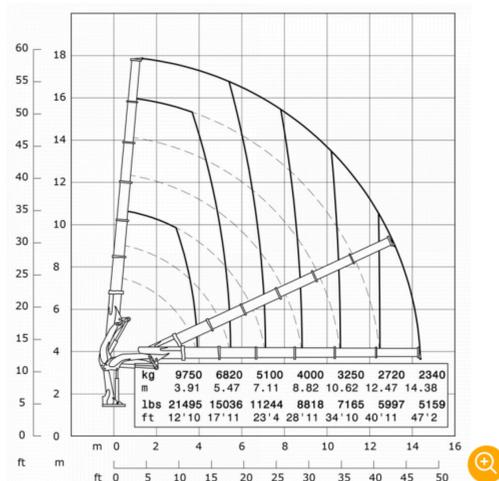


CRANE E6 - TABLE OF DIMENSIONS

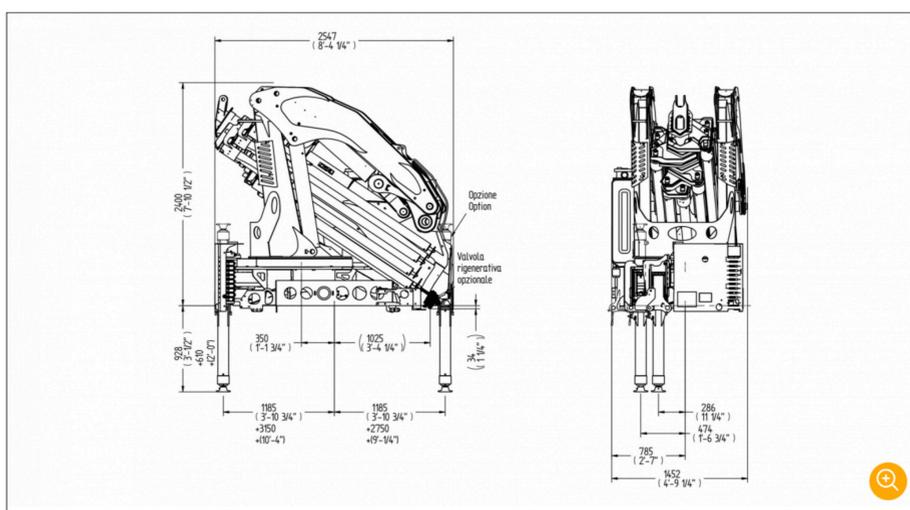

CRANE E6 - INFORMATION SHEET

TECHNICAL CHARACTERISTICS	METRIC SYSTEM	IMPERIAL SYSTEM
Static moment at tower pin	48700 daN/m	352315 lbs/ft
Hydraulic reach	14380 mm	47'2"
Length	1419 mm	4'8"
Width	2547 mm	8'4"
Height	2400 mm	7'10"
Weight (without oil and assembly)	5130 kg	11310 lbs
Capacity	9750 kg	21495 lbs
Reach with manual extensions		
Slewing torque	4500 daN/m	32554 lbs/ft
Stabiliser protrusion	3150 + 2750 mm	10'4" + 9'
Stabiliser width	8270 mm	27'2"
Pump capacity	80 l/min	21 US gal/min
Pressure	320 bar	4650 psi
Tank capacity	200 l	52 US gal




CRANE E6 - SUPPLIED AS STANDARD

- Continuous rotation
- Hydraulically extendible base crane stabilisers
- Supplementary control disabled (1)
- Remote control
- Automatic Speed Control
- Moment limiter
- Heat exchanger
- Extended support plates

CRANE E6 - OPTIONAL

- Rotating base crane stabilisers
- Extendible auxiliary crossbeam
- Supplementary control enabled (1-2)
- Dual moment limiter
- Winch
- Basket
- Self-levelling platform
- Marine crane treatment
- Remote control stabiliser check.

STANDARD SERIE 50000 E ASC PLUS PHOTO GALLERY

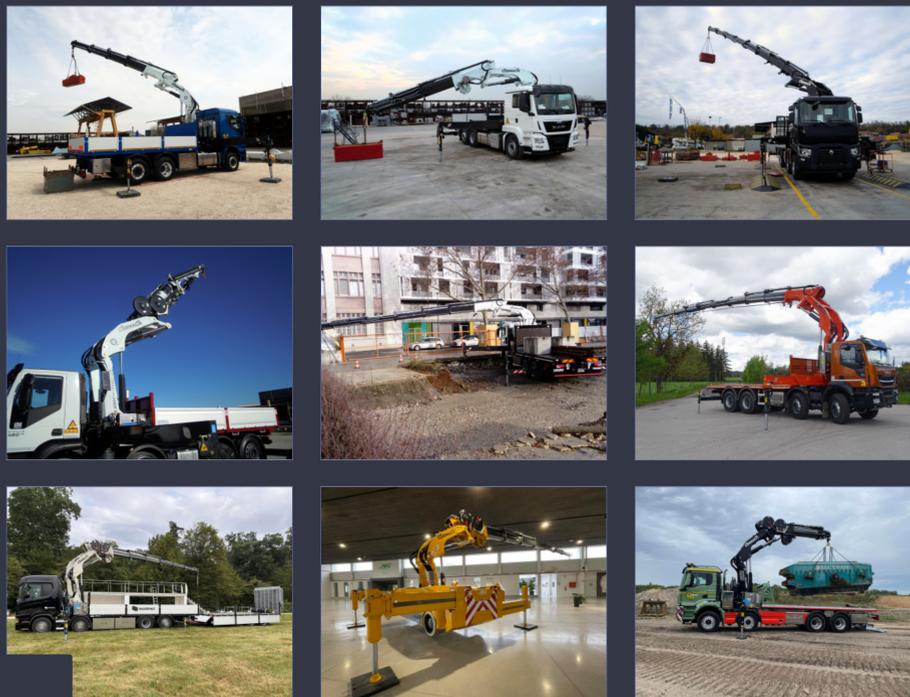

INFORMATIVA
 Noi e terze parti selezionate raccogliamo informazioni personali come specificato nella privacy policy e utilizziamo cookie o tecnologie simili per finalità tecniche e, con il tuo consenso, anche per le finalità di funzionalità, esperienza e misurazione come specificato nella cookie policy.
 Puoi liberamente prestare, rifiutare o revocare il tuo consenso, in qualsiasi momento, accedendo al pannello delle preferenze. Il rifiuto del consenso può rendere non disponibili le relative funzioni. Usa il pulsante "Accetta tutto" per acconsentire.

- Funzionalità
- Esperienza
- Misurazione

- LIGHT-DUTY RANGE
- MEDIUM-DUTY RANGE
- HEAVY-DUTY RANGE
- TELESCOPIC CRANES
- SPECIAL CRANES
- CONCRETE INDUSTRY CRANES
- INDUSTRY CRANES
- PORTAL CRANES

- COMPANY PROFILE
- HOME
- ABOUT US
- OUR TECHNOLOGY
- VIDEOS
- DEALERS
- WORK WITH US
- CONTACT US
- RESERVED AREA

CORMACH SRL
 Via Madonna, 27 CP 199 - 25018 Montichiari (BS) - Italy
 Telefono: +39.030.9656811 (6 linee r.a.) - Fax: +39.030.9656846
 Email: info@cormach.it
 P.IVA 00681780987 - C.F. 02075000170
 Reg. Imp. BS: 02075000170 - REA BS: 291719
 PRIVACY | COOKIES | WHISTLEBLOWING
 Web design: Studio Impronta