



71000 E A.S.C. Plus

71000 E2

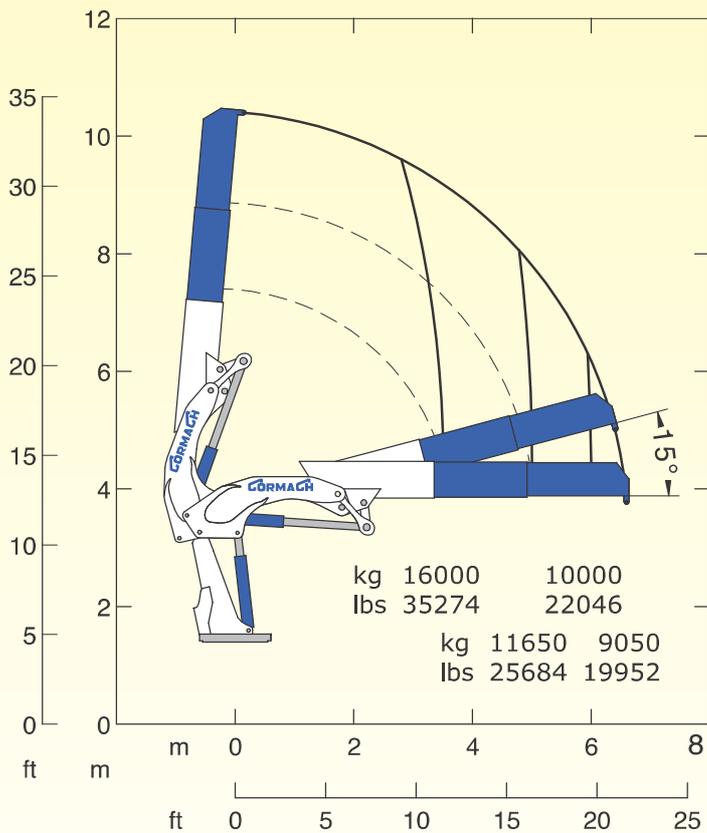

71000 E3

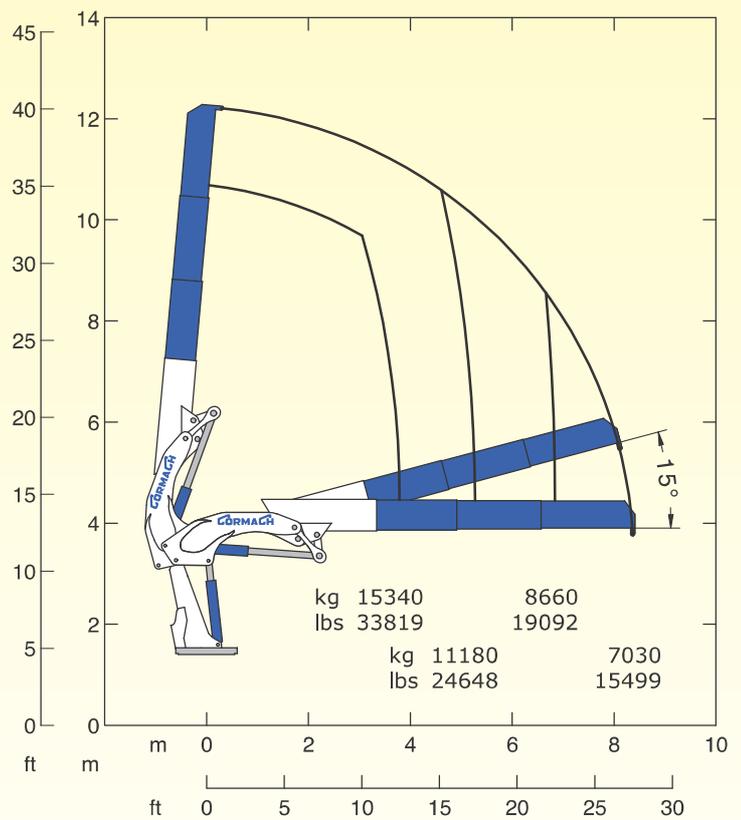

STANDARD



OPTIONAL



STANDARD



OPTIONAL



| E2 | E2 | | E3 | E3 |
|-------------|---------------|--|-------------|---------------|
| 71200 daN*m | 515089 Lb*ft | Momento statico massimo al perno torretta – Max. static moment at the turret pin Moment statique max. a l'axe de la tourelle – Max. statisches ubmoment am kransaulenboizen | 71200 daN*m | 515089 Lb*ft |
| 6.64 m | 21' 9" | Sbraccio idraulico – Hydraulic boom lenght Longueur du bras hydraulique – Hydraulisch reichweite | 8.39 m | 27' 6" |
| | | Sbraccio con prolunghe manuali – Boom length with manual extension Longueur du bras avec rallonges manuelles - Auslegerlänge | | |
| 7100 daN*m | 51364 Lb*ft | Coppia di rotazione – Slew torque – Moment de rotation – Drehmoment | 7100 daN*m | 51364 Lb*ft |
| 90 sec 360° | 90 sec 360° | Tempo di rotazione – Slewing speed – Temp de rotation – Schwenkgeschwindigkeit | 90 sec 360° | 90 sec 360° |
| 3625+2875mm | 11' 11"+9' 5" | Uscita stabilizzatori – Outriggers extension – Sortie de bequilles – Breite der Abstützung | 3625+2875mm | 11' 11"+9' 5" |
| 8850 mm | 29' 0" | Larghezza stabilizzatori – Outriggers width – Largeur des bequilles – Gesamtbreite der Abstützung | 8850 mm | 29' 0" |
| 1645 mm | 5' 5" | Lunghezza – Length – Longueur - Gesamtbreite | 1645 mm | 5' 5" |
| 2550 mm | 8' 4" | Larghezza – Width – Largeur - Breite | 2550 mm | 8' 4" |
| 2611 mm | 8' 7" | Altezza – Height – Hauteur - Höhe | 2611 mm | 8' 7" |
| 5973 kg | 13168 lbs | Peso (senza olio e montaggio) – Weight (without oil and fitting) Poids (sans huile et montage – Gewicht (ohne Öl und ohne) | 6251 kg | 13781 lbs |
| 100 l/min | 26 us gal/min | Portata pompa – Pump delivery – Capacité de la pompe - Pumpenleistung | 100 l/min | 26 us gal/min |
| 320 bar | 4550 psi | Pressione (*) – Pressure (*) – Pression (*) - Druck (*) | 320 bar | 4550 psi |
| 235 l | 62 us gal | Capacità serbatoio olio – Oil tank capacity – Capacité du réservoir de l'huile – Öl tank inhalt | 235 l | 62 us gal |

71000 E A.S.C. Plus

| E2 | | E3 | | E4 | | E5 | | E6 | | E7 | | E8 | | E9 | | E11 | |
|--------|--------|-------|--------|--------|--------|-------|--------|-------|--------|--------|--------|-------|--------|--------|--------|--------|--------|
| m/ft | kg/lbs | m/ft | kg/lbs | m/ft | kg/lbs | m/ft | kg/lbs | m/ft | kg/lbs | m/ft | kg/lbs | m/ft | kg/lbs | m/ft | kg/lbs | m/ft | kg/lbs |
| 3.60 | 16000 | 3.72 | 15340 | 3.80 | 14850 | 3.89 | 14400 | 4.00 | 13840 | 4.28 | 12850 | 4.17 | 13020 | 4.33 | 12410 | 4.40 | 12020 |
| 11'10" | 35274 | 12'2" | 33819 | 12'6" | 32738 | 12'9" | 31747 | 13'1" | 30512 | 14'1" | 28329 | 13'8" | 28704 | 14'2" | 27359 | 14'5" | 26500 |
| 5.07 | 11650 | 5.19 | 11180 | 5.28 | 10820 | 5.36 | 10470 | 5.48 | 10070 | 5.76 | 9420 | 5.64 | 9450 | 5.81 | 9010 | 5.88 | 8698 |
| 16'8" | 25684 | 17'0" | 24648 | 17'4" | 23854 | 17'7" | 23082 | 18'0" | 22200 | 18'11" | 20768 | 18'6" | 20834 | 19'1" | 19864 | 19'4" | 19158 |
| 6.64 | 9050 | 6.76 | 8660 | 6.85 | 8350 | 6.93 | 8050 | 7.05 | 7730 | 7.33 | 7240 | 7.21 | 7180 | 7.38 | 6850 | 7.45 | 6550 |
| 21'9" | 19952 | 22'2" | 19092 | 22'6" | 18408 | 22'9" | 17747 | 23'2" | 17042 | 24'1" | 15961 | 23'8" | 15829 | 24'2" | 15102 | 24'5" | 14440 |
| | | 8.39 | 7030 | 8.48 | 6750 | 8.56 | 6480 | 8.68 | 6190 | 8.96 | 5790 | 8.84 | 5700 | 9.01 | 5400 | 9.08 | 5110 |
| | | 27'6" | 15499 | 27'10" | 14881 | 28'1" | 14286 | 28'6" | 13647 | 29'5" | 12765 | 29'0" | 12566 | 29'6" | 11905 | 29'9" | 11266 |
| | | | | 10.20 | 5640 | 10.28 | 5380 | 10.40 | 5110 | 10.65 | 4780 | 10.53 | 4630 | 10.70 | 4370 | 10.77 | 4090 |
| | | | | 33'6" | 12434 | 33'9" | 11861 | 34'1" | 11266 | 34'11" | 10538 | 34'7" | 10207 | 35'1" | 9634 | 35'4" | 9017 |
| | | | | | | 12.05 | 4600 | 12.17 | 4330 | 12.42 | 4030 | 12.30 | 3870 | 12.47 | 3620 | 12.54 | 3350 |
| | | | | | | 39'6" | 10141 | 40'0" | 9546 | 40'9" | 8885 | 40'4" | 8532 | 40'11" | 7981 | 41'2" | 7385 |
| | | | | | | | | 14.00 | 3760 | 14.25 | 3470 | 14.14 | 3300 | 14.30 | 3070 | 14.37 | 2790 |
| | | | | | | | | 46'0" | 8289 | 46'9" | 7650 | 46'5" | 7275 | 46'11" | 6768 | 47'2" | 6151 |
| | | | | | | | | | | 16.17 | 3020 | 16.06 | 2850 | 16.23 | 2620 | 16.30 | 2350 |
| | | | | | | | | | | 53'1" | 6658 | 52'8" | 6283 | 53'3" | 5776 | 53'6" | 5181 |
| | | | | | | | | | | | | 18.06 | 2480 | 18.22 | 2250 | 18.29 | 1980 |
| | | | | | | | | | | | | 59'3" | 5467 | 59'9" | 4960 | 60'0" | 4365 |
| | | | | | | | | | | | | | | 20.30 | 2000 | 20.36 | 1700 |
| | | | | | | | | | | | | | | 66'7" | 4409 | 66'10" | 3748 |
| | | | | | | | | | | | | | | | | 22.43 | 1500 |
| | | | | | | | | | | | | | | | | 73'7" | 3307 |
| | | | | | | | | | | | | | | | | 24.50 | 1360 |
| | | | | | | | | | | | | | | | | 80'5" | 2998 |



71000 E7F186 A.S.C. Plus



E7F182E7F183E7F184E7F185E7F186



71000 E A.S.C. Plus

71000 E9F134 A.S.C. Plus



E9F132 E9F133 E9F134