




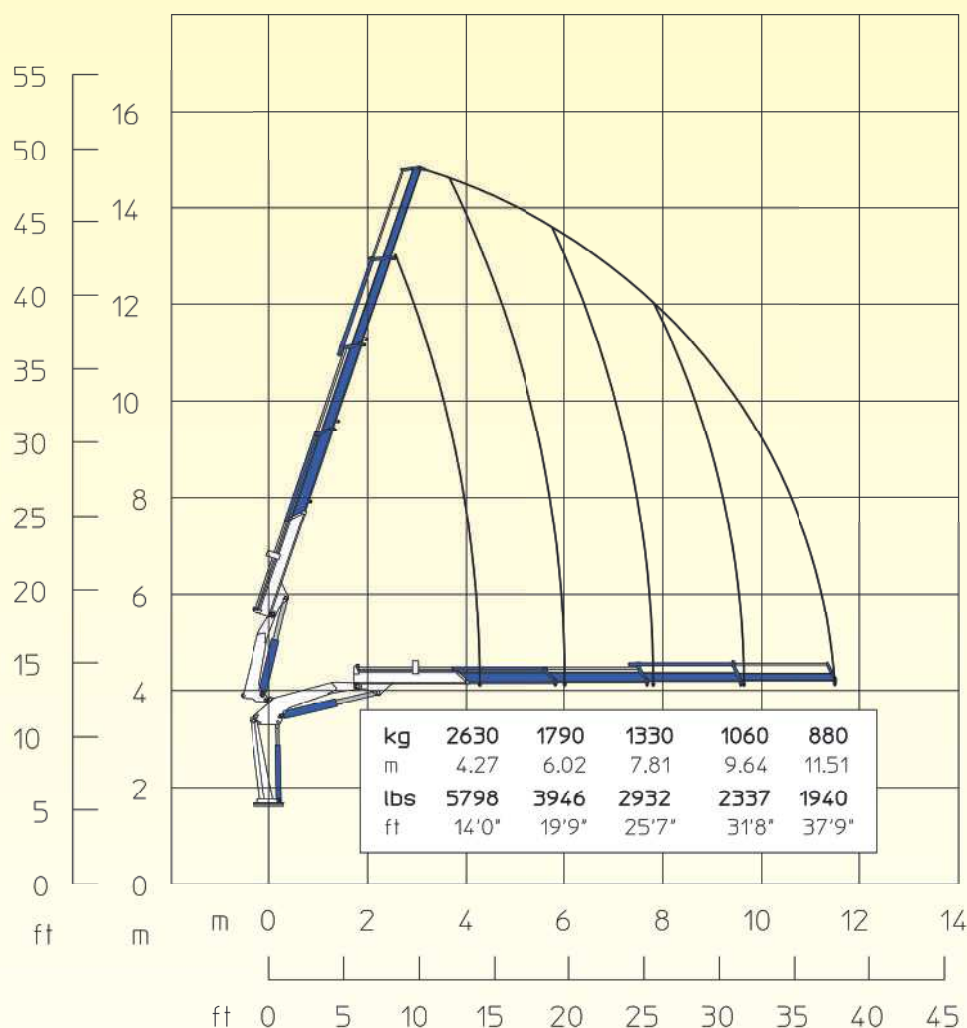

STANDARD



OPTIONAL

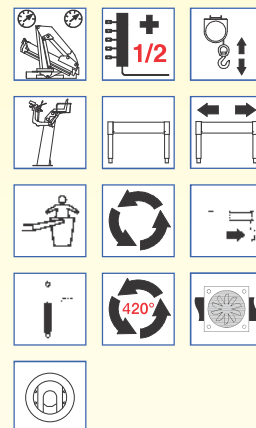

E4	E4	
14000 daN*m	101281 Lb*ft	Momento statico massimo al perno torretta • Max. static moment at the turret pin Moment statique max. a l'axe de la tourelle • Max. statisches ubmoment am kran Saulenbolzen
11.51 m	37' 9"	Sbraccio idraulico • Hydraulic boom length Longueur du bras hydraulique • Hydraulic reichweite
		Sbraccio con prolunghe manuali • Boom length with manual extensions Longueur du bras avec rallonges manuelles
870 daN*m	6293 Lb*ft	Coppia di rotazione • Slew torque • Moment de rotation • Drehmoment
39 s 360°	39 s 360°	Tempo di rotazione • Slewing speed • Temp de rotation • Schwenkgeschwindigkeit
1400+1300 mm	4' 7" + 4' 3"	Uscita stabilizzatori • Outriggers extensions Sortie des bequilles • Breite der abstützung
4850 mm	15' 11"	Larghezza stabilizzatori • Outriggers width Largeur des bequilles • Breite der abstützung
793 mm	2' 7"	Lunghezza • Length • Longeur • Länge
2405 mm	7' 11"	Larghezza • Width • Largeur • Breite
2160 mm	7' 1"	Altezza • Height • Hauteur • Höhe
1835 kg	4046 lbs	Peso (senza olio e montaggio) • Weight (without oil and fitting) Poids (sans huile et montage) • Gewicht (ohne öl und ohne)
25 l/min	6 us gal/min	Portata pompa (*) • Pump delivery (*) • Capacité de la pompe (*) • Pumpenleistung (*)
295 bar	4149 psi	Pressione • Pressure • Pression • Druck
57 l	15 us gal	Capacità serbatoio olio • Oil tank capacity • Capacité de reservoir d'huile • Öl tank inhalt