



135000 E8F304 - 135000X E8F304

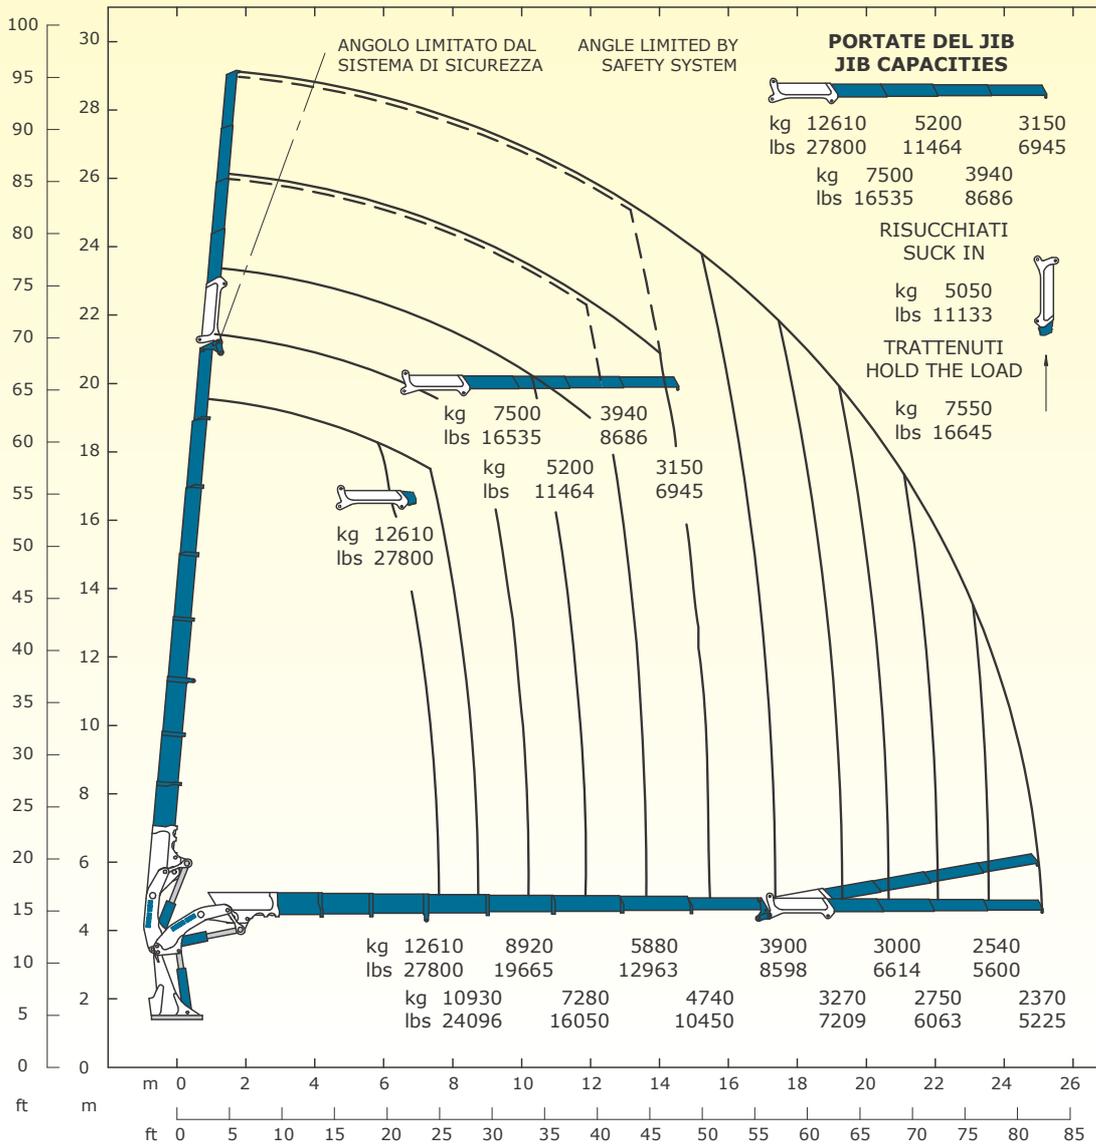


E8F304

136300 daN*m	986048 Lb*ft	Momento statico massimo al perno torretta – Max. static moment at the turret pin Moment statique max. a l'axe de la tourelle – Max. statisches ubmoment am kransaulenbolzen
25.10 m	82' 4"	Sbraccio idraulico – Hydraulic boom length Longueur du bras hydraulique – Hydraulic reichweite
13000 daN*m	94047 Lb*ft	Sbraccio con prolunghe manuali – Boom length with manual extension Longueur du bras avec rallonges manuelles – Auslegerlänge
90 sec 360°	90 sec 360°	Coppia di rotazione – Slew torque – Moment de rotation – Drehmoment
4140+3645mm	13' 6"+11' 11"	Uscita stabilizzatori – Outriggers extension – Sortie de bequilles – Breite der Abstützung
10105 mm 9330 mm (*)	33' 2" 30' 7" (*)	Larghezza stabilizzatori – Outriggers width – Largeur des bequilles – Gesamtbreite der Abstützung
2441 mm 2715 mm (*)	8' 0" 8' 11" (*)	Lunghezza – Length – Longueur – Gesamtbreite
2550 mm	8' 4"	Larghezza – Width – Largeur – Breite
2950 mm	9' 8"	Altezza – Height – Hauteur – Höhe
14810 kg	32651 lbs	Peso (senza olio e montaggio) – Weight (without oil and fitting) Poids (sans huile et montage – Gewicht (ohne Öl und ohne)
115 l/min	30 us gal/min	Portata pompa – Pump delivery – Capacité de la pompe – Pumpenleistung
315 bar	4479 psi	Pressione – Pressure – Pression – Druck
450 l	118 us gal	Capacità serbatoio olio – Oil tank capacity – Capacité du réservoir de l'huile – Öl tank inhalt

STANDARD



OPTIONAL



(*) Versione con stabilizzatori a X – Version with outriggers X – Version avec bequilles a X – Abstützung X