



F110AK


.21

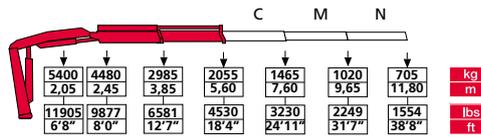

.22

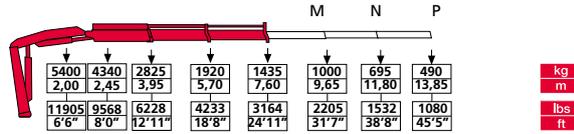


.23

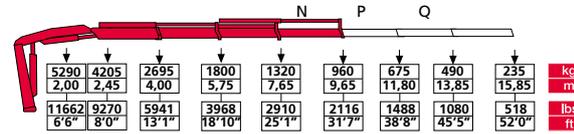


	tm	lbs.ft	m	ft	°	kNm	lbs.ft	Mpa	psi	l/min	gal/min	oil	l	gal	kg	lbs
F110AK.21	11,50	83180	5,80	19'0"	390	17,6	12981	30,0	4351	30	7,9	70	18	1440	3175	
F110AK.22	11,15	80648	7,80	25'7"	390	17,6	12981	30,0	4351	30	7,9	70	18	1580	3483	
F110AK.23	10,80	78116	9,85	32'4"	390	17,6	12981	30,0	4351	30	7,9	70	18	1710	3770	

F130AK


.21

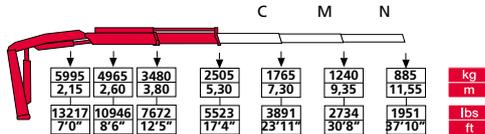

.22

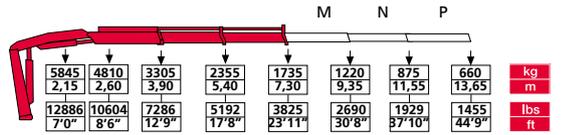


.23

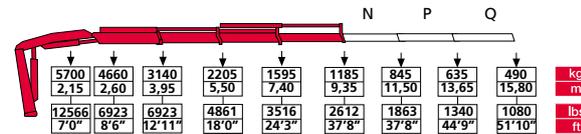


	tm	lbs.ft	m	ft	°	kNm	lbs.ft	Mpa	psi	l/min	gal/min	oil	l	gal	kg	lbs
F130AK.21	13,30	96199	5,55	18'3"	390	21,5	15858	28,5	4134	40	10,6	90	24	1635	3605	
F130AK.22	12,90	93306	7,50	24'7"	390	21,5	15858	28,5	4134	40	10,6	90	24	1795	3957	
F130AK.23	12,40	89689	9,60	31'6"	390	21,5	15858	28,5	4134	40	10,6	90	24	1950	4299	

F150AK


.21

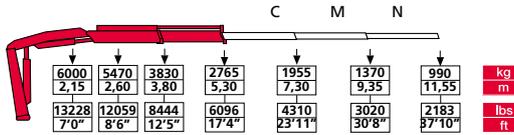

.22

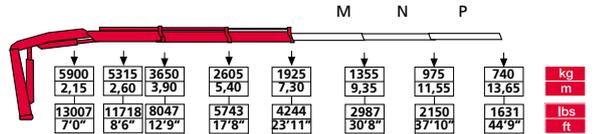

.23

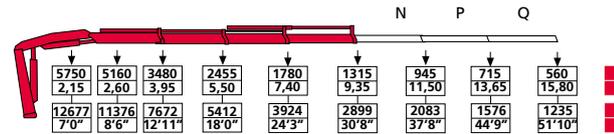

	tm	lbs.ft	m	ft	°	kNm	lbs.ft	Mpa	psi	l/min	gal/min	oil	l	gal	kg	lbs
F150AK.21	14,65	105963	5,55	18'3"	390	21,5	15858	29,0	4206	40	10,6	90	24	1645	3627	
F150AK.22	14,25	103070	7,50	24'7"	390	21,5	15858	29,0	4206	40	10,6	90	24	1805	3979	
F150AK.23	13,75	99454	9,60	31'6"	390	21,5	15858	29,0	4206	40	10,6	90	24	1960	4321	