

TECHNICAL DATA	F390SE.22
Lifting capacity	267622 lbs.ft
Standard reach	61'10" ft
Hydraulic extension	34'5" ft
Rotation arc	430°
Rotation torque	49112 lbs.ft
Working pressure	4206 psi
Pump capacity	16+16 gal/min
Oil tank capacity	66 gal
Outriggers spread crane	23'6" ft
Supplementary outriggers	16'4"'''
Max Crane Angle	80°
*Weight	12566 lbs


TRUCK DATA	
SBA WB: 275"-295"	13.5k tag or pusher
SFA WB: 290" - 300"	(depending on state laws)
20k front axle	Full double frame
46k rear tandems	(RBM 3-3.2 million per rail)


<b>CERTIFIED DYNAMIC PERFORMANCE</b>	Dynamic load diagrams calculated, tested and certified to lift the loads at the declared reaches unless indicated
--------------------------------------	---

\* Ground Control Crane Weight

## technical drawings

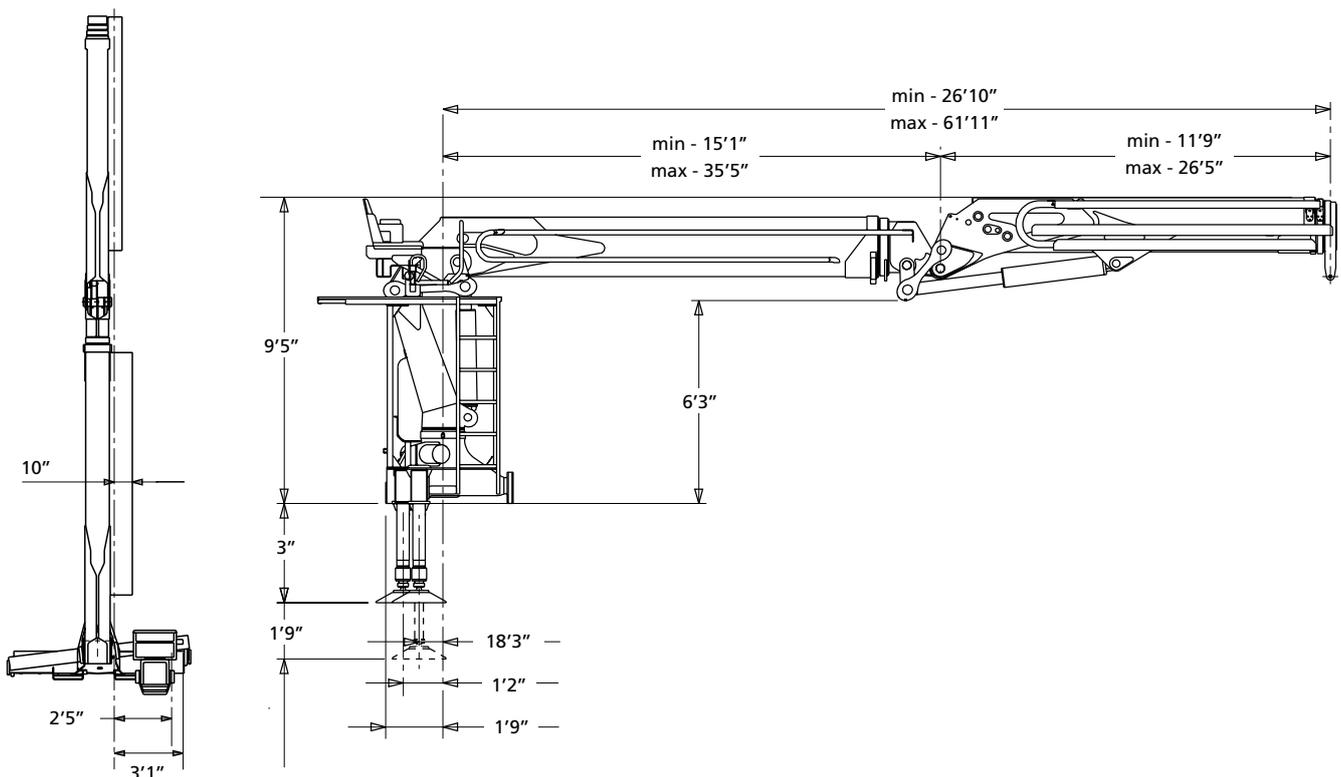

# F390SE.24

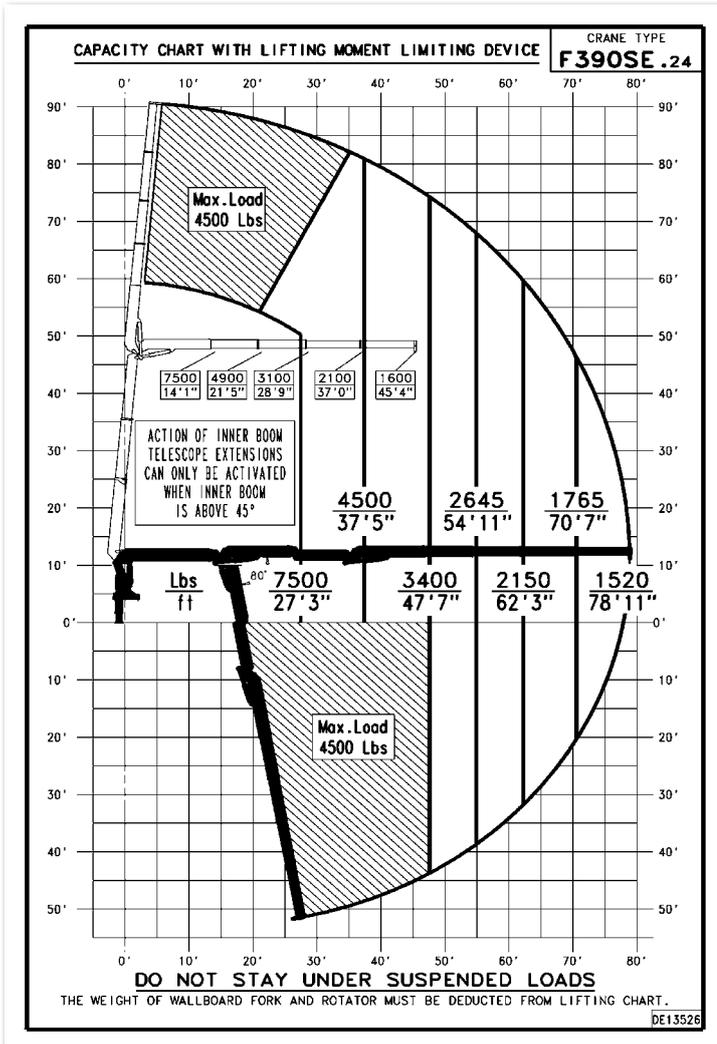

TECHNICAL DATA	F390SE.24
Lifting capacity	202524 lbs.ft
Standard reach	78'10" ft
Hydraulic extension	51'5" ft
Rotation arc	430°
Rotation torque	49112 lbs.ft
Working pressure	4206 psi
Pump capacity	16+16 gal/min
Oil tank capacity	66 gal
Outriggers spread crane	23'6" ft
Supplementary outriggers	16'4" ft
Max Crane Angle	80°
*Weight	14835 lbs

TRUCK DATA	
SBA WB: 275"-295"	13.5k tag or pusher
SFA WB: 290" - 300"	(depending on state laws)
20k front axle	Full double frame
46k rear tandems	(RBM 3-3.2 million per rail)

<b>CERTIFIED DYNAMIC PERFORMANCE</b>	Dynamic load diagrams calculated, tested and certified to lift the loads at the declared reaches unless indicated
--------------------------------------	---

\* Ground Control Crane Weight

## technical drawings

