

Dimensions and weights

Dimensions												
	Tire size	A	B	C	D	E	F	G	H	J	K	L
Two-wheel steer	20.5 x 25	12 838 mm (505 in)	12 428 mm (489)	10 899 mm (429 in)	10 236 mm (403 in)	10 007 mm (394 in)	8138 mm (320 in)	7021 mm (276 in)	2055 mm (81 in)	25.0°	22.5°	2606 mm (103 in)
	16.0 x 25	12 838 mm (505 in)	12 428 mm (489)	10 899 mm (429 in)	10 185 mm (401 in)	9981 mm (393 in)	8138 mm (320 in)	7021 mm (276 in)	2093 mm (82 in)	26.0°	23.5°	2536 mm (100 in)
Four-wheel steer	20.5 x 25	8967 mm (329 in)	8630 mm (339)	6732 mm (265 in)	6061 mm (239 in)	5832 mm (230 in)	4000 mm (157 in)	3498 mm (137 in)	2055 mm (81 in)	25.0°	22.5°	2606 mm (103 in)
	16.0 x 25	8967 mm (329 in)	8630 mm (339)	6732 mm (265 in)	6010 mm (237 in)	5806 mm (229 in)	4000 mm (157 in)	3498 mm (137 in)	2093 mm (82 in)	26.0°	23.5°	2536 mm (100 in)


Notes: (All dimensions are in mm)

1. All dimensions are for reference only

2. Boom elevation is -3° to +76°

3. Dimensions shown are based on 20.5 x 25 tires.

Add 34,5 mm for 16.0 x 25 tires.

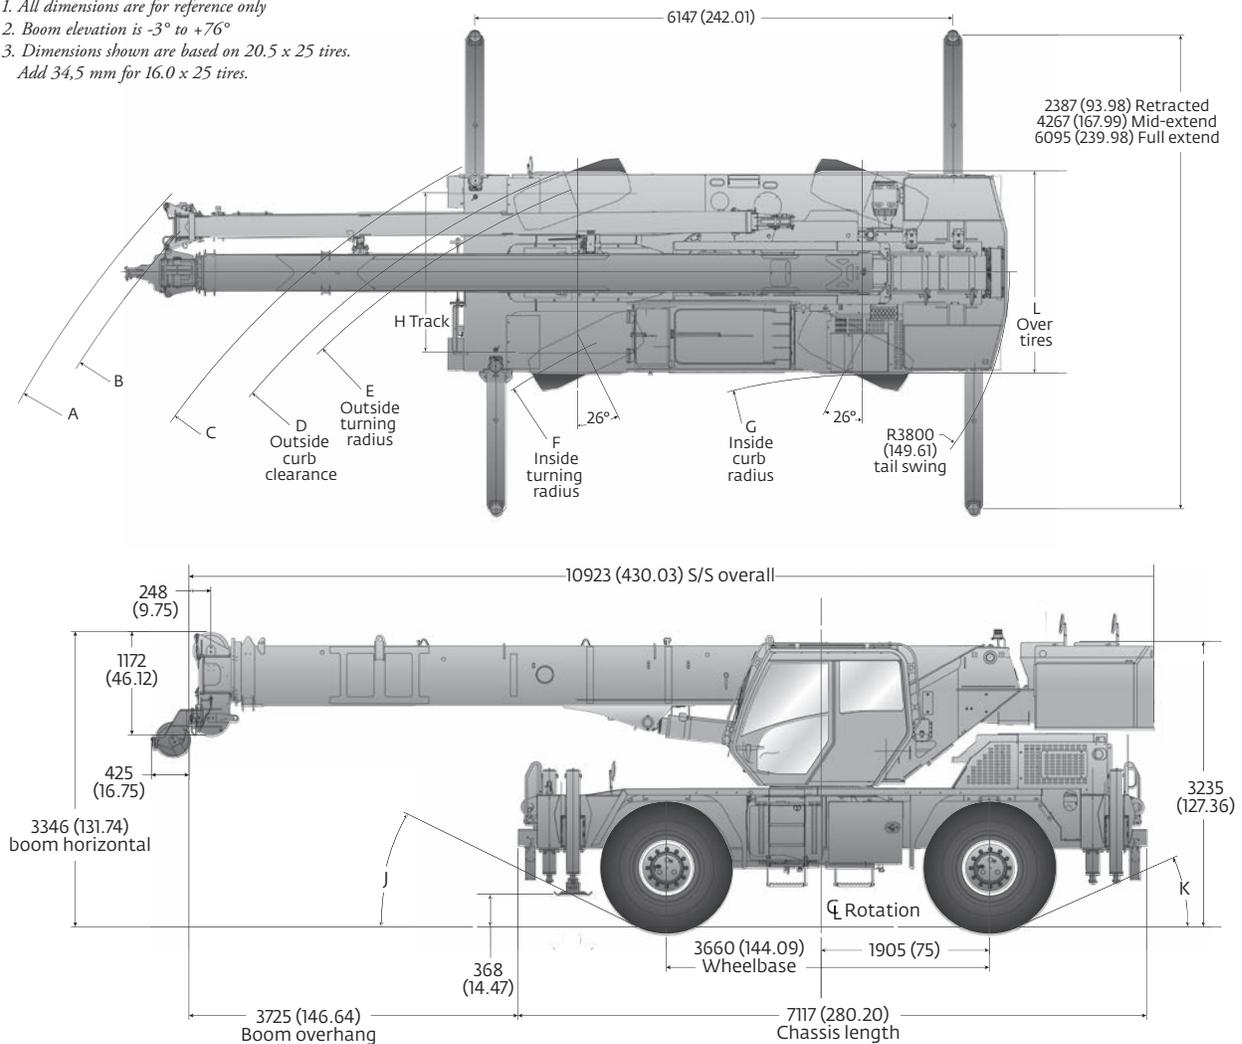

Weights

	Gross		Front		Rear	
	kg	lb	kg	lb	kg	lb
Basic Machine: including 31 m (95 ft) main boom, main hoist with 137 m (450 ft) of rope, full counterweight + IPO, 6.8 t (7.5 USt) headache ball, and 27 t (30 USt) hook block Tier 4F engine.	26 419	58,244	11 590	25,551	14 830	32,693
Add: Auxiliary hoist + 137 m (450 ft) of 35 x 7 hoist cable and auxiliary boom nose ILO IPO counterweight	26 646	58,744	11 654	25,693	14,992	33,051
Add: 7.9 m - 13.7 m (26 ft - 45 ft) telescopic boom extension + extension hangers	27 556	60,750	13 021	28,706	14 535	32,044