



Dimensions

Transport dimensions and weights


Weight: approx. 90,9 t = 200,435 lb (two winches, with 15 m bi-fold jib, 50 t hook block, with 6 t carbody counterweight, with 28,3 t counterweight)

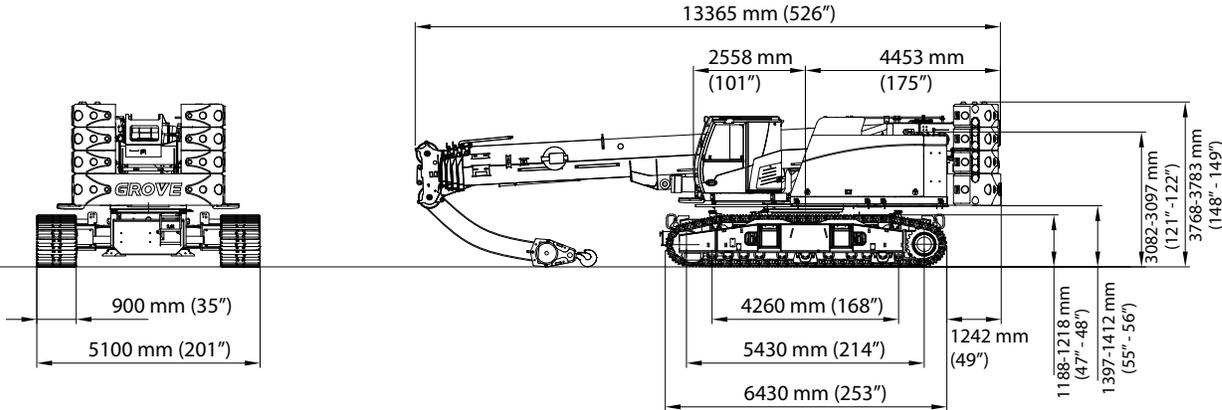

Weight: approx. 36,2 t = 79,780 lb (two winches, with 15 m bi-fold jib, 50t hook block, with walkway)

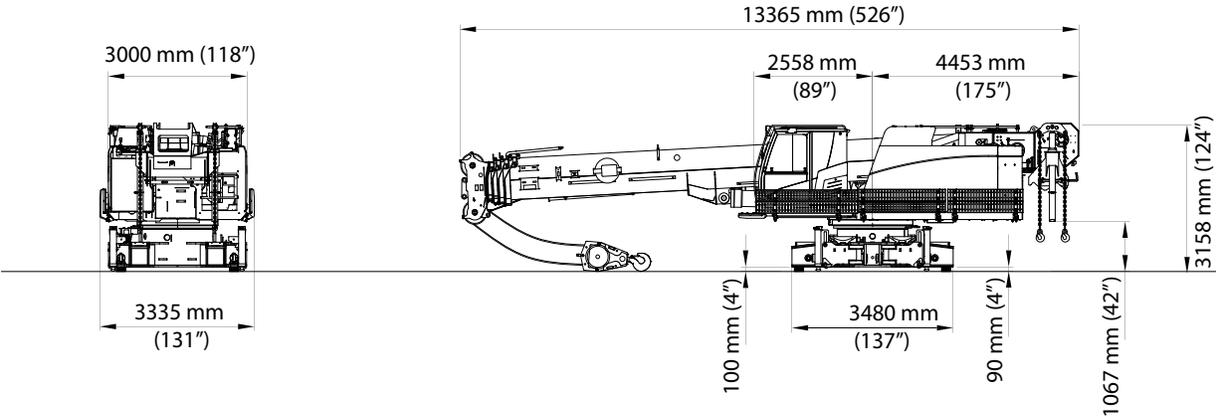

Weight: approx. 55,9t = 123,167 lb (two winches, with 15 m bi-fold jib, 50 t hook block, with walkway)

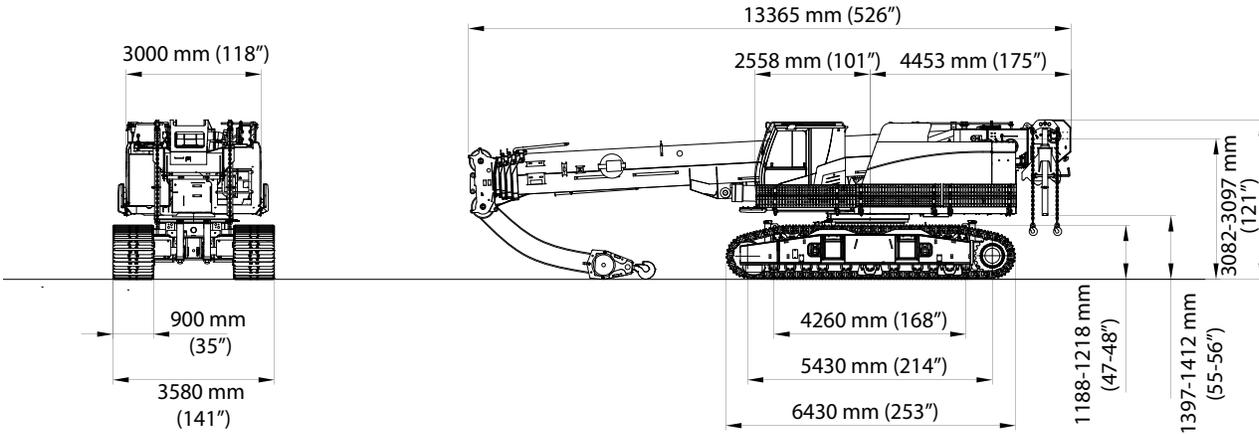

Dimensions

Transport dimensions and weights

	Carbody counterweight x 2	3000 kg (6,614 lb)
	Crawler x 2	9 840 kg (21,693 lb) triple-bar 10 800 kg (23,810 lb) flat tracks
	Base plate for counterweight x 1	14 900 kg (32,849 lb)
	Counterweight x 4	2 250 kg (4,960 lb)
	Fly jib - 8 m (26.3 ft)	920 kg (2,028 lb)
	Fly jib extension - 7 m (23 ft)	300 kg (661 lb)
	Auxiliary jib	160 kg (353 lb)
	Heavy duty jib	700 kg (1,543 lb)