



# Dimensions

## Transport dimensions and weights


Weight: approx. 42,5 t = 93 700 lbs (two winches, with 15 m bi-fold jib, 63 t hook block, with walkway)

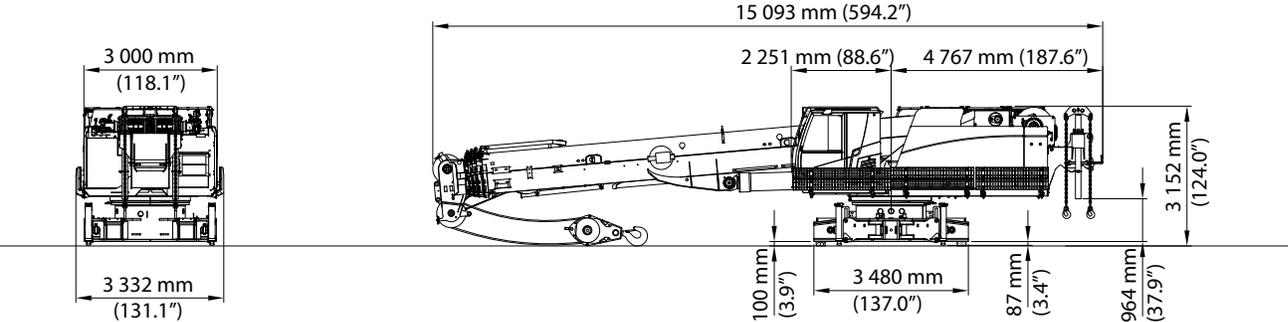

Weight: approx. 61,9 t = 136 500 lbs (two winches, with 15 m bi-fold jib, 63 t hook block, with walkway)

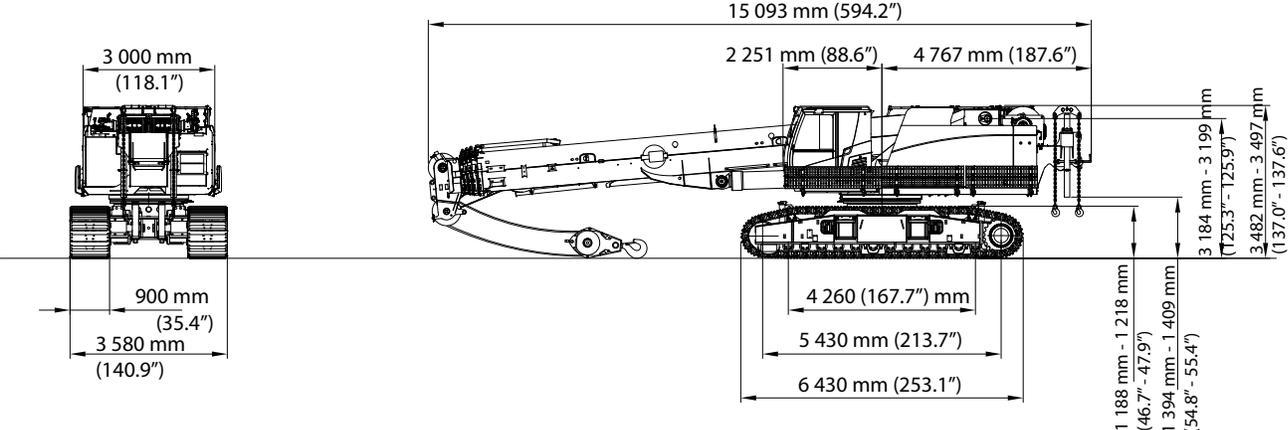


Weight: approx. 107,6 t = 237 200 lbs (two winches, with 15 m bi-fold jib, 63 t hook block, with 17 t carbody counterweight, with 28.3 t counterweight)

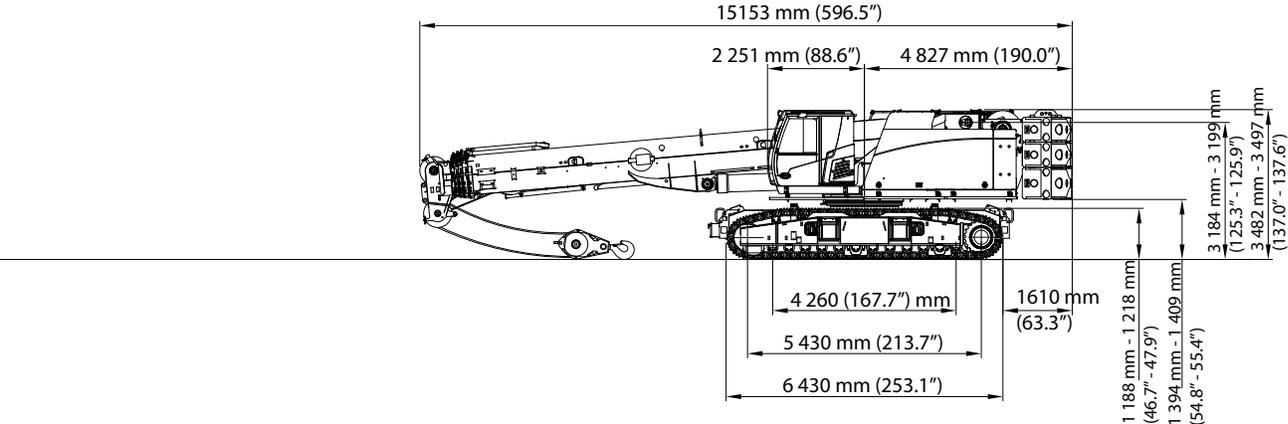


# Dimensions

## Transport dimensions and weights




Carbody counterweight x 2

8 500 kg  
(18,739 lb) each

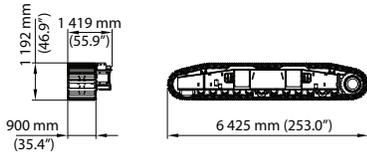


Crawler x 2

9 790 kg (21,583 lb) triple-bar  
10 660 kg (23,501 lb) flat tracks  
10 140 kg (22,355 lb) triple-bar  
11 090 kg (24,449 lb) flat tracks




Base plate for counterweight x 1

14 150 kg  
(31,195 lb)




Counterweight x 4

3 500 kg  
(7,716 lb)




Fly jib - 8 m (26.3 ft)

920 kg  
(2,028 lb)



Fly jib extension - 7 m (23 ft)

300 kg  
(661 lb)



Auxiliary jib

160 kg  
(353 lb)



Heavy duty jib

700 kg  
(1,543 lb)