

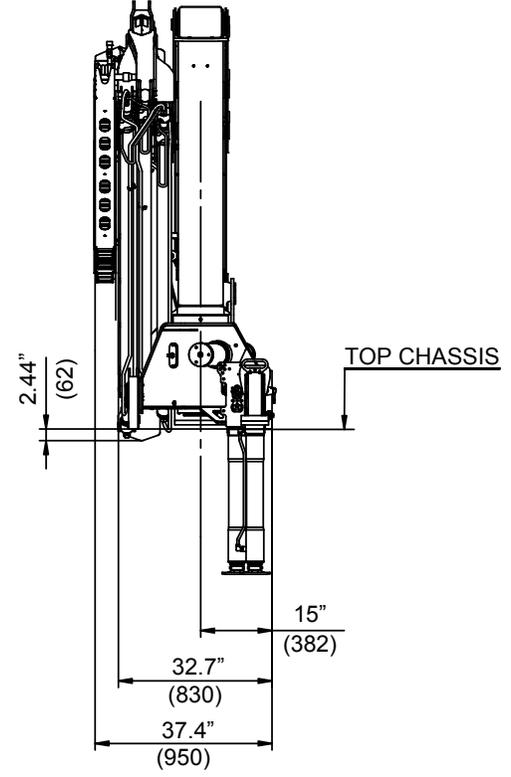
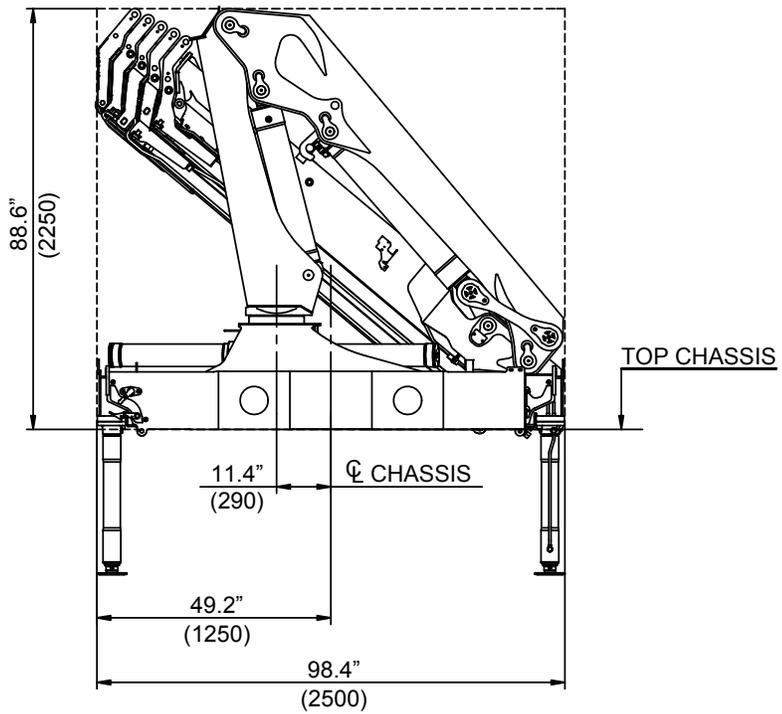



# Dimension Sketch

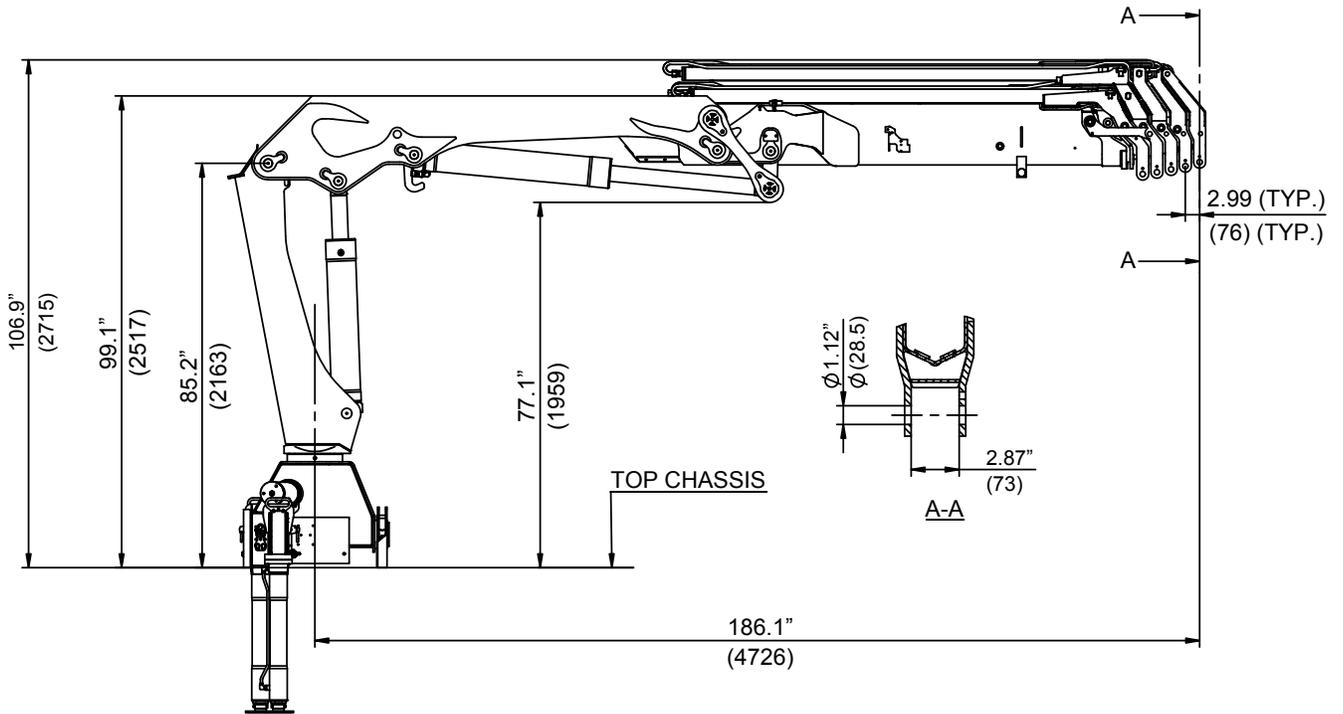


# Slewing Radius

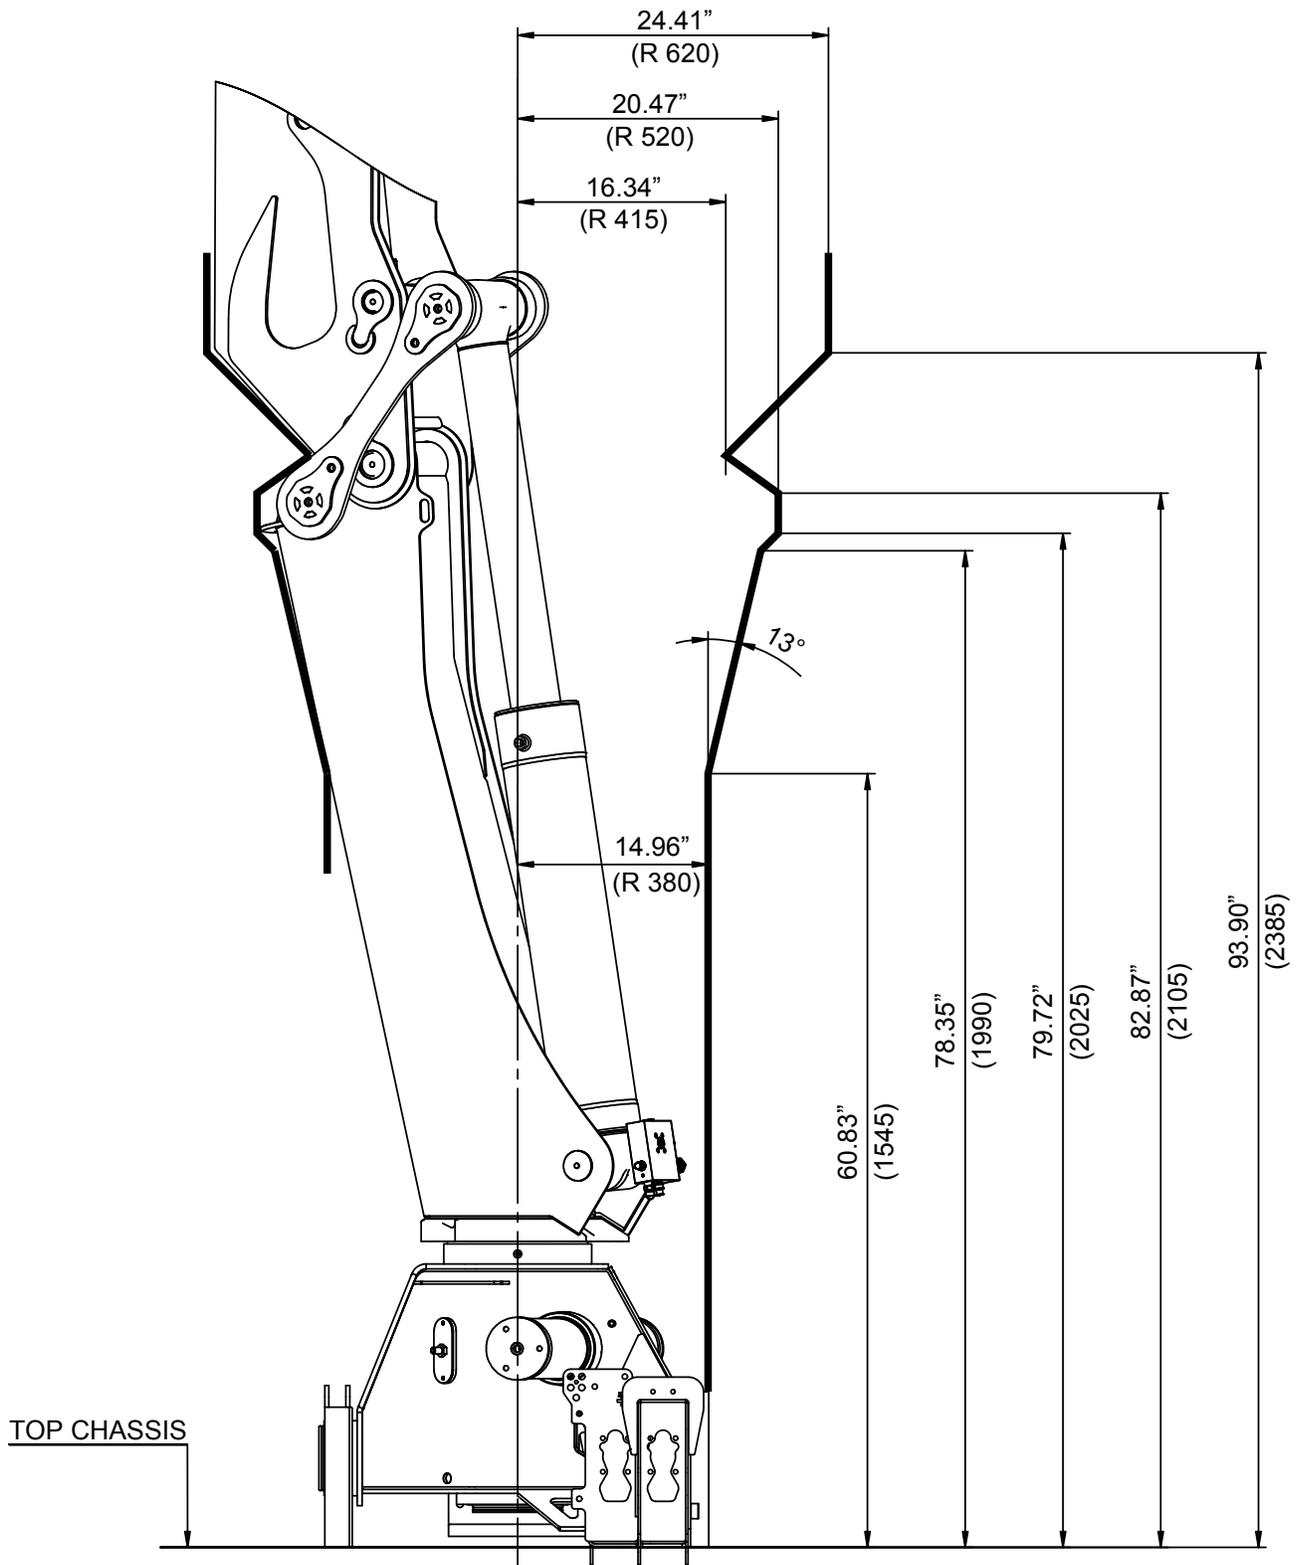



# Lifting Height at Column

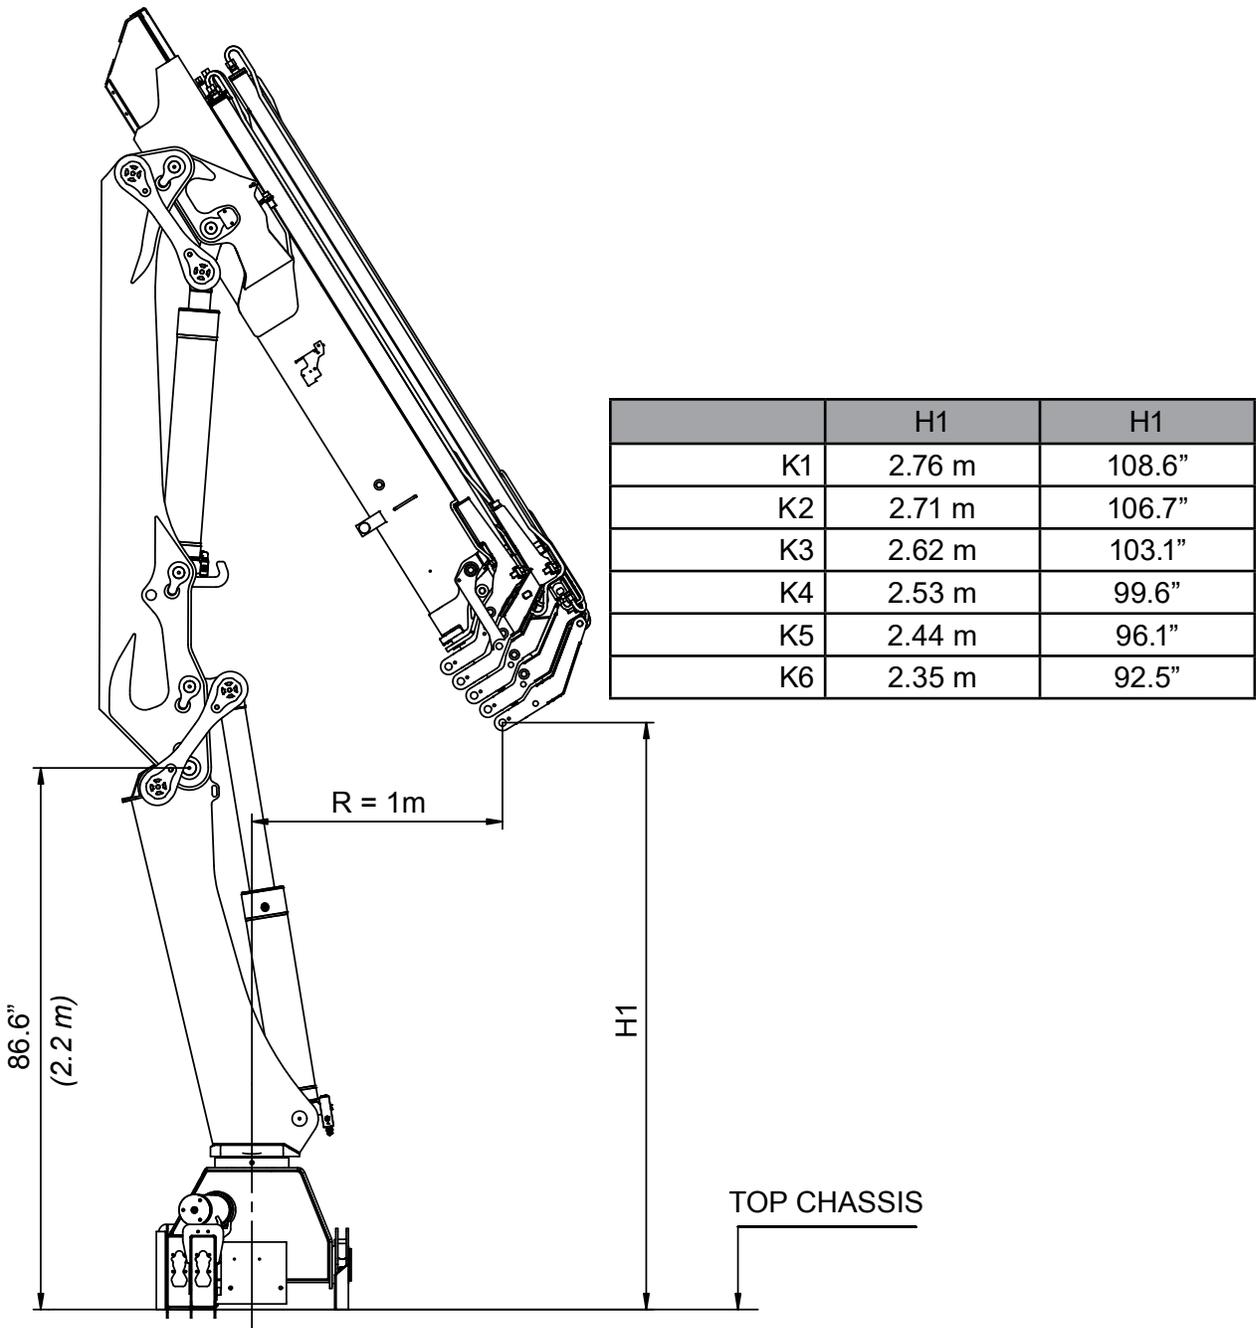



### Dimension Sketch, Internal Hose Routing

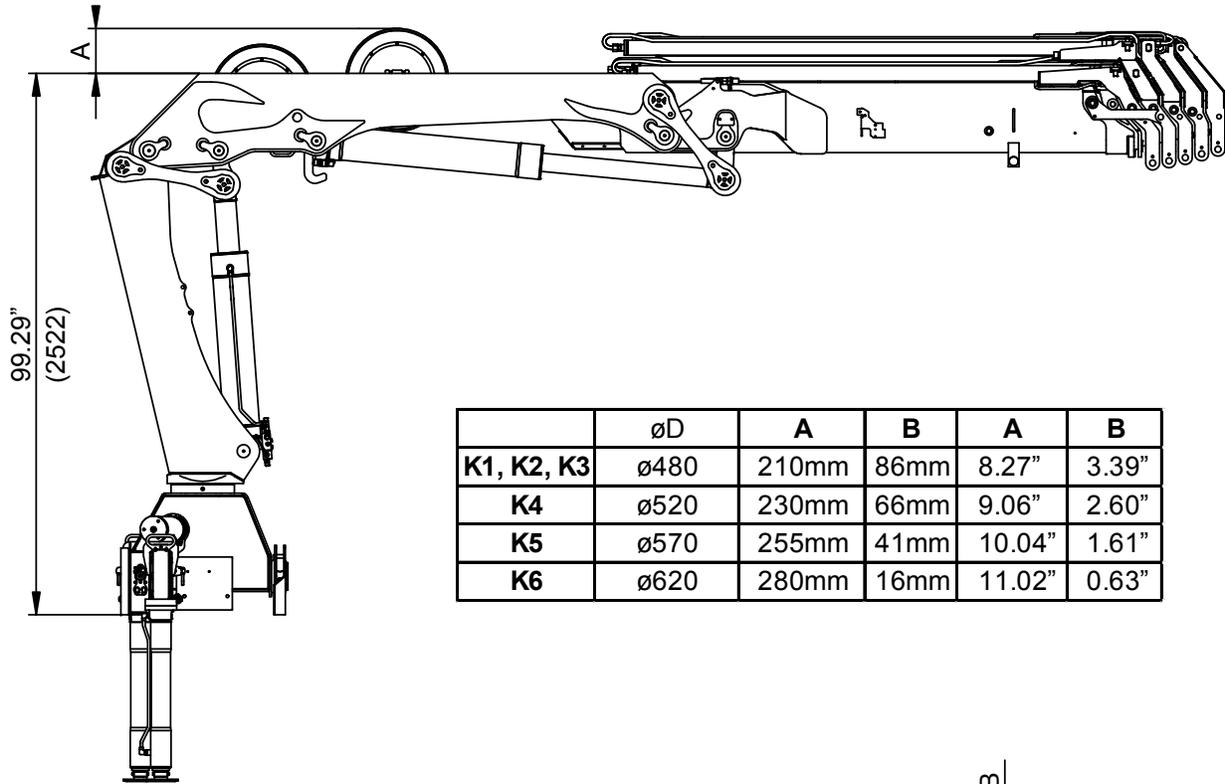


	øD	A	B	A	B
<b>K1, K2, K3</b>	ø480	210mm	86mm	8.27"	3.39"
<b>K4</b>	ø520	230mm	66mm	9.06"	2.60"
<b>K5</b>	ø570	255mm	41mm	10.04"	1.61"
<b>K6</b>	ø620	280mm	16mm	11.02"	0.63"

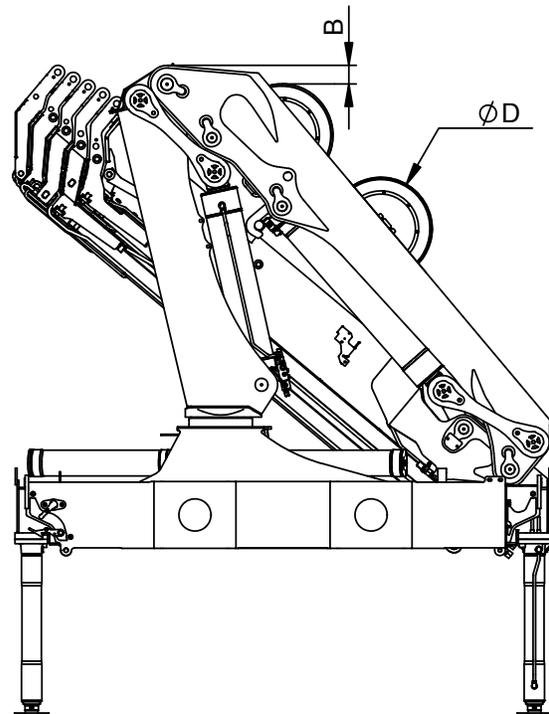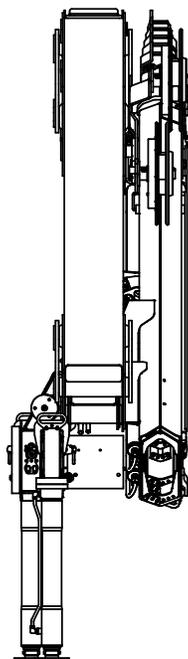

# Stowed in Truck Body

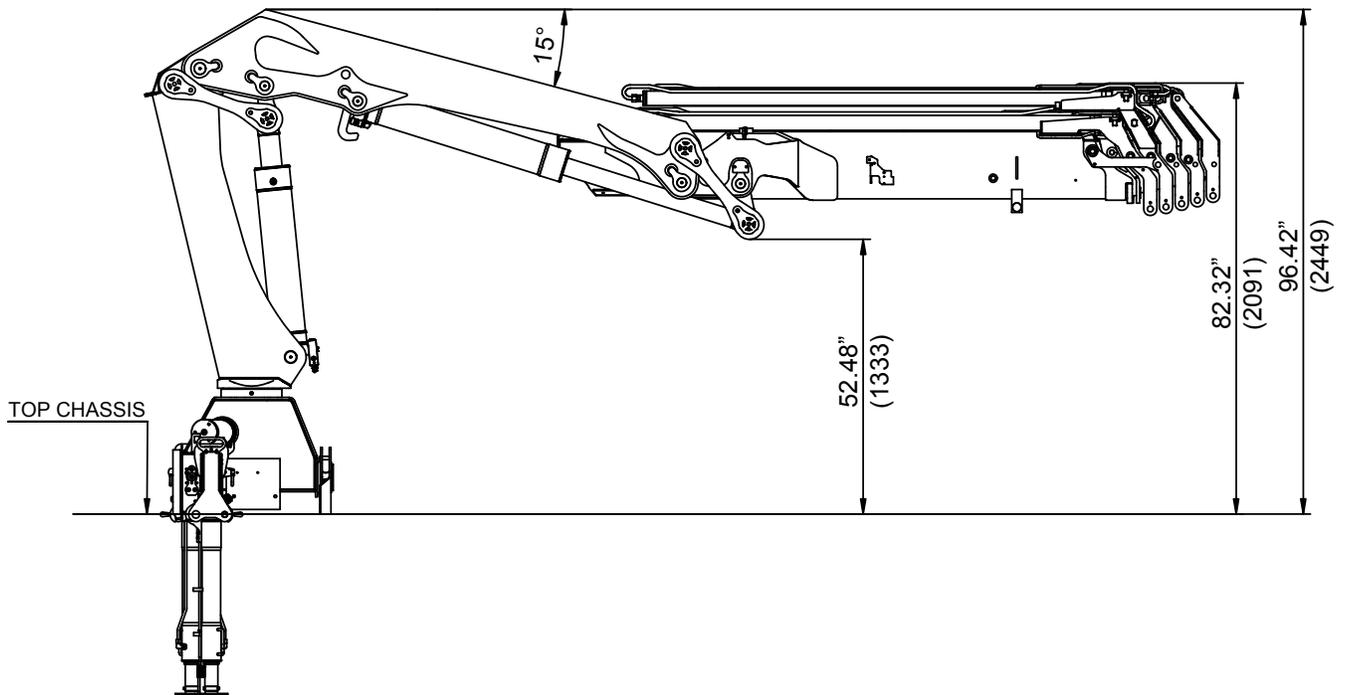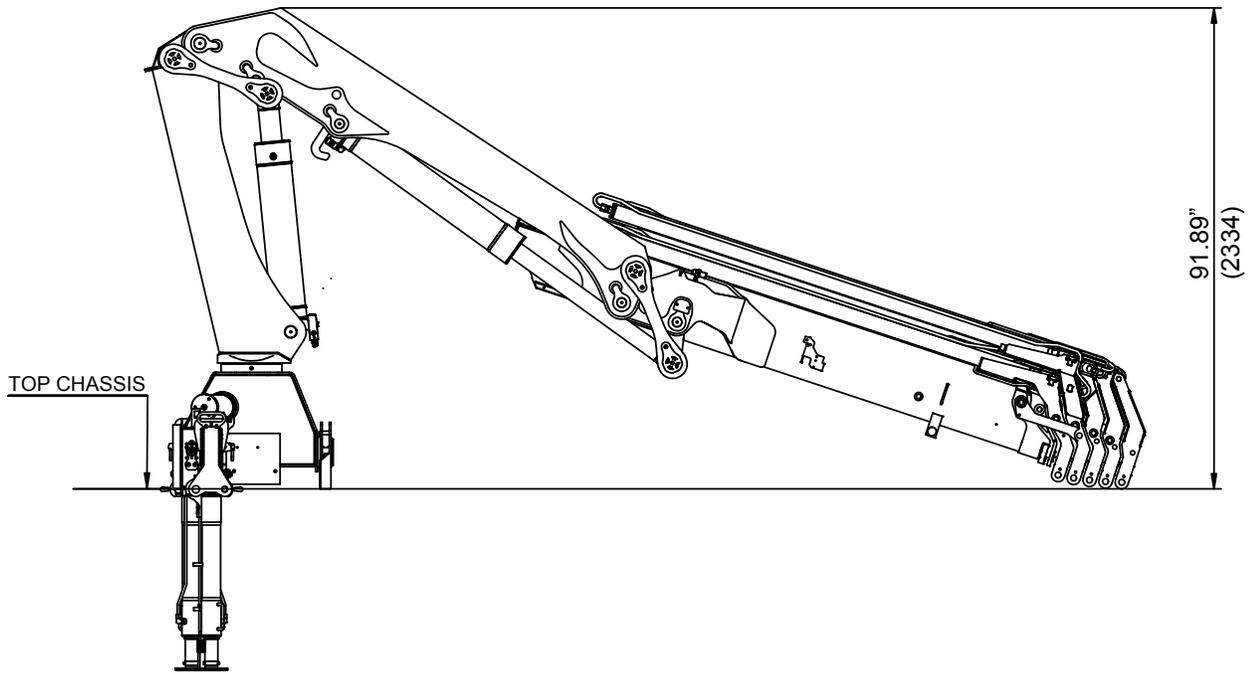

# Centers of Gravity

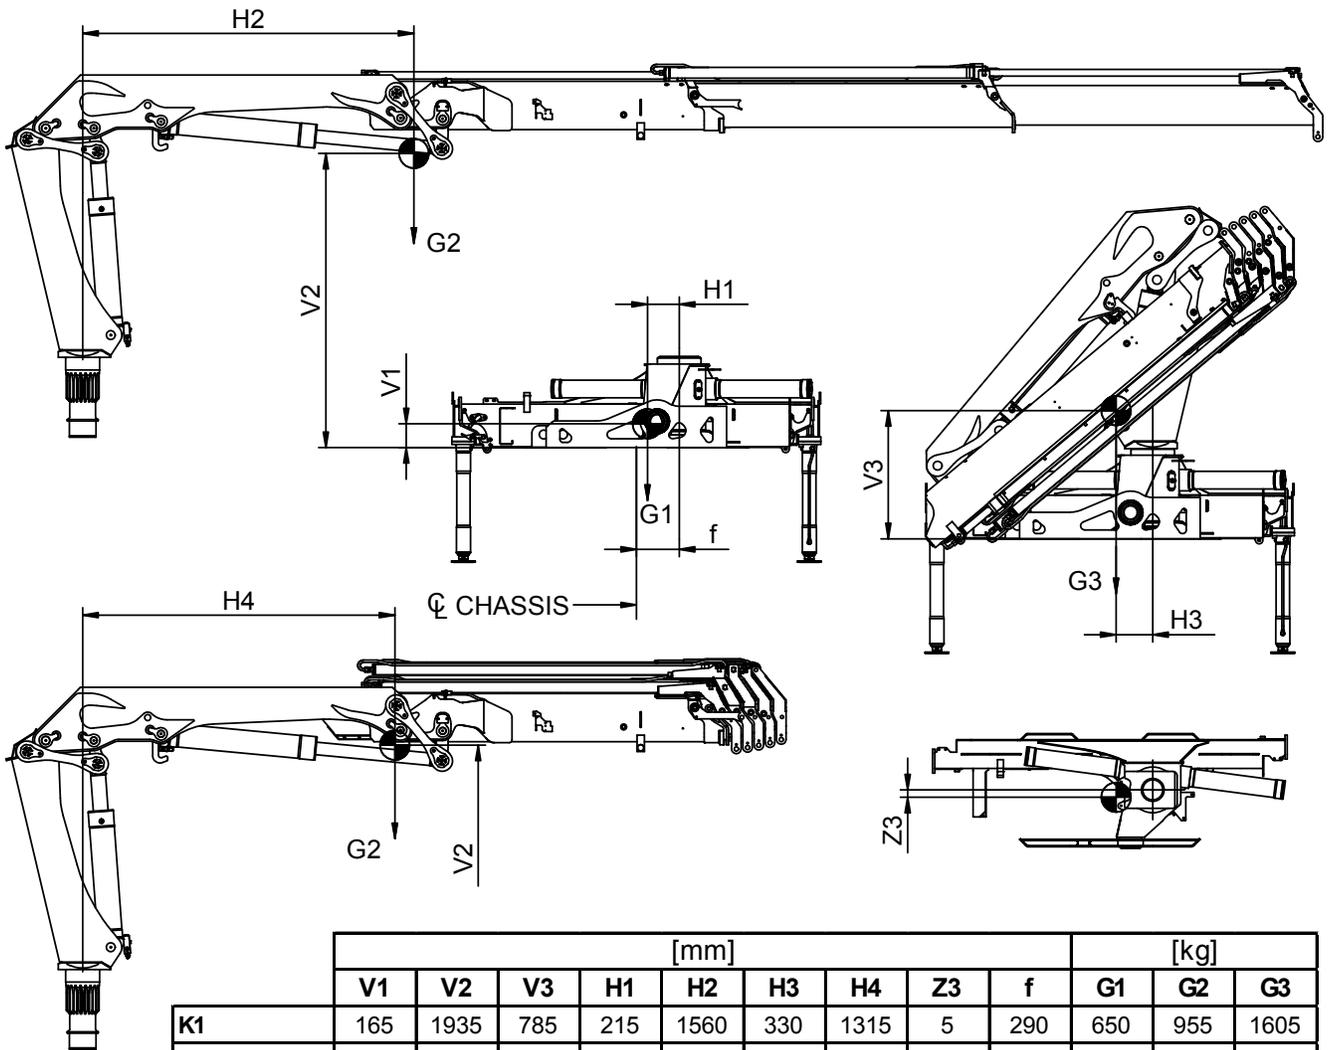

	[mm]									[kg]		
	V1	V2	V3	H1	H2	H3	H4	Z3	f	G1	G2	G3
<b>K1</b>	165	1935	785	215	1560	330	1315	5	290	650	955	1605
<b>K2</b>	165	1995	800	215	2245	325	1560	10	290	650	1100	1750
<b>K3</b>	165	2040	820	215	2980	315	1750	25	290	650	1240	1890
<b>K4</b>	165	2070	835	215	3755	305	1900	40	290	650	1370	2020
<b>K5</b>	165	2095	850	215	4495	300	2020	55	290	650	1480	2130
<b>K6</b>	165	2115	860	215	5130	280	2105	60	290	650	1585	2235

	[in]									[lbs]		
	V1	V2	V3	H1	H2	H3	H4	Z3	f	G1	G2	G3
<b>K1</b>	6.50	76.18	30.91	8.46	61.42	12.99	51.77	0.20	11.42	1433	2105	3538
<b>K2</b>	6.50	78.54	31.50	8.46	88.39	12.80	61.42	0.39	11.42	1433	2425	3858
<b>K3</b>	6.50	80.31	32.28	8.46	117.32	12.40	68.90	0.98	11.42	1433	2734	4167
<b>K4</b>	6.50	81.50	32.87	8.46	147.83	12.01	74.80	1.57	11.42	1433	3020	4453
<b>K5</b>	6.50	82.48	33.46	8.46	176.97	11.81	79.53	2.17	11.42	1433	3263	4696
<b>K6</b>	6.50	83.27	33.86	8.46	201.97	11.02	82.87	2.36	11.42	1433	3494	4927