



Slewing Radius

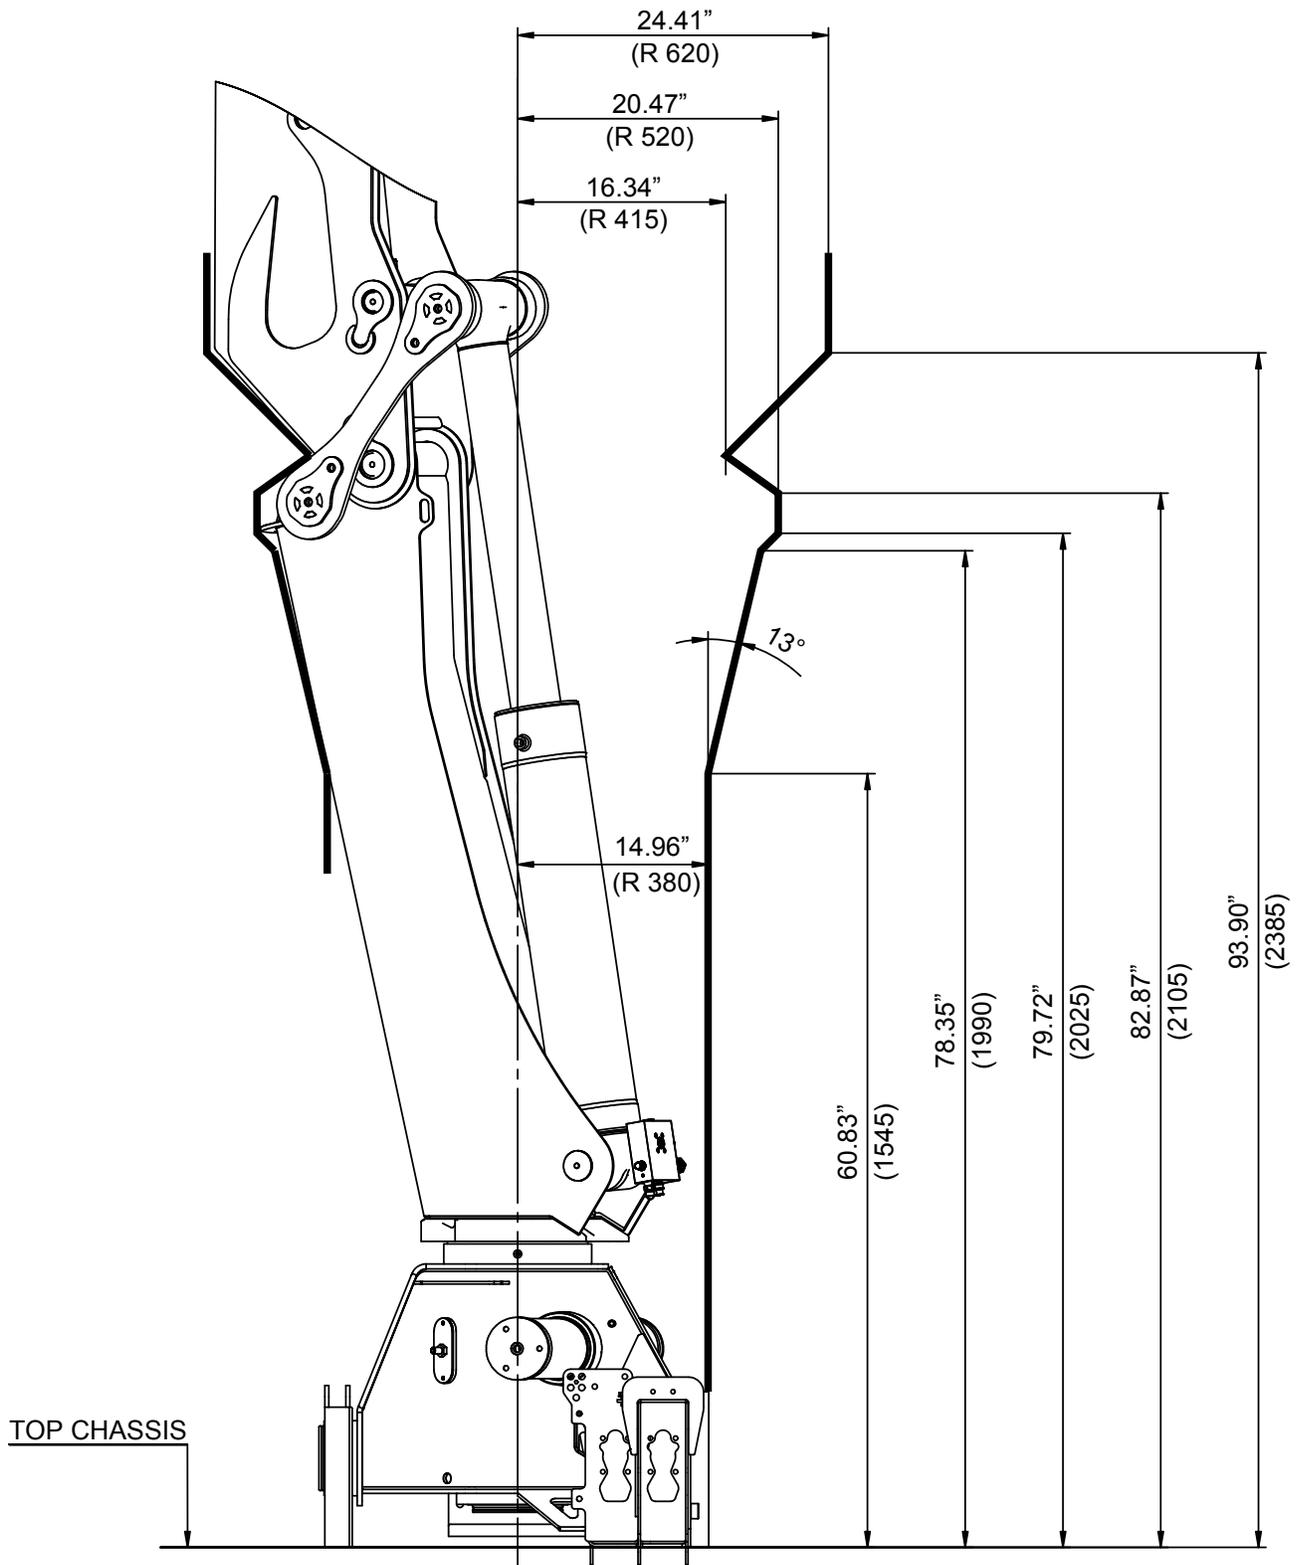


Dimension Sketch for Truck-Mounted Loader


MOUNTING KIT 8 x M24 x 2 BOLTS

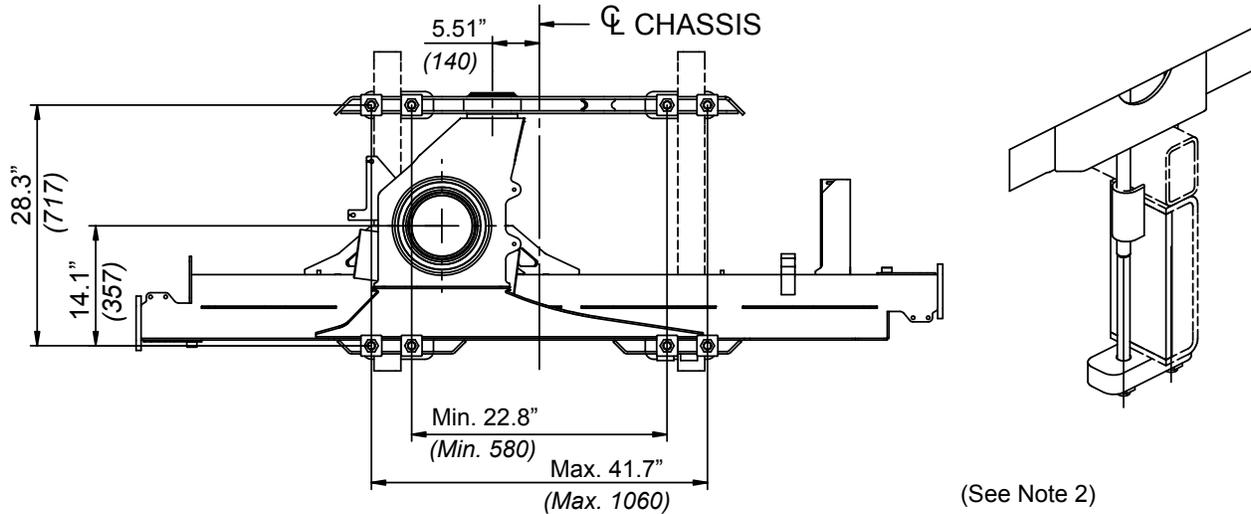


- Notes:
1. Values dictated by strength considerations.
 2. Drill hole when assembling.
 3. For installation, please see IMT Installation Manual.
 4. For mounting kits or spare parts, please see the Spart Parts Catalog.

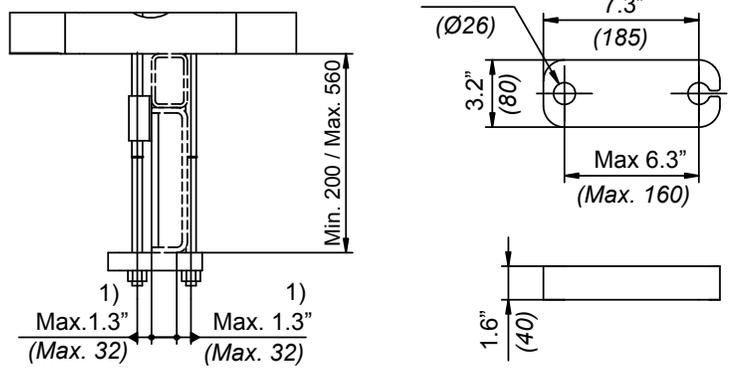


MOUNTING KIT 4 x M30 x 2 BOLTS

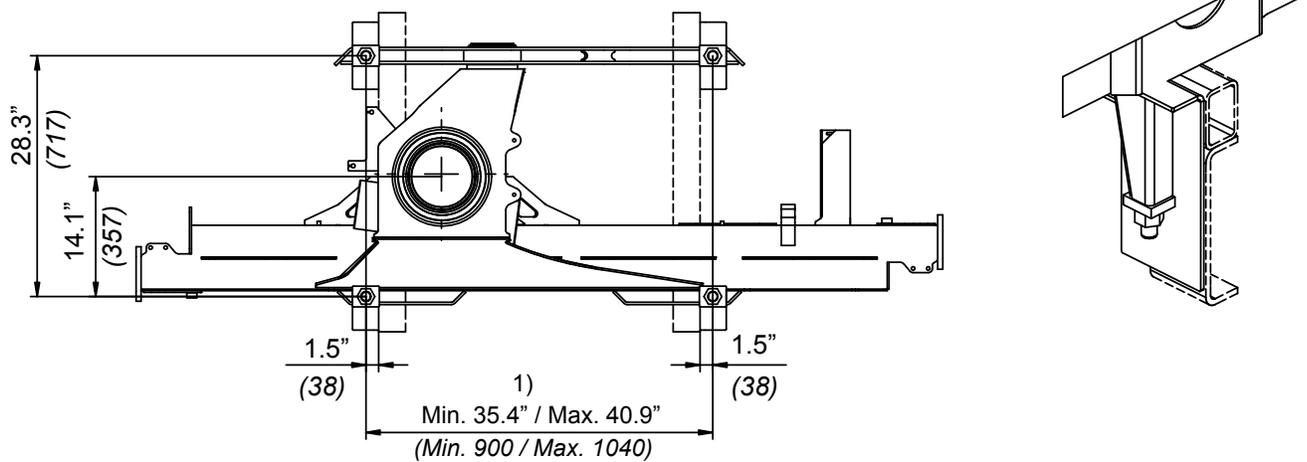

Lifting Height at Column

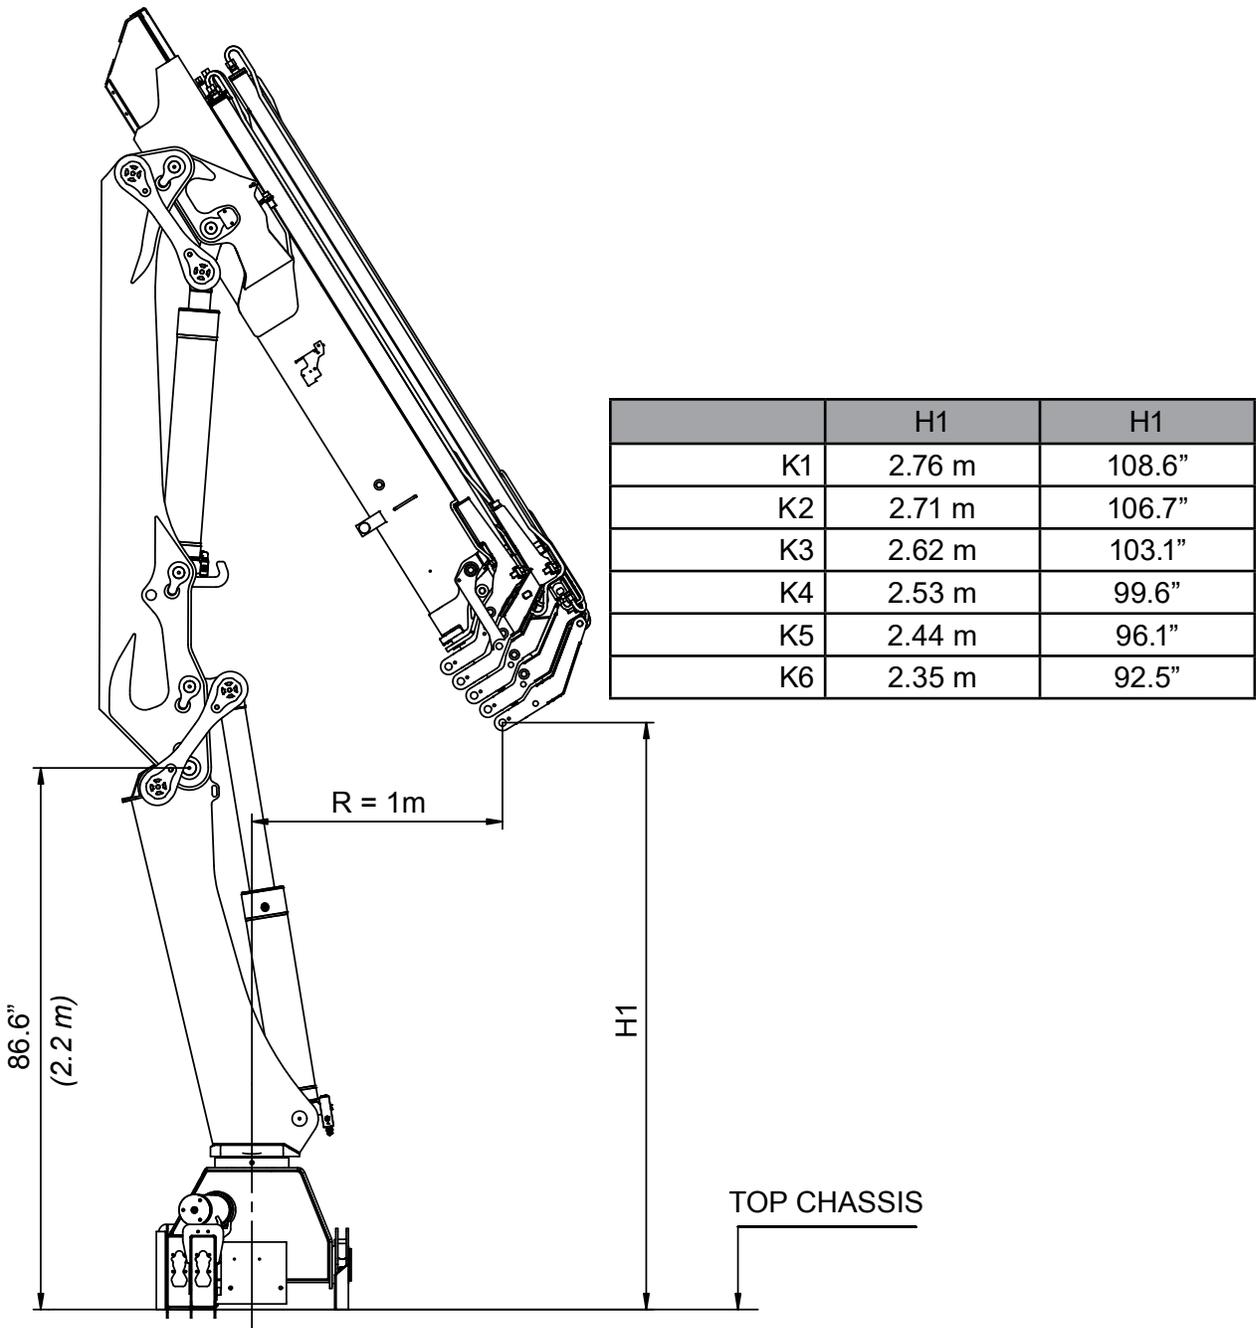


Dimension Sketch, Fixed Stabilizer Legs

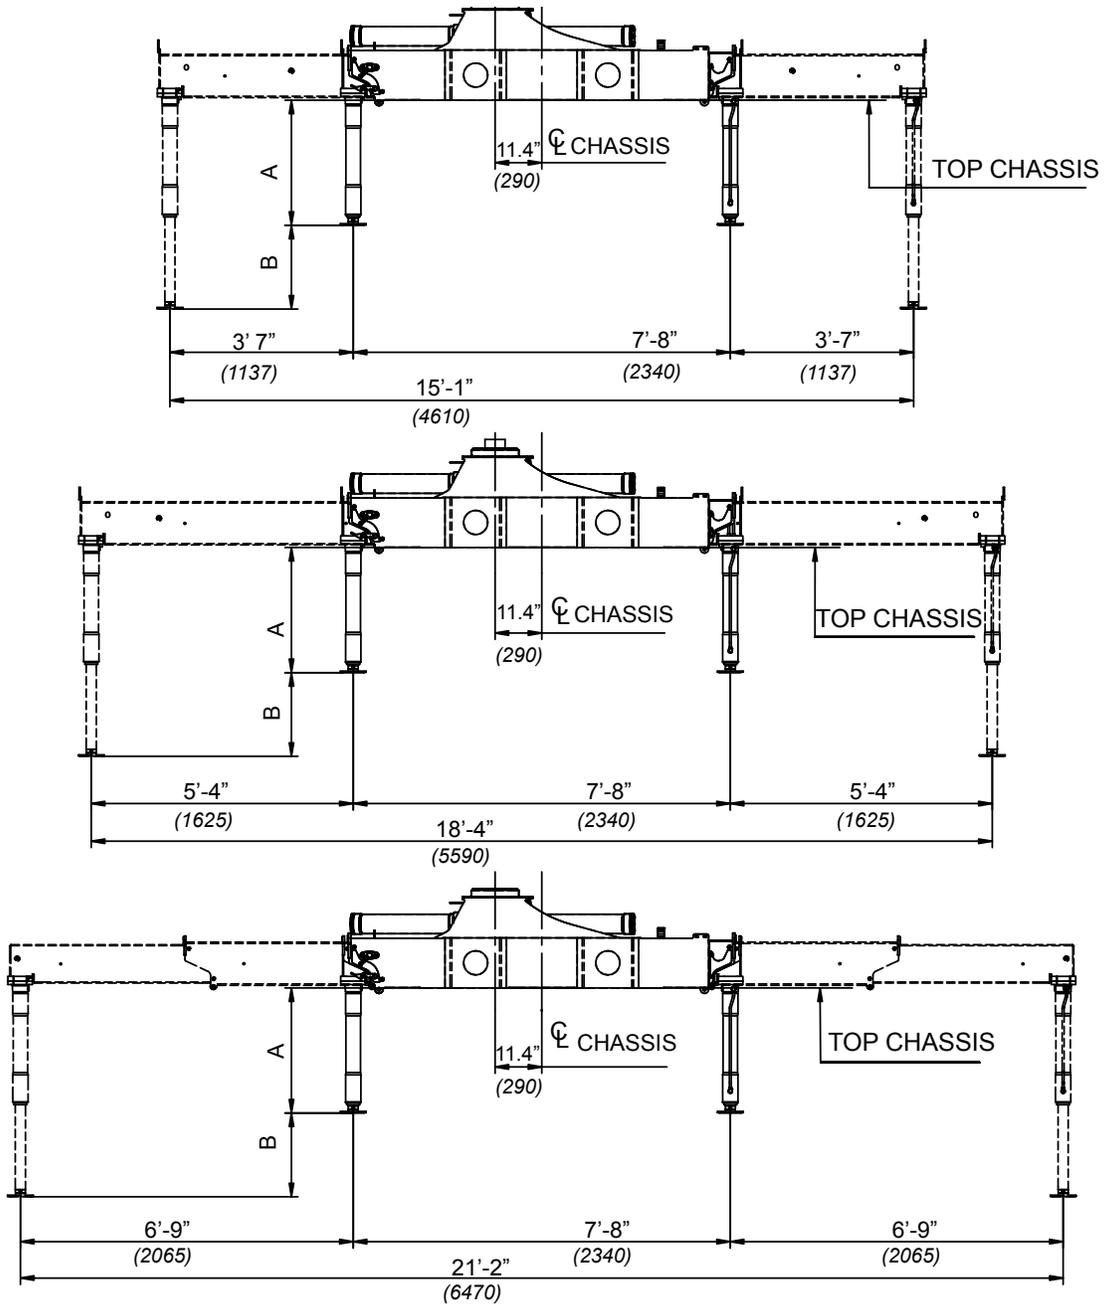


B			
22.8"	A	27.8"	30.4"
26.8"	A	31.7"	34.3"

B			
22.8"	A	30.4"	32.9"
26.8"	A	34.4"	36.8"

CONTINUED

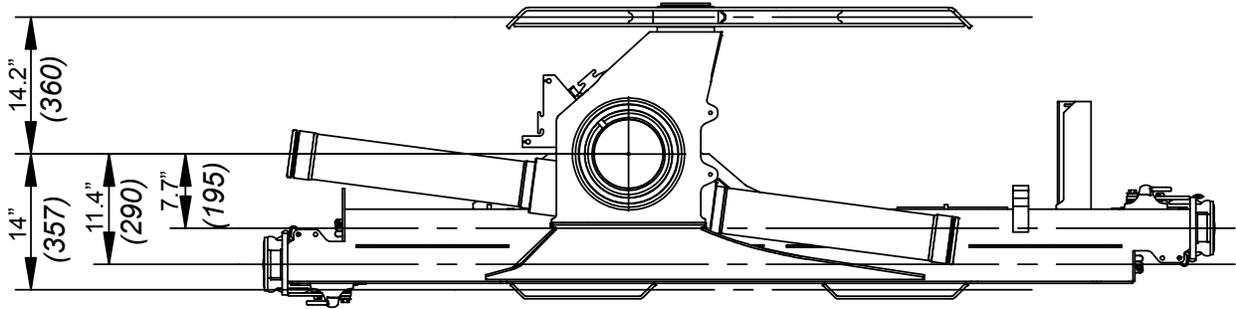


Dimension sketch, swing-up stabilizer legs 30° - 60° (manual)

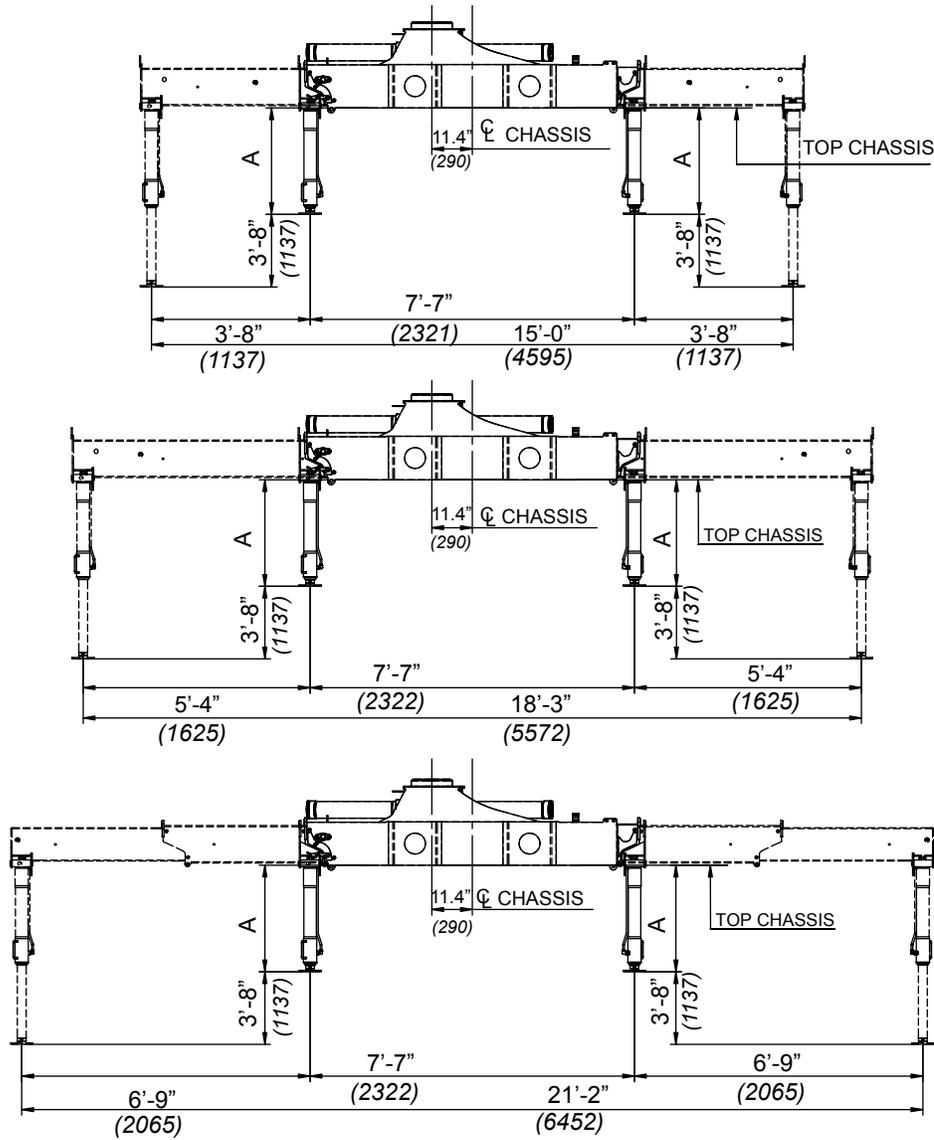




			
A Type R-60°	30.4"	34.3"	38.2"
A Type R-20° (Obsolete)	30.0"	34.0"	38.0"
A Type R-60°	771mm	871mm	971mm
A Type R-20° (Obsolete)	763mm	863mm	963mm

CONTINUED

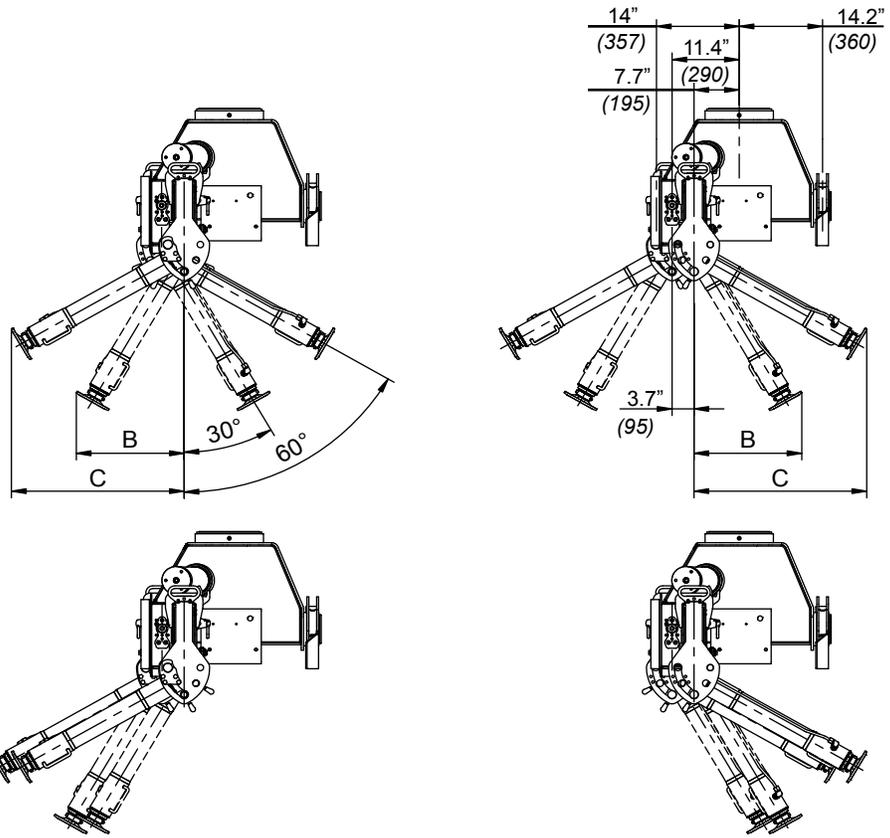


B	465mm	515mm	565mm	18.3"	20.3"	22.2"
C	744mm	831mm	918mm	29.3"	32.8"	36.1"

Dimension sketch, swing-up stabilizer legs 180° (manual + hydraulic)

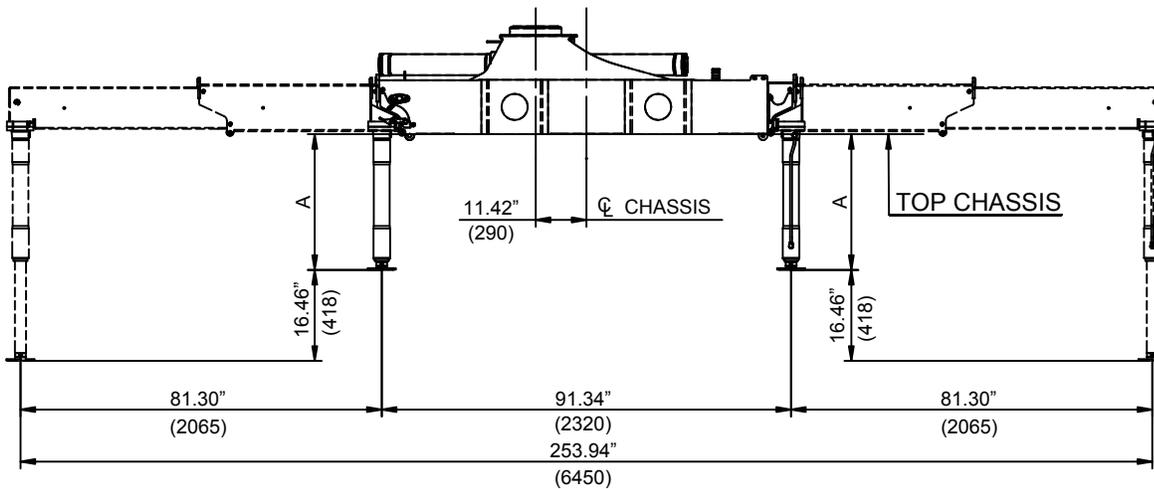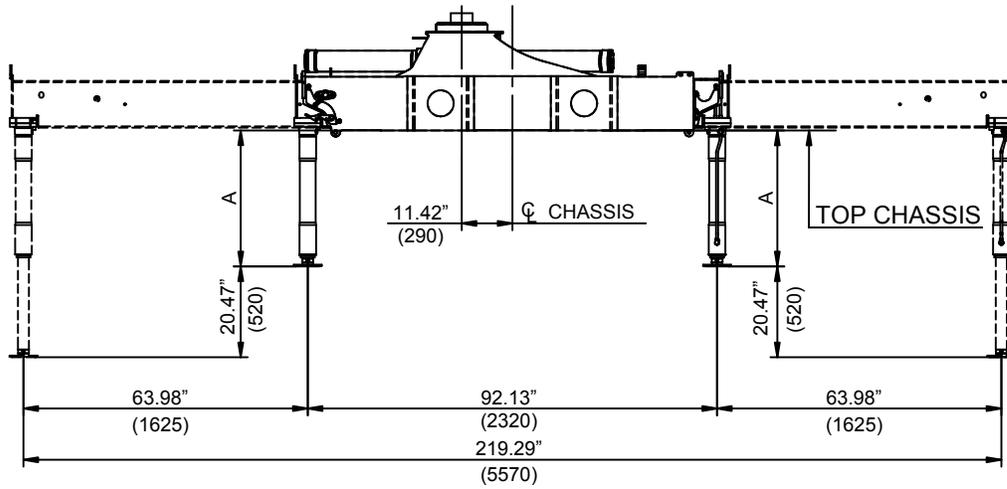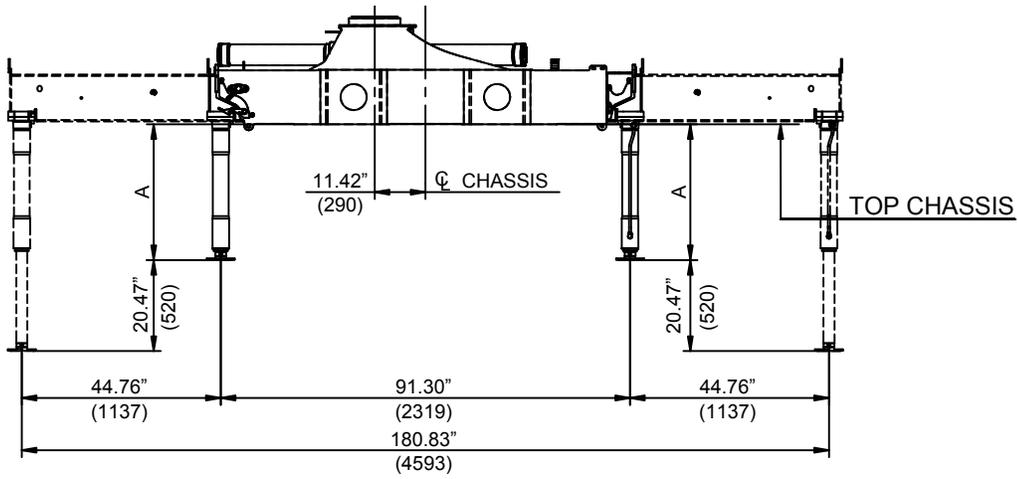


			
A	881	981	1081
A	34.69"	38.62"	42.56"


CONTINUED

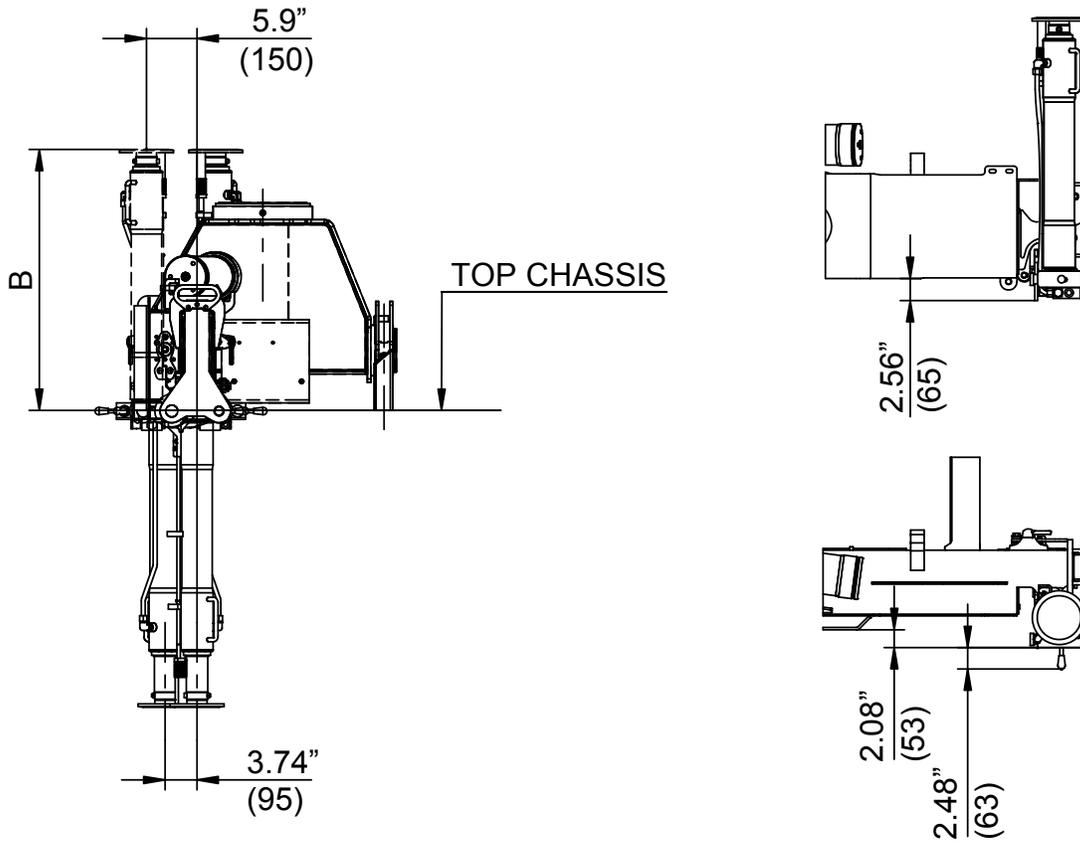



B	775mm	875mm	975mm
B	30.51"	34.45"	38.39"

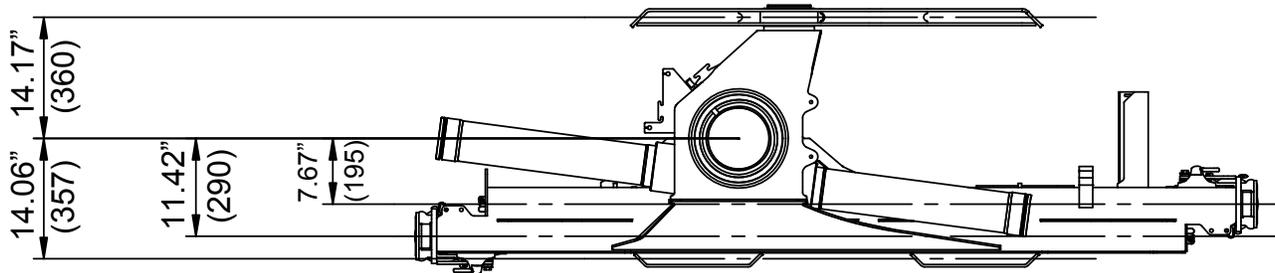



Dimension Sketch, Internal Hose Routing

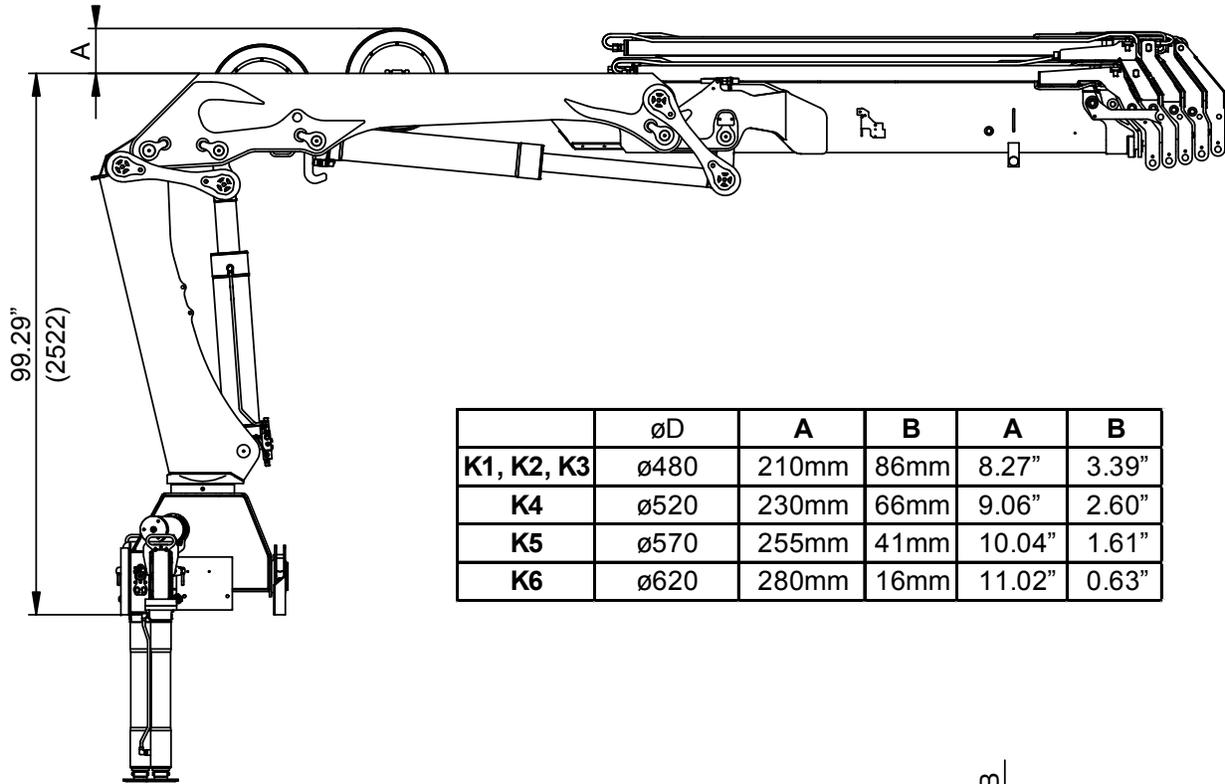

	øD	A	B	A	B
K1, K2, K3	ø480	210mm	86mm	8.27"	3.39"
K4	ø520	230mm	66mm	9.06"	2.60"
K5	ø570	255mm	41mm	10.04"	1.61"
K6	ø620	280mm	16mm	11.02"	0.63"


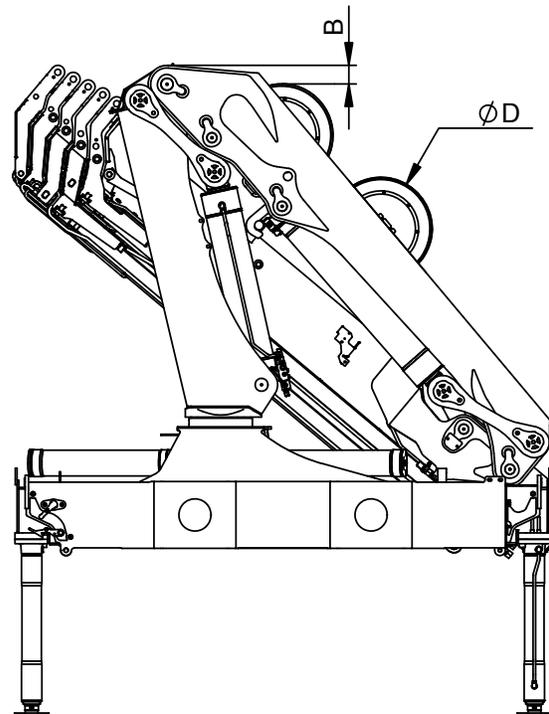
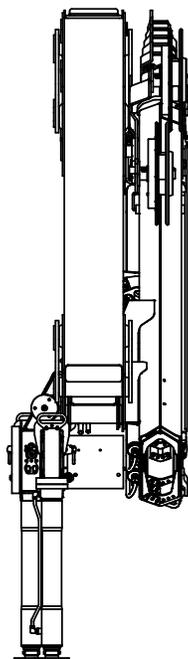


Stowed in Truck Body

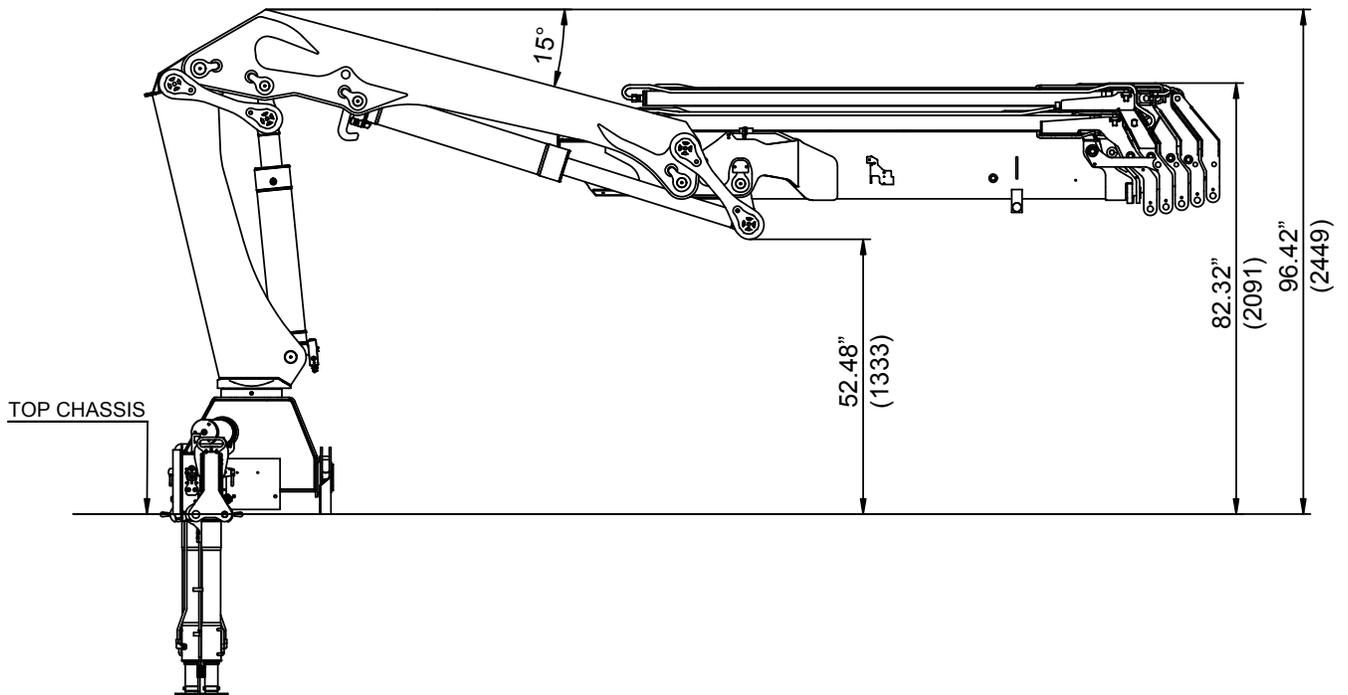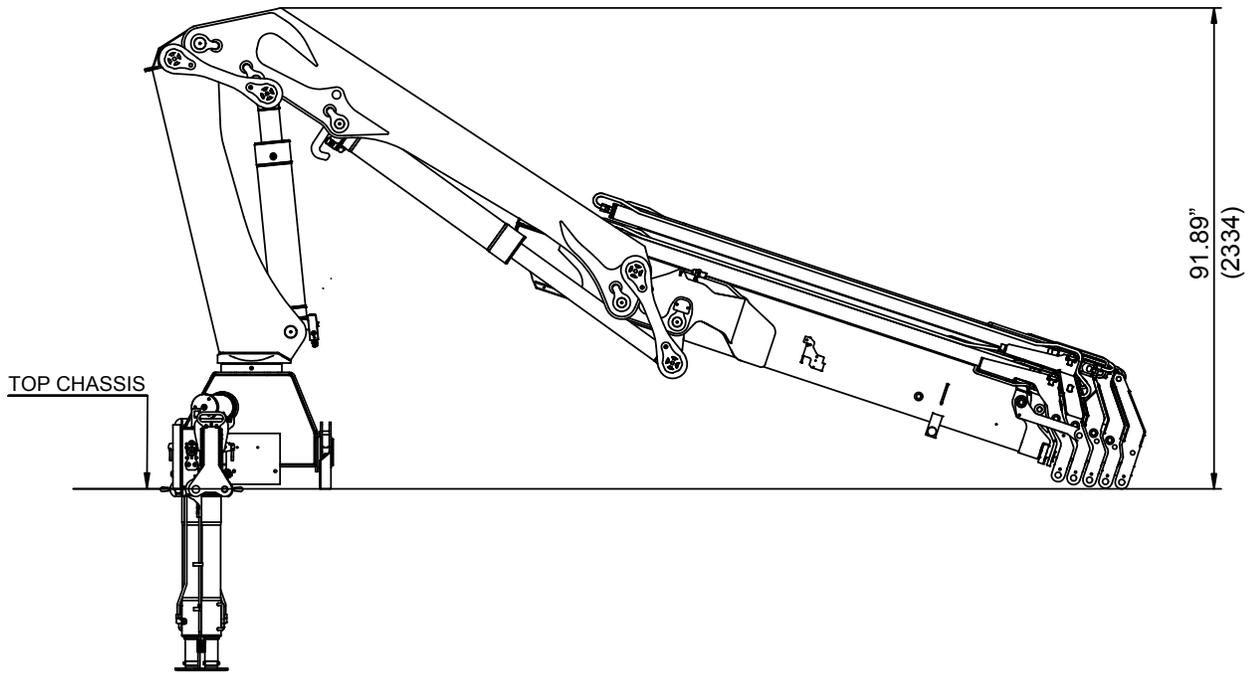


Dimension Sketch for Connecting Link

The connection link must be able to move freely at an angle of 35° (minimum) in both directions in relation to the longitudinal direction of the jib extension. This is to minimize the risk of damage to the hook suspension when placing crane equipment in the truck body.

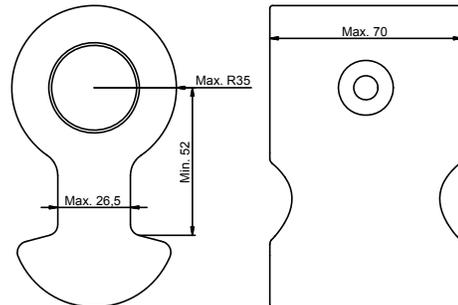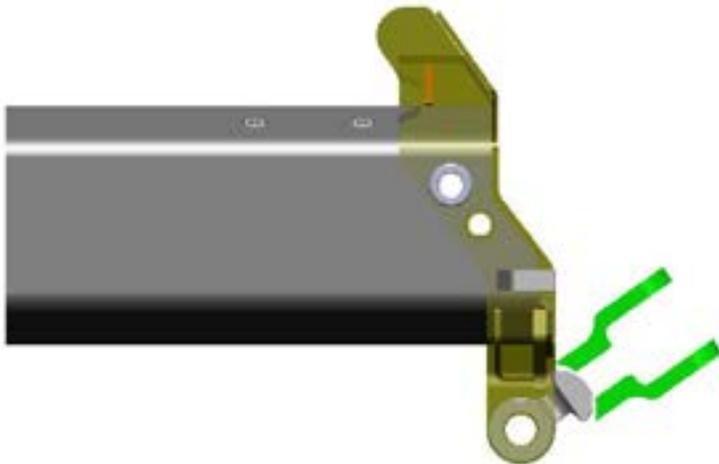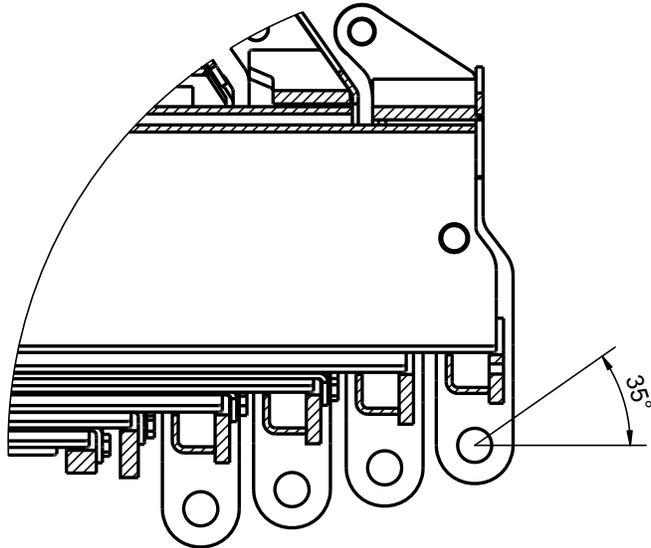

Centers of Gravity

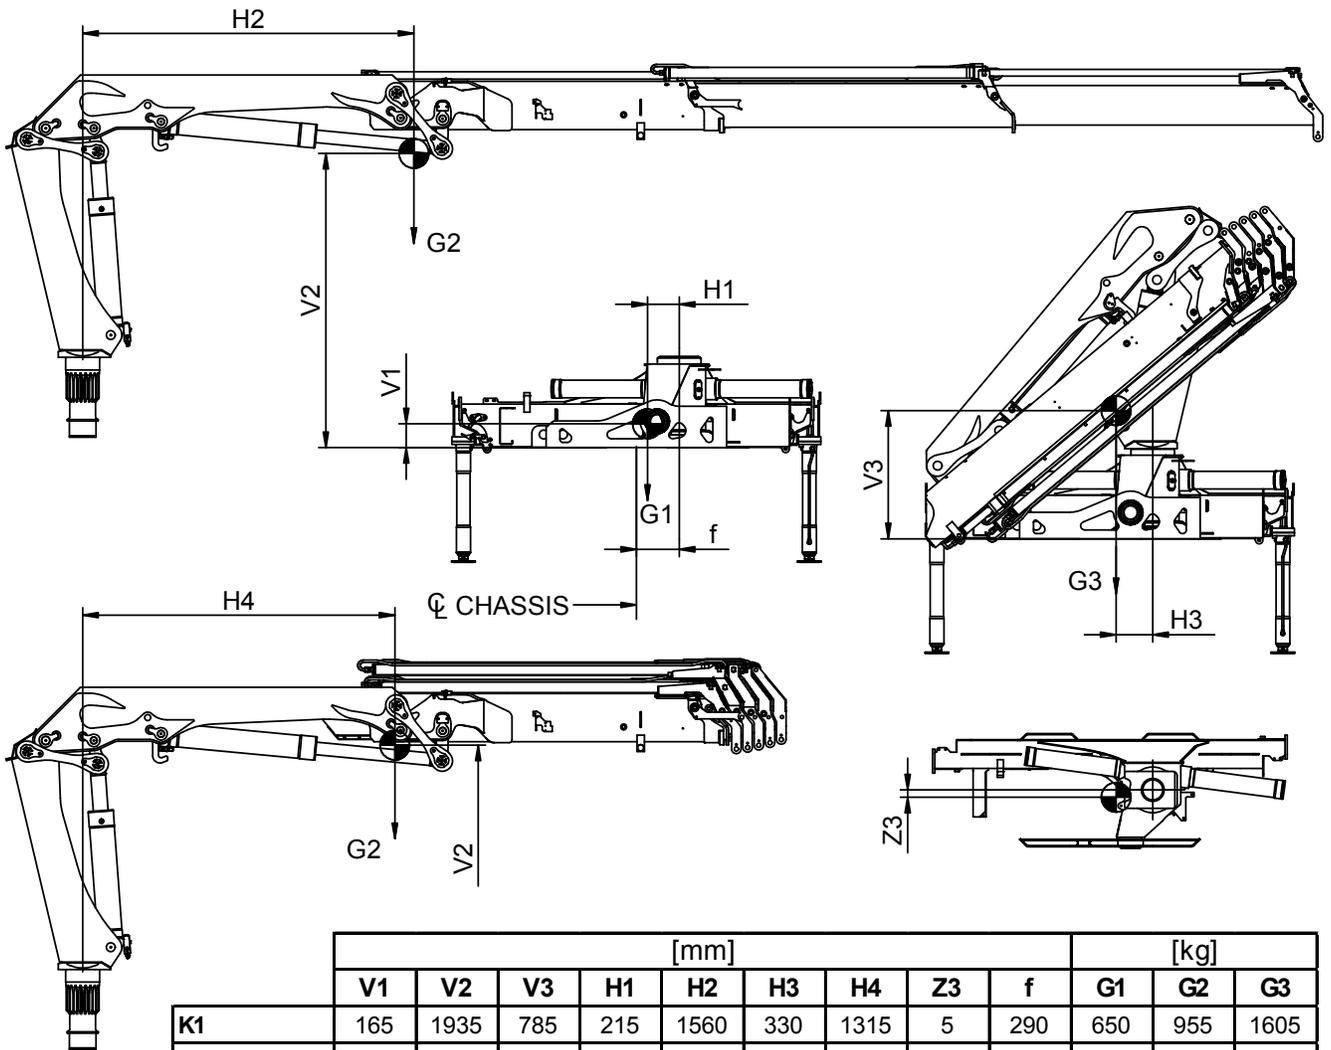

	[mm]									[kg]		
	V1	V2	V3	H1	H2	H3	H4	Z3	f	G1	G2	G3
K1	165	1935	785	215	1560	330	1315	5	290	650	955	1605
K2	165	1995	800	215	2245	325	1560	10	290	650	1100	1750
K3	165	2040	820	215	2980	315	1750	25	290	650	1240	1890
K4	165	2070	835	215	3755	305	1900	40	290	650	1370	2020
K5	165	2095	850	215	4495	300	2020	55	290	650	1480	2130
K6	165	2115	860	215	5130	280	2105	60	290	650	1585	2235

	[in]									[lbs]		
	V1	V2	V3	H1	H2	H3	H4	Z3	f	G1	G2	G3
K1	6.50	76.18	30.91	8.46	61.42	12.99	51.77	0.20	11.42	1433	2105	3538
K2	6.50	78.54	31.50	8.46	88.39	12.80	61.42	0.39	11.42	1433	2425	3858
K3	6.50	80.31	32.28	8.46	117.32	12.40	68.90	0.98	11.42	1433	2734	4167
K4	6.50	81.50	32.87	8.46	147.83	12.01	74.80	1.57	11.42	1433	3020	4453
K5	6.50	82.48	33.46	8.46	176.97	11.81	79.53	2.17	11.42	1433	3263	4696
K6	6.50	83.27	33.86	8.46	201.97	11.02	82.87	2.36	11.42	1433	3494	4927