

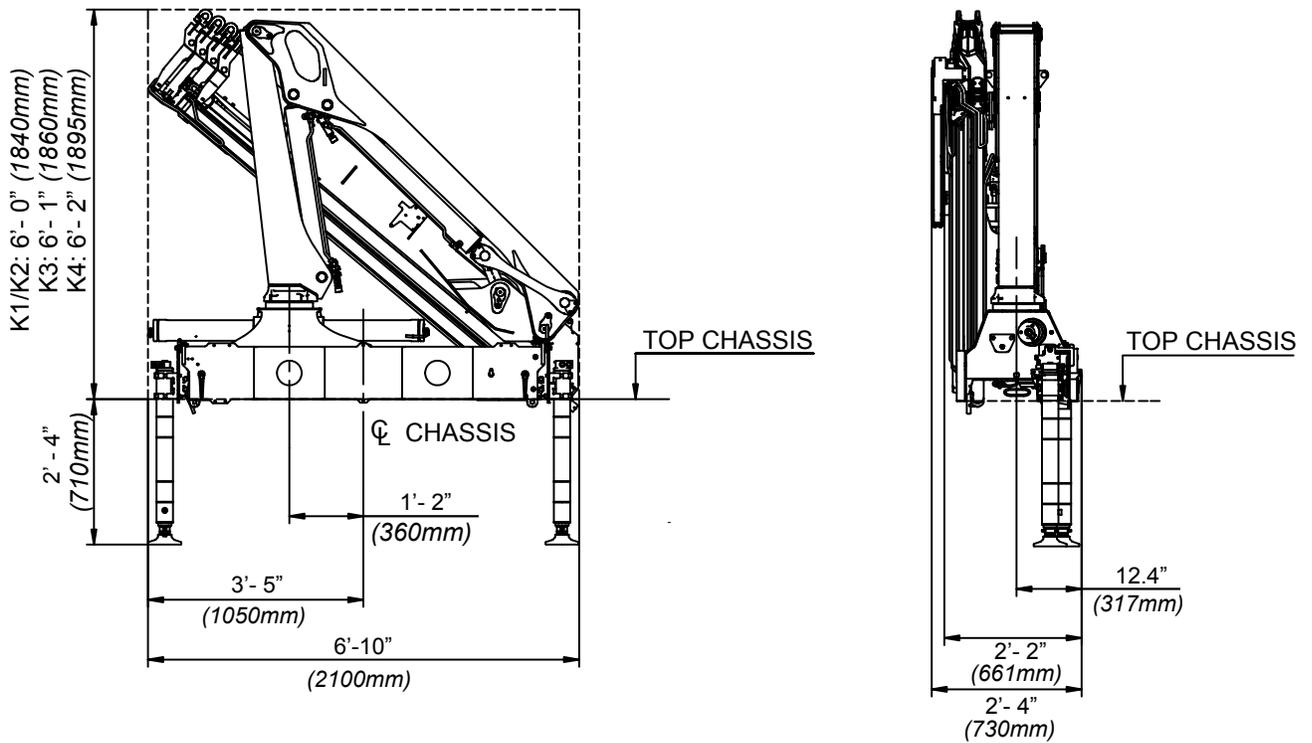



Dimension Sketch

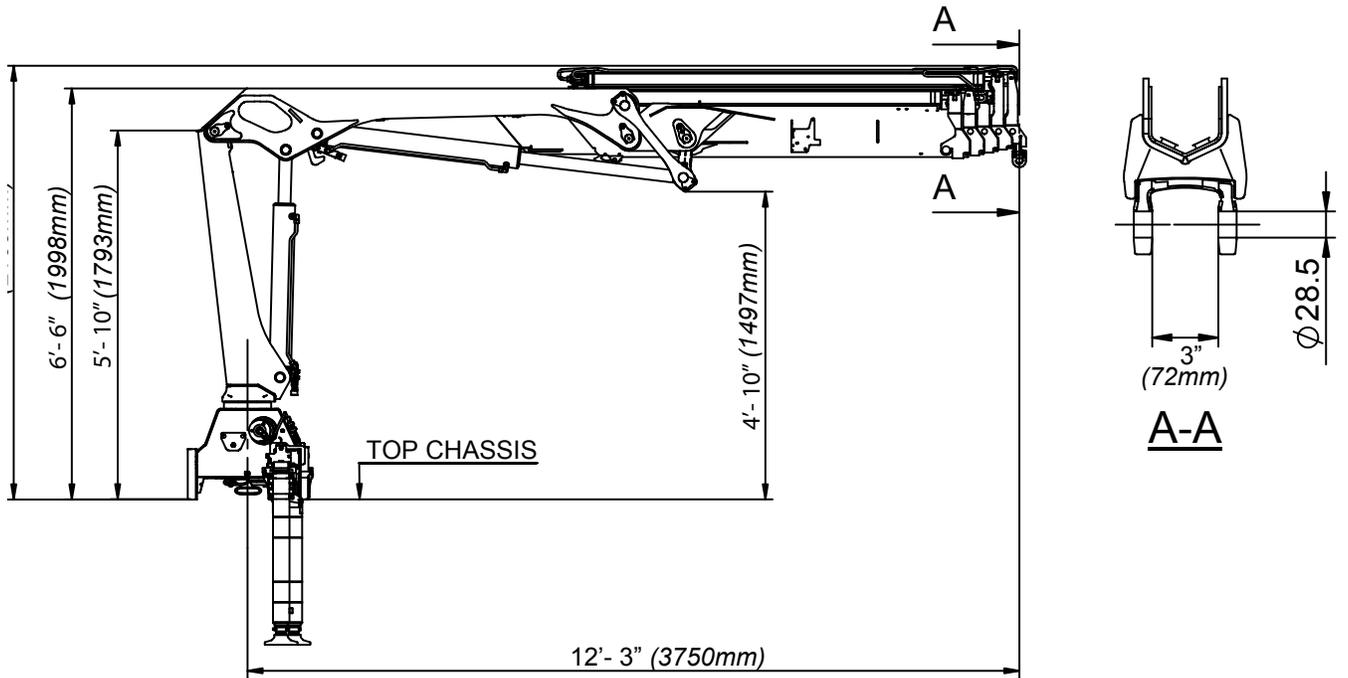

Slewing Radius

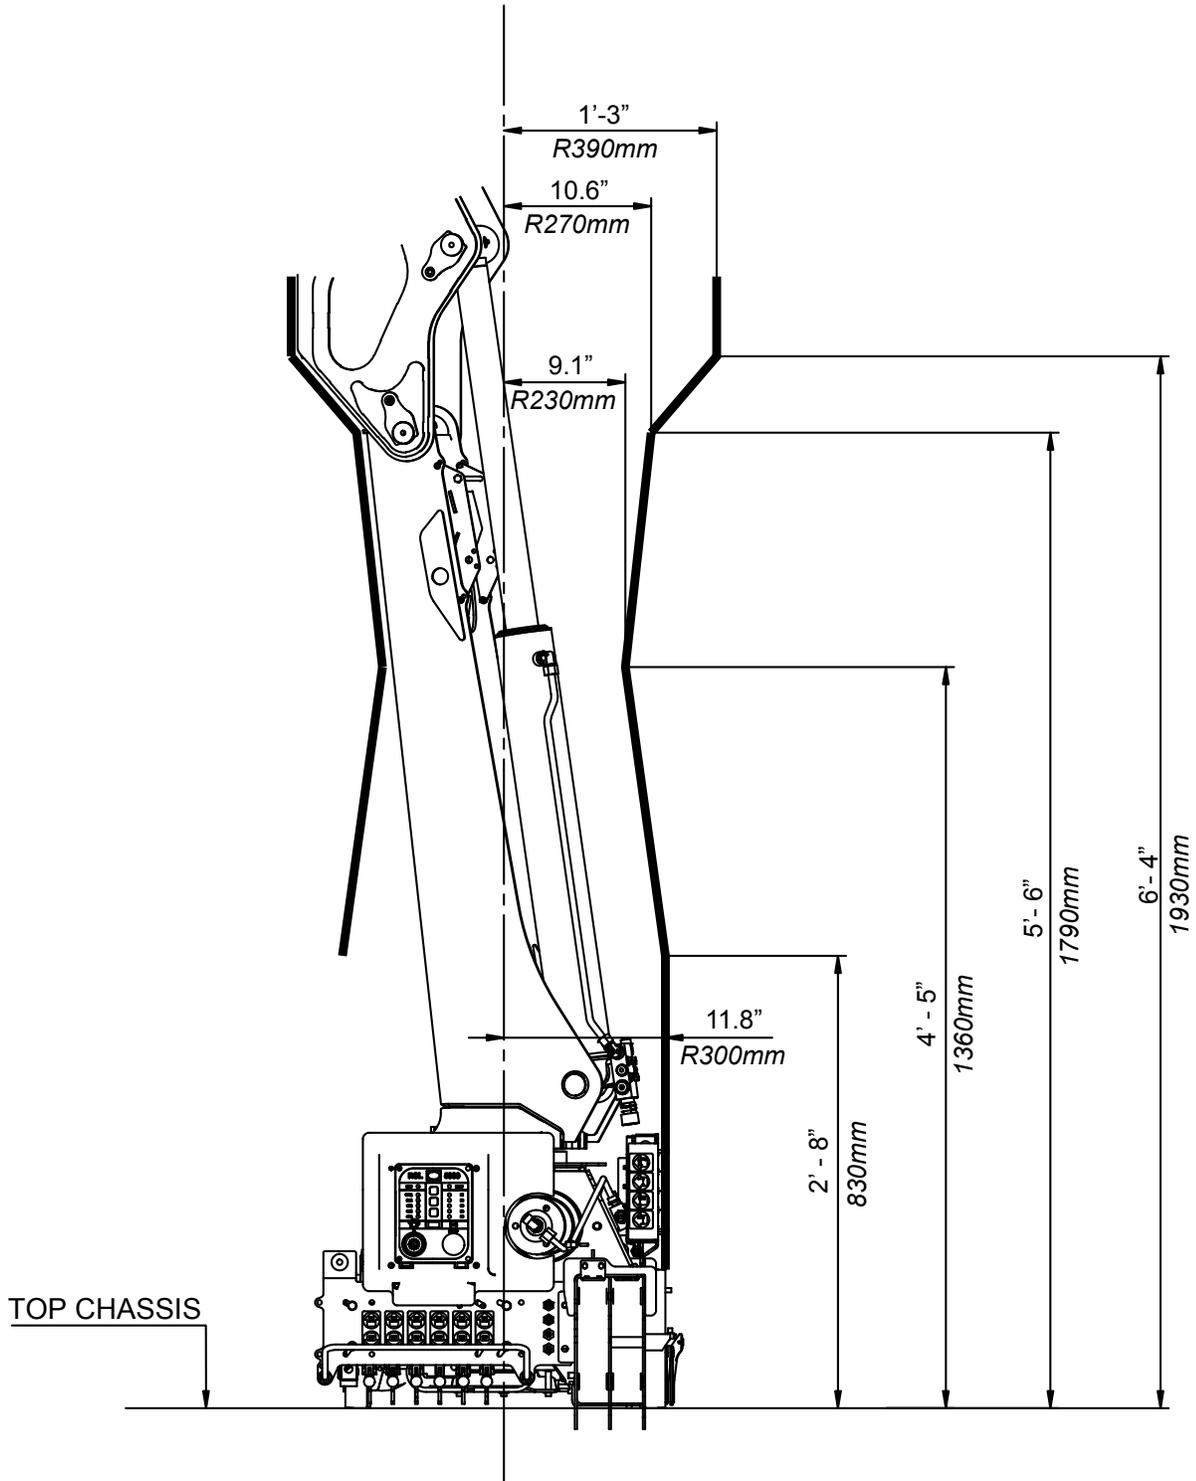


Lifting Height at Column

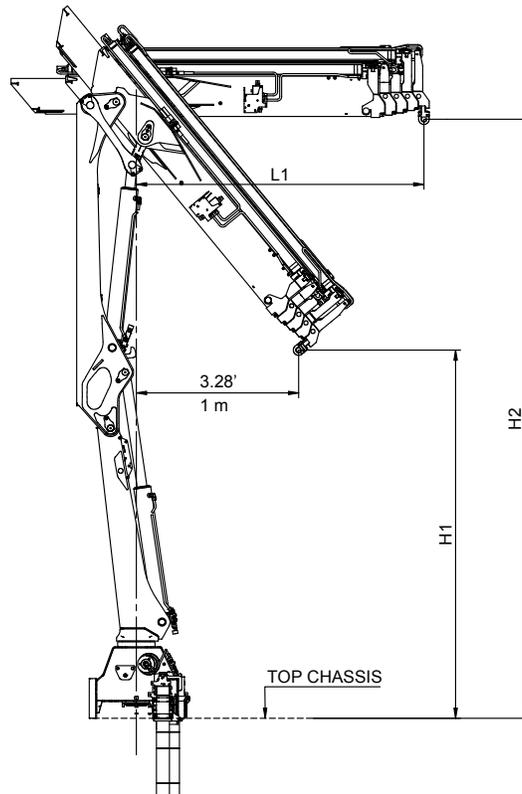

	H1 MM	H1 FEET/INCHES	H2 MM	H2 FEET/INCHES	L1 MM	L1 FEET/INCHES
K1	2530	8' 3"	3655	11' 11"	1565	5' 1"
K2	2445	8'	3670	12'	1635	5' 4"
K3	2355	7' 9"	3685	12' 1"	1705	5' 7"
K4	2270	7' 5"	3700	12' 1.6"	1775	5' 9"

Dimension Sketch: Internal Hose Routing

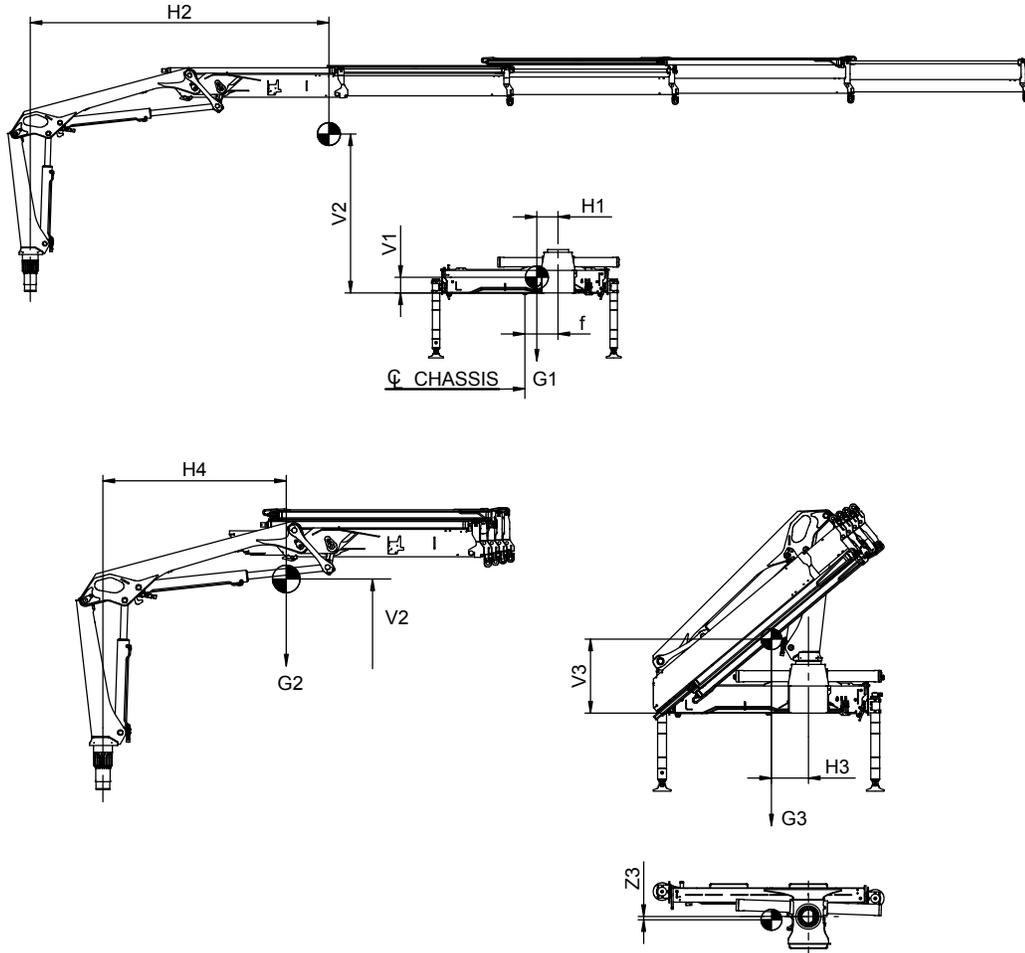

	MM									KG		
	V1	V2	V3	H1	H2	H3	H4	Z3	f	G1	G2	G3
610-K1	140	1830	590	235	1455	355	1220	-15	360	305	465	770
610-K2	140	1915	620	235	2055	355	1415	5	360	305	540	845
610-K3	140	1975	650	235	2670	345	1560	25	360	305	610	915
610-K4	140	2020	670	235	3245	335	1660	35	360	305	670	975
	FEET/INCHES									POUNDS		
	V1	V2	V3	H1	H2	H3	H4	Z3	f	G1	G2	G3
610-K1	5.5"	6'	1' 11"	9"	4' 9"	1' 2"	4'	-0.6"	1' 2"	1'	1' 6"	2' 6"
610-K2	5.5"	6' 3"	2'	9"	6' 8"	1' 2"	4' 8"	0.2"	1' 2"	1'	1' 9"	2' 6"
610-K3	5.5"	6' 5"	2' 1"	9"	8' 10"	1' 1.5"	5' 1"	.10"	1' 2"	1'	2'	3'
610-K4	5.5"	6' 7"	2' 2"	9"	10' 8"	1' 1"	5' 5"	1.4"	1' 2"	1'	2' 2"	3' 2"

Dimension sketch, winch

