
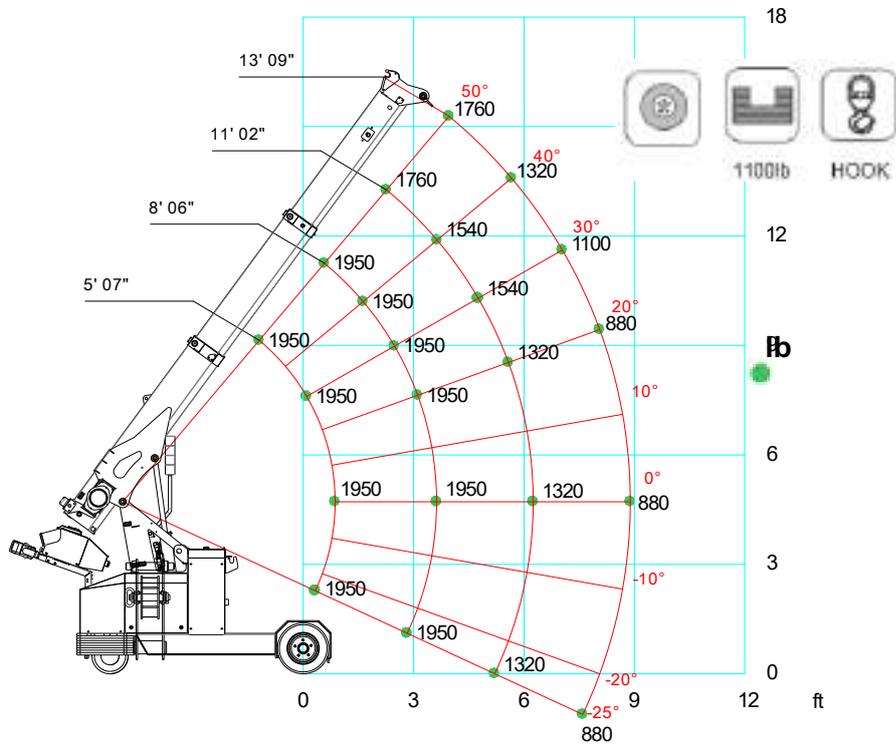





MPK10WD - HOOK





[ft] [lb]							
	1100lb			HOOK			
	5' 07"	7' 03"	8' 06"	9' 10"	11' 02"	12' 06"	13' 09"
50°	1950	1950	1950	1760	1760	1760	1760
45°	1950	1950	1950	1760	1760	1716	1540
40°	1950	1950	1950	1760	1540	1606	1320
35°	1950	1950	1950	1760	1540	1320	1100
30°	1950	1950	1950	1760	1540	1320	1100
25°	1950	1950	1950	1540	1320	1100	880
20°	1950	1950	1950	1540	1320	1100	880
15°	1950	1950	1950	1540	1320	1100	880
10°	1950	1950	1950	1540	1320	1100	880
5°	1950	1950	1950	1540	1320	1100	880
0°	1950	1950	1950	1540	1320	1100	880
-5°	1950	1950	1950	1540	1320	1100	880
-10°	1950	1950	1950	1540	1320	1100	880
-15°	1950	1950	1950	1540	1320	1100	880
-20°	1950	1950	1950	1540	1320	1100	880
-25°	1950	1950	1950	1540	1320	1100	880

MPK0020.04.02.000.2.06.15.A


MPK10WD + WINCH W600


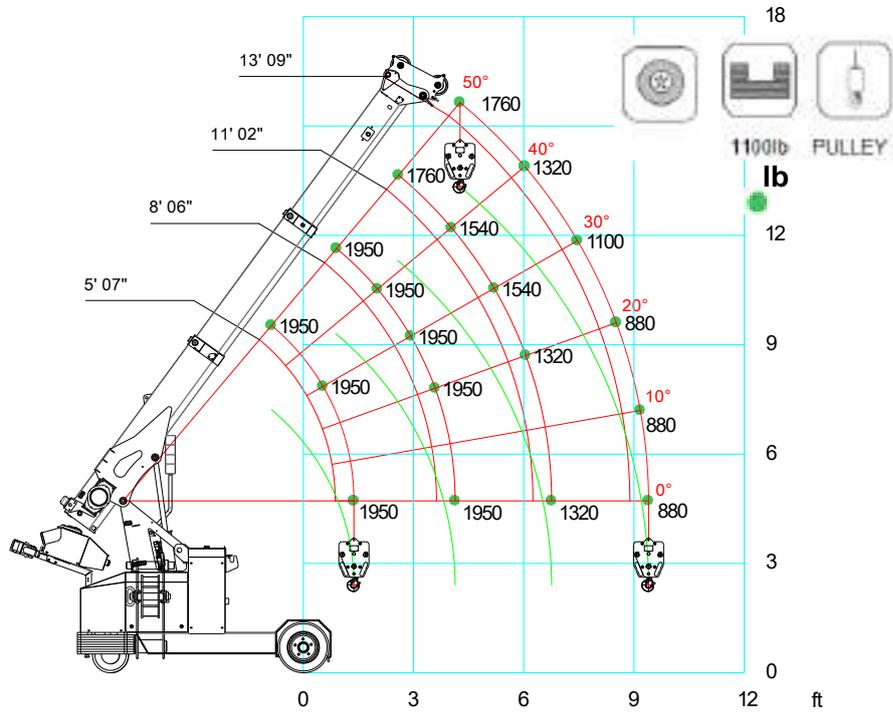


[ft] [lb]							
	1100lb PULLEY						
	6' 03"	7' 10"	9' 02"	10' 06"	11' 10"	13' 01"	14' 05"
50°	1950	1950	1950	1760	1760	1760	1760
45°	1950	1950	1950	1760	1760	1716	1540
40°	1950	1950	1950	1760	1540	1606	1320
35°	1950	1950	1950	1760	1540	1320	1100
30°	1950	1950	1950	1760	1540	1320	1100
25°	1950	1950	1950	1540	1320	1100	880
20°	1950	1950	1950	1540	1320	1100	880
15°	1950	1950	1950	1540	1320	1100	880
10°	1950	1950	1950	1540	1320	1100	880
5°	1950	1950	1950	1540	1320	1100	880
0°	1950	1950	1950	1540	1320	1100	880

MPK0020.04.02.000.1.06.15.A


MPK10WD + JIB500G



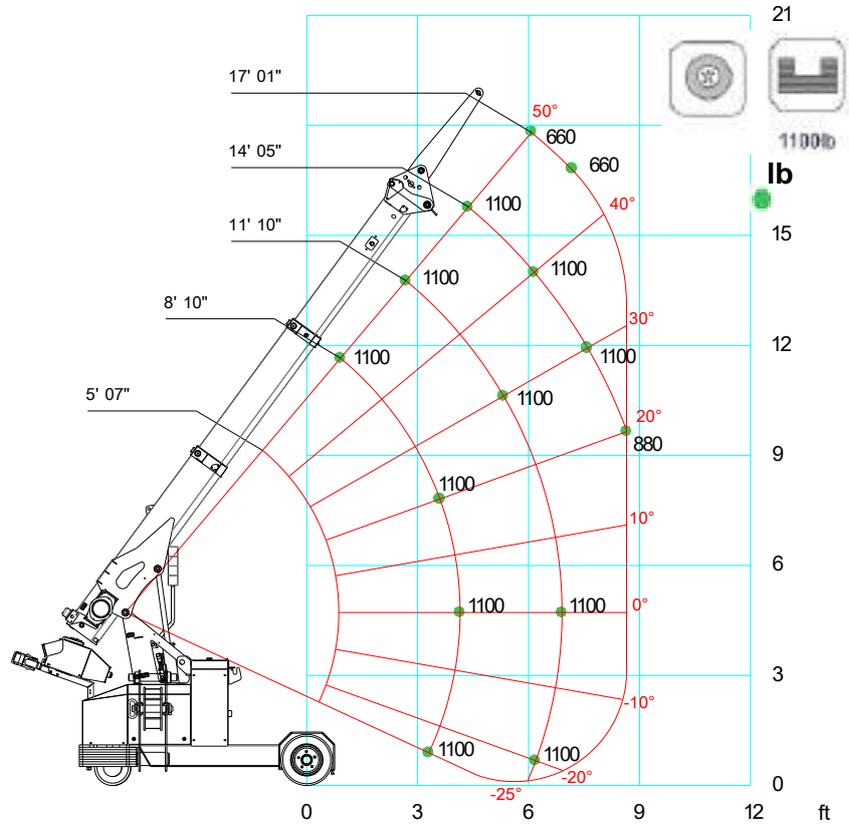


[ft] [lb]							
	JIB500G	1100lb					
	8' 10"	10' 06"	11' 10"	13' 01"	14' 05"	15' 09"	17' 01"
50°	1100	1100	1100	1100	1100	1100	660
45°	1100	1100	1100	1100	1100	1100	660
40°	1100	1100	1100	1100	1100	880	
35°	1100	1100	1100	1100	1100	880	
30°	1100	1100	1100	1100	1100		
25°	1100	1100	1100	1100	880		
20°	1100	1100	1100	1100	880		
15°	1100	1100	1100	1100			
10°	1100	1100	1100	1100			
5°	1100	1100	1100	1100			
0°	1100	1100	1100	1100			
-5°	1100	1100	1100	1100			
-10°	1100	1100	1100	1100			
-15°	1100	1100	1100	1100			
-20°	1100	1100	1100				
-25°	1100						

MPK0020.04.02.300.2.06.15.A

MPK10WD + MR800

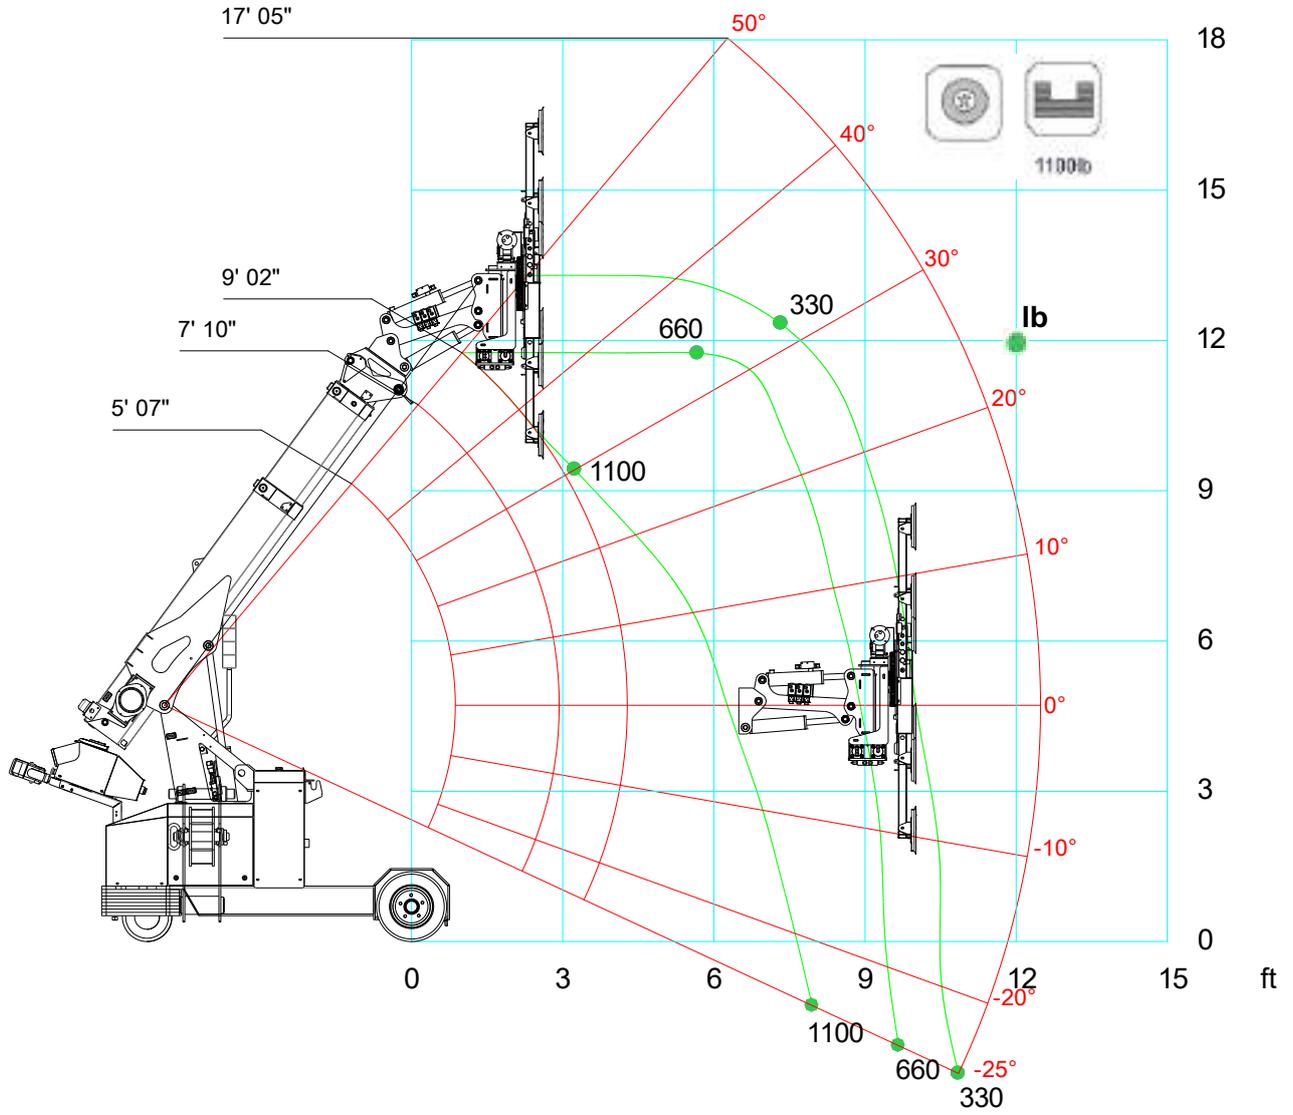

[ft] [lb]							
	MR800	1100lbs					
	8' 02"	10' 10"	12' 02"	13' 05"	14' 09"	16' 01"	17' 05"
50°	660	330					
45°	1100	330	330				
40°	1100	660	330	330			
35°	1100	660	660	330			
30°	1100	660	660	660			
25°	1100	660	660	660	330		
20°	1100	660	660	660	330		
15°	1100	660	660	660	330		
10°	1100	1100	660	660	330		
5°	1100	1100	660	660	330		
0°	1100	1100	660	660	330		
-5°	1100	1100	660	660	330		
-10°	1100	1100	1100	660	660		
-15°	1100	1100	1100	660	660	330	
-20°	1100	1100	1100	1100	660	330	
-25°	1100	1100	1100	1100	660	660	330

MPK0020.04.02.430.0.06.15.A