


MAIN BOOM



80%
264 bar

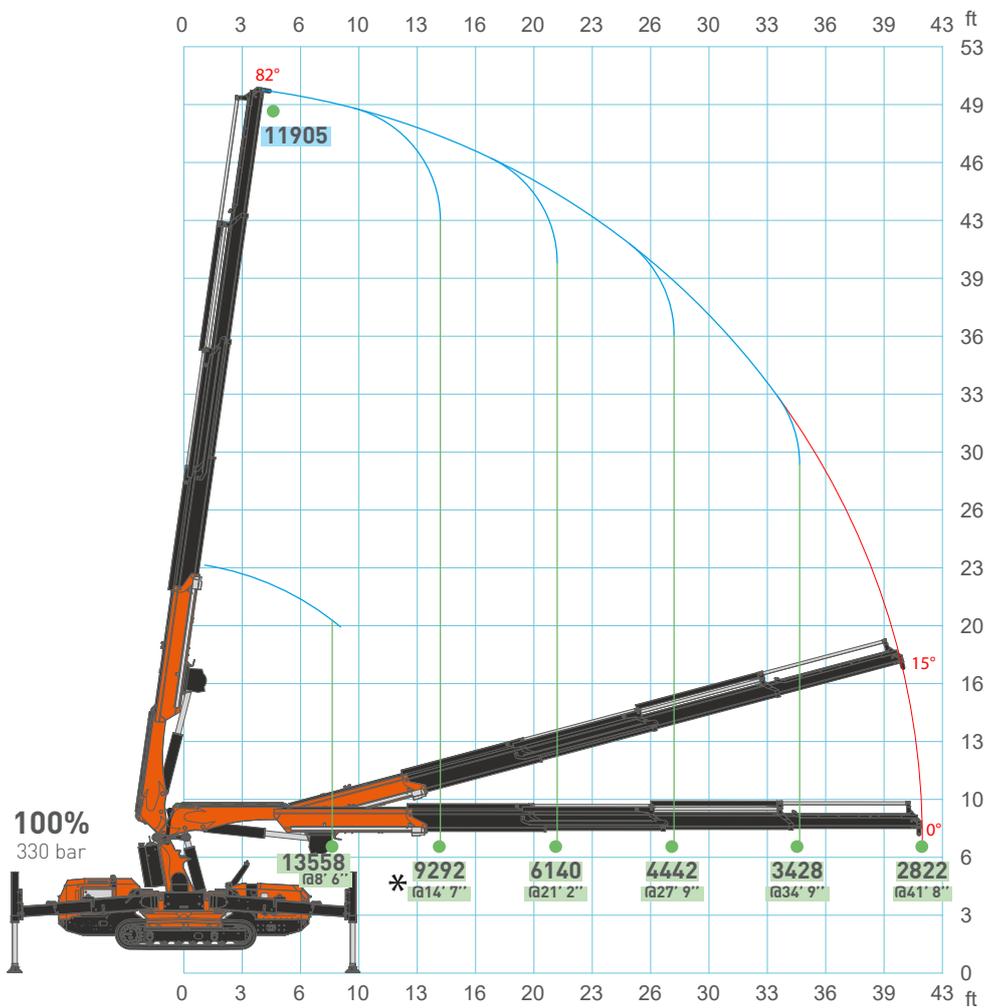


60%
198 bar



40%
132 bar





20%
66 bar

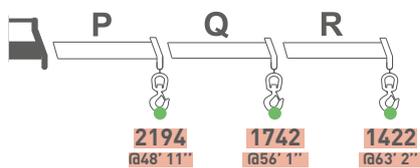

[ft] [lb]


MAIN BOOM

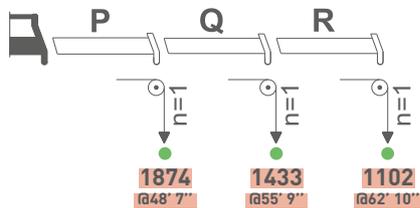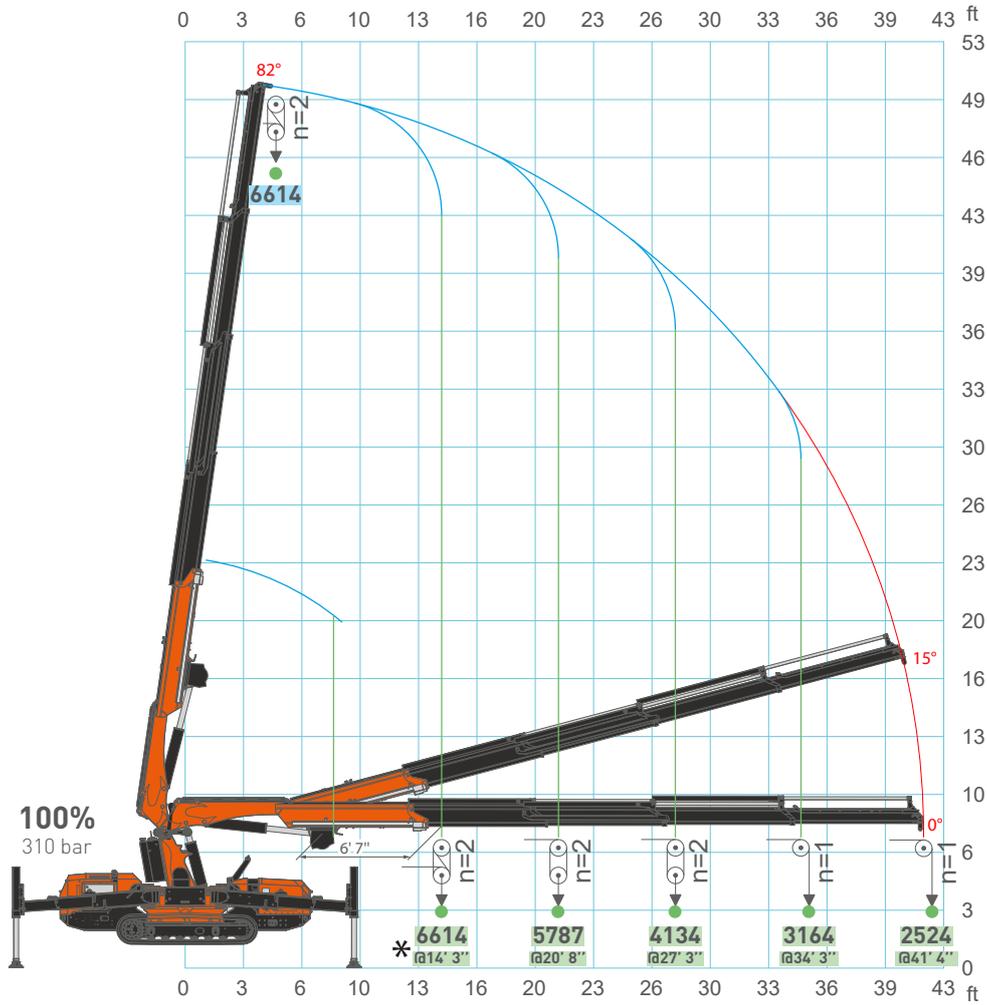


[ft] [lb]

JF235 Jib load chart

JIB

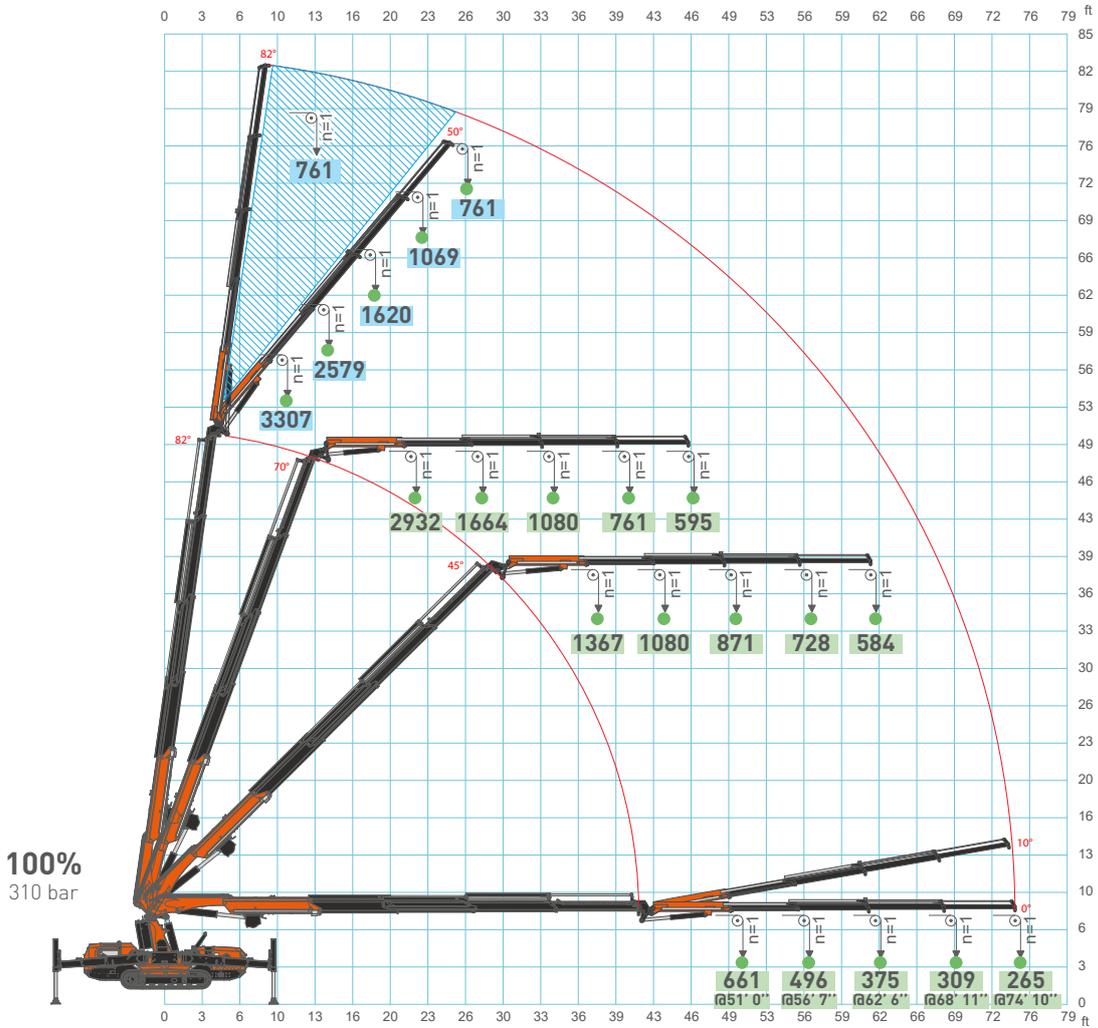

80%
248 bar




[ft] [lb]

PLE



V15

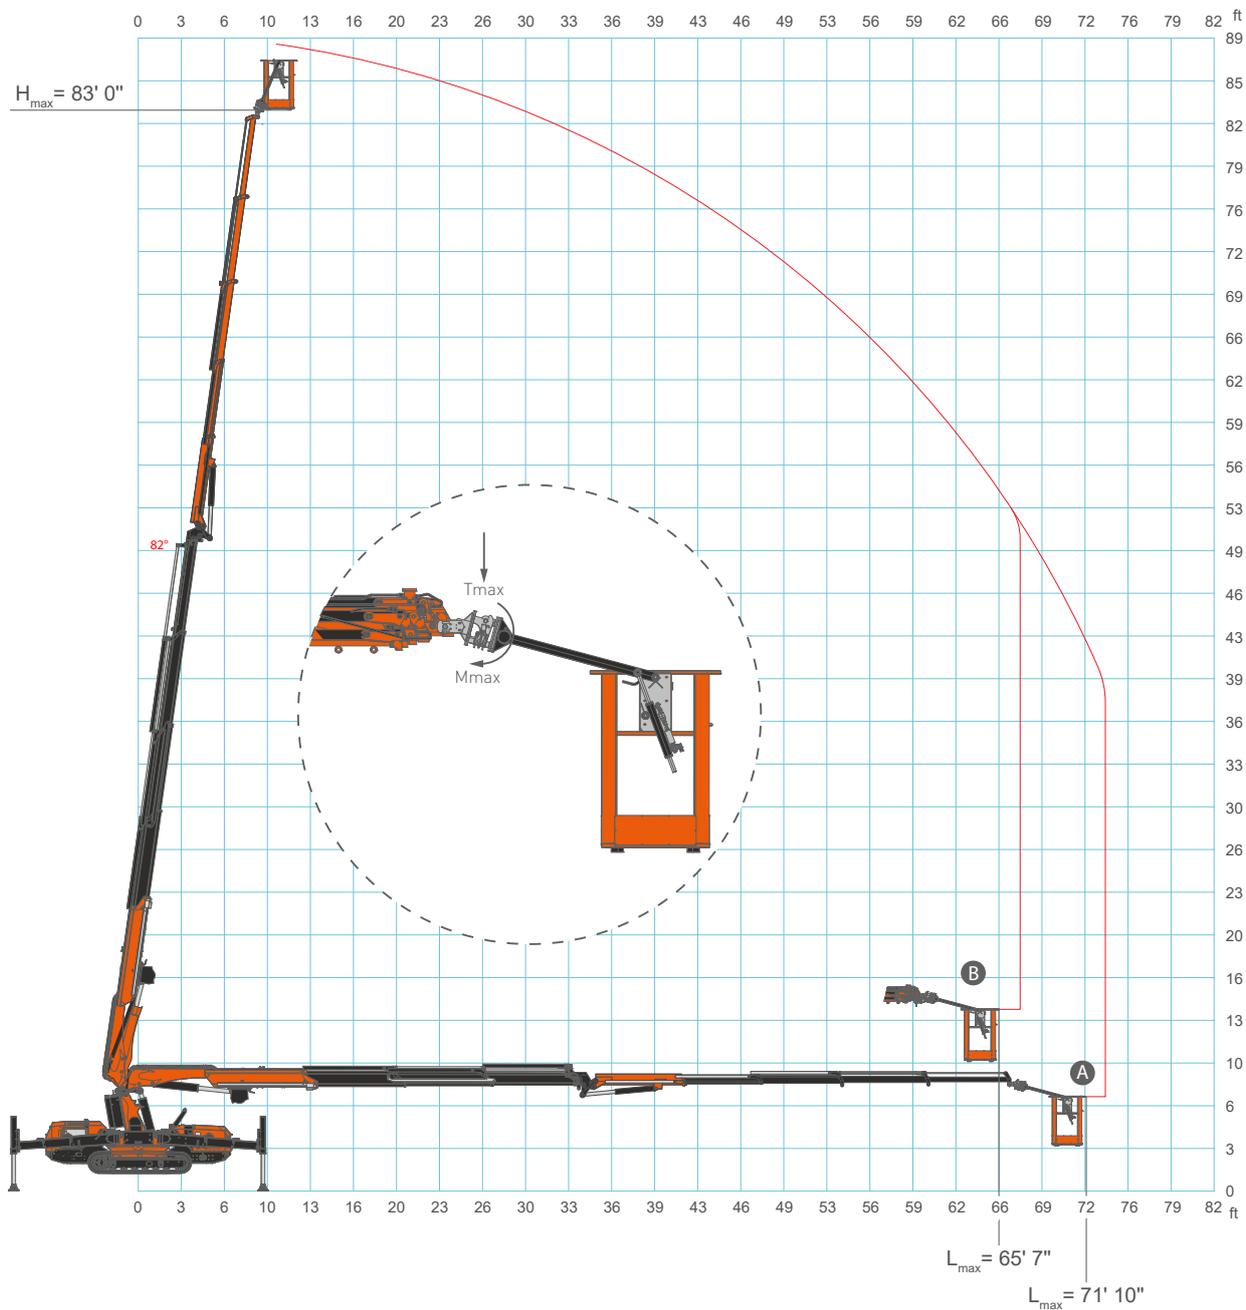


A	PLE	MWP-1PG.JIB2500.4HA	P_{max}	265 lb
B		MWP-2PG.JIB2500.4HA	P_{max}	441 lb

*: The crane is equipped with LMI. The maximum reachable distance may vary by about 3' 3".

** : The maximum reachable distance can be reached by extending the JIB first and then extending the boom.

JF235 Iron working platform chart

PLE

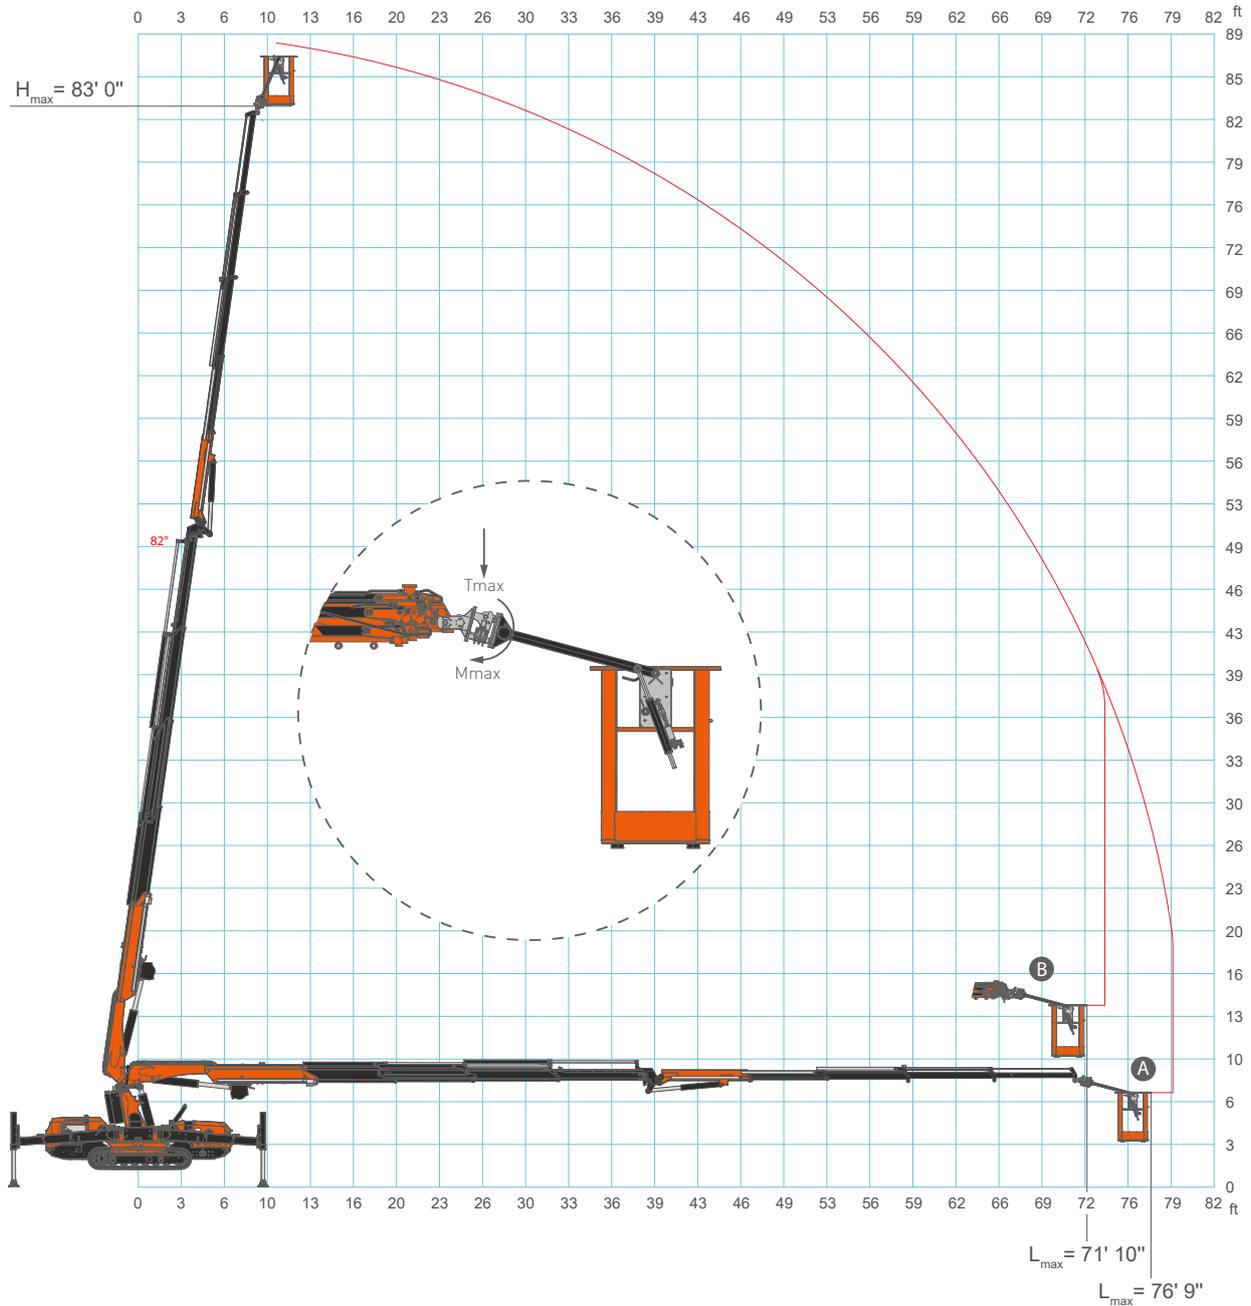

A	PLE	MWP-1PG.JIB2500.4HA	P _{max}	265 lb
B		MWP-2PG.JIB2500.4HA	P _{max}	441 lb


*: The crane is equipped with LMI. The maximum reachable distance may vary by about 3' 3".

** : The maximum reachable distance can be reached by extending the JIB first and then extending the boom.

PLE



V15

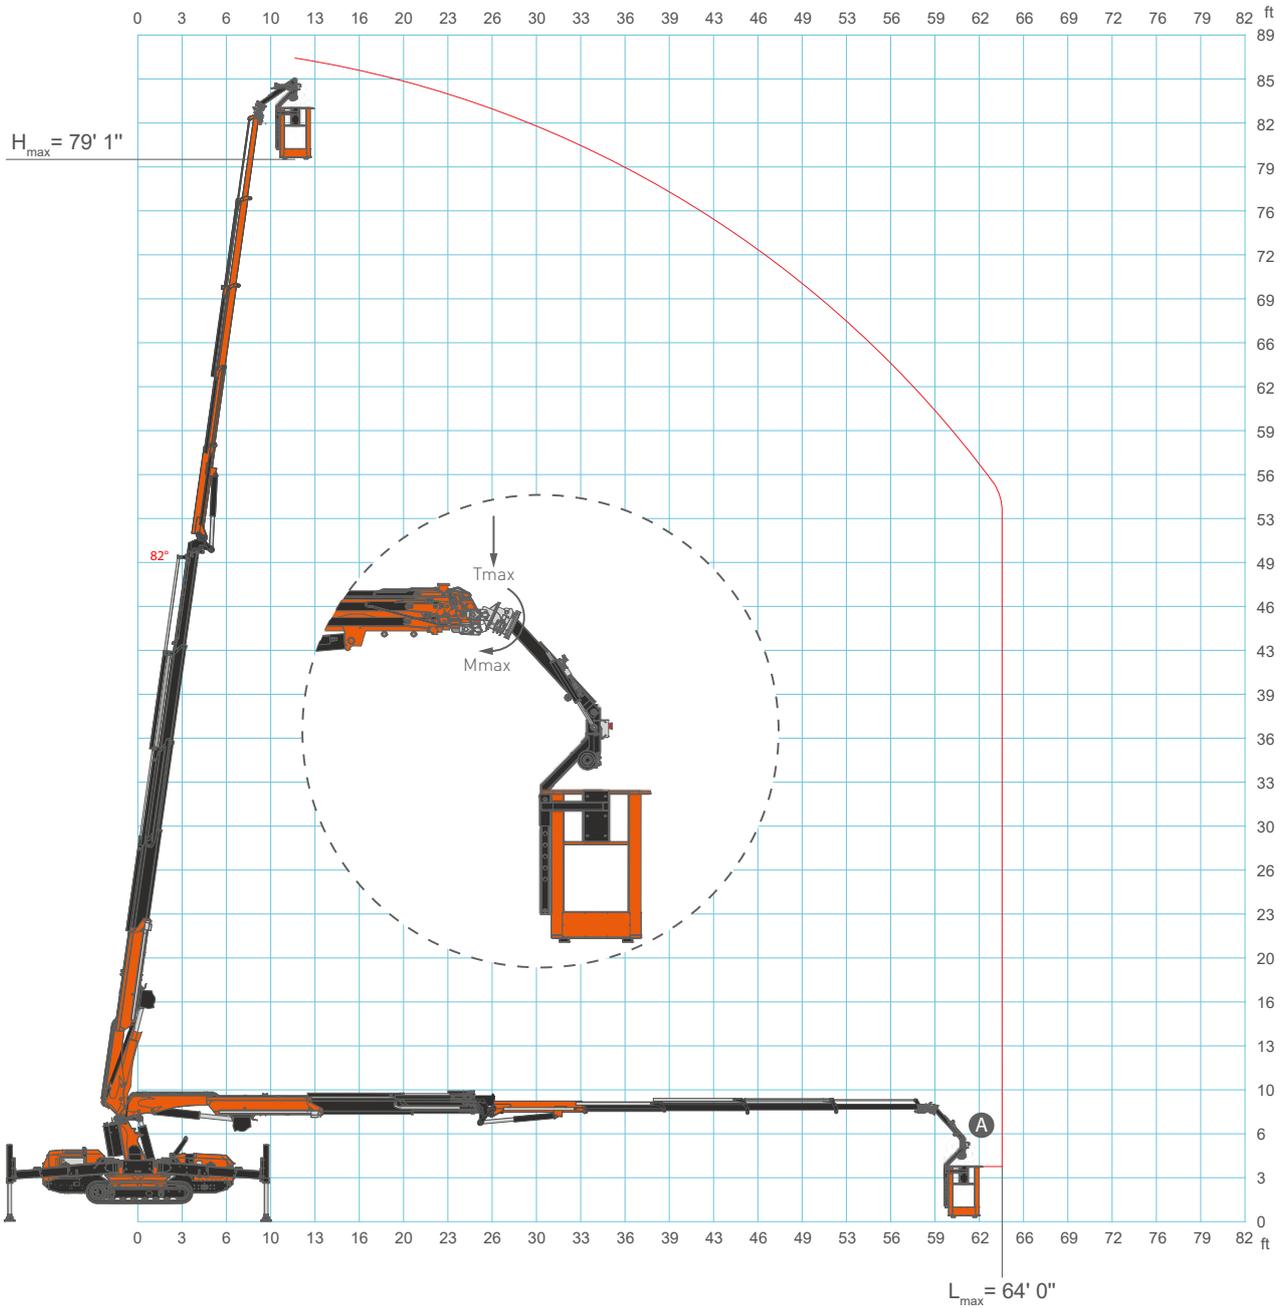


A	PLE	MWP-2PGR.JIB2500.4HA	With activation	P_{max}	441 lb
----------	-----	----------------------	-----------------	-----------	--------

*: The crane is equipped with LMI. The maximum reachable distance may vary by about 3' 3".

** : The maximum reachable distance can be reached by extending the JIB first and then extending the boom.

JF235 Aluminium working platform chart

PLE

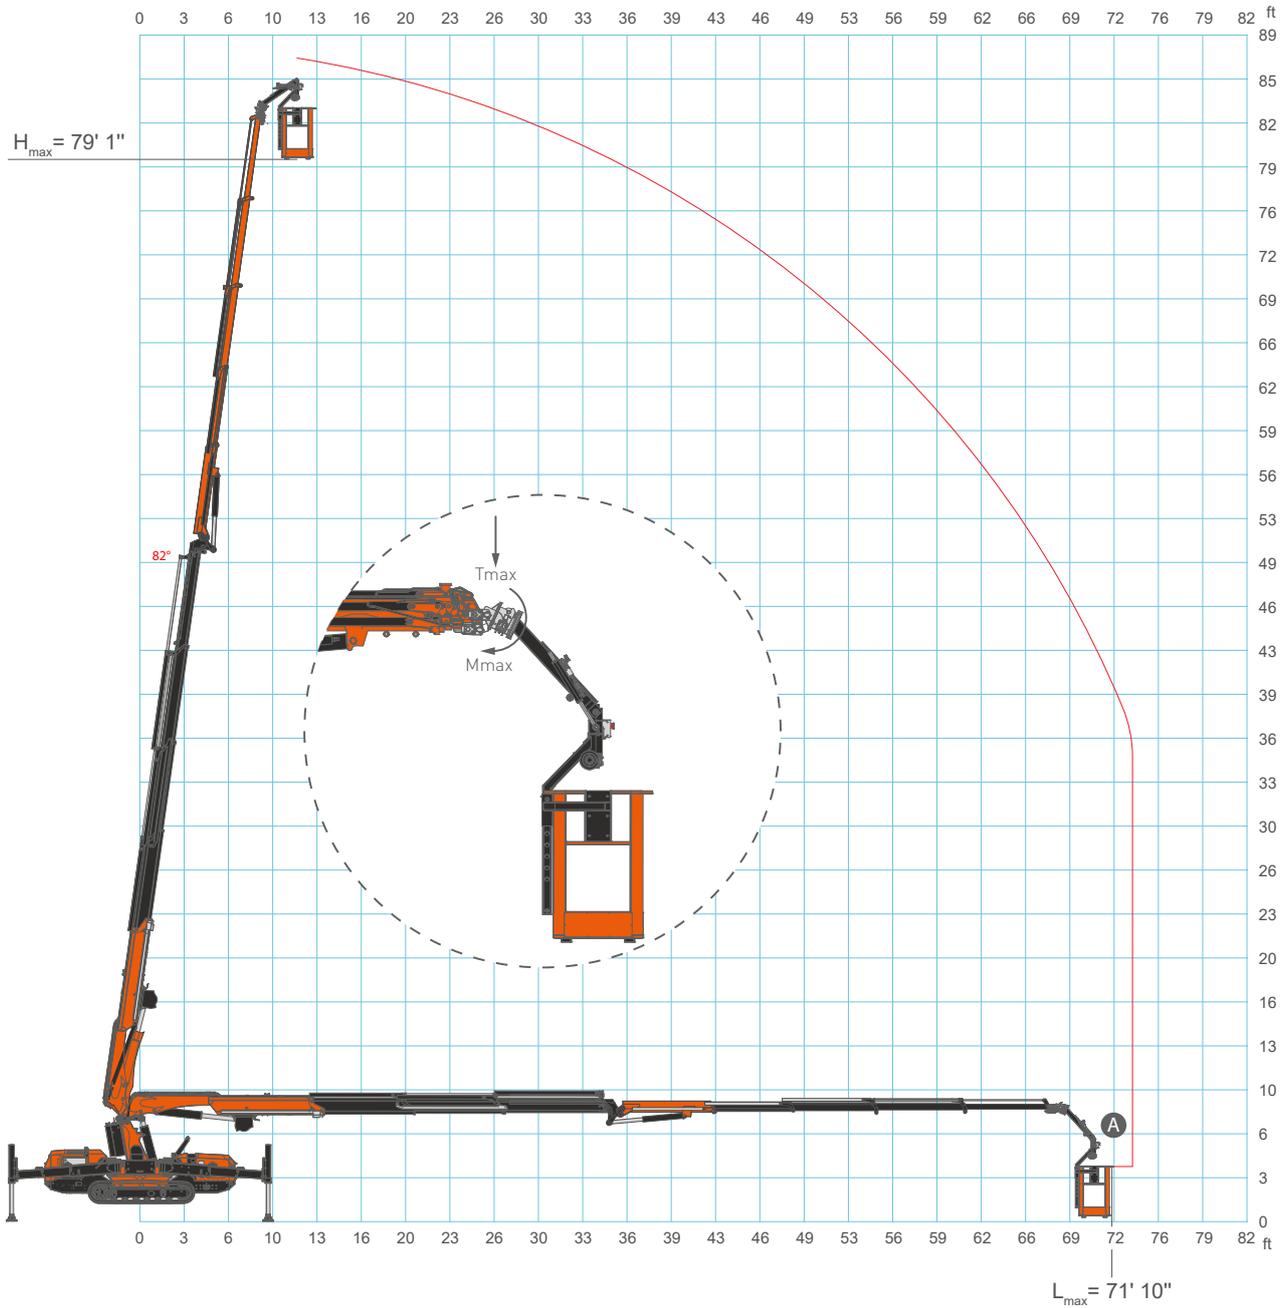

A	PLE	MWP-2PGR.JIB2500.4HA	Without activation	P_{max}	441 lb
---	-----	----------------------	--------------------	-----------	--------

*: The crane is equipped with LMI. The maximum reachable distance may vary by about 3' 3".

** : The maximum reachable distance can be reached by extending the JIB first and then extending the boom.