


Transportation plan

Plan de transport

Part · Partie

Winches 1 and 2
Treuils 1 et 2




US283-0006-00

US283-0007-00

18,500 lb + 18,500 lb

SA-Frame incl. winch IV · Chevalet SA incl. treuil 4

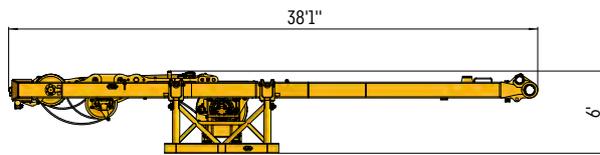

1


US283-0008-00

38,600 lb

+3,530 lb
Transport bracket
Support de transport

1

Superstructure without SA-frame and winches · Partie tournante sans chevalet SA et treuils

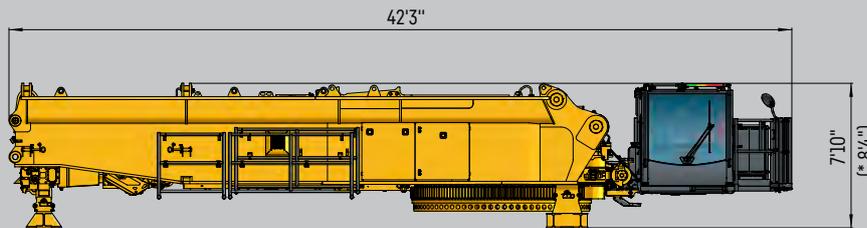

2

*with SA-frame · avec chevalet SA

2


US283-0009-00W

90,400 lb
(incl. QC)

+3,100 lb
Transport bracket
Support de transport

2

Middle section
Partie centrale

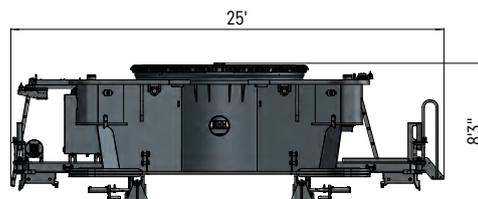

3

3

US283-0010-00W


75,000 lb

+1,750 lb
Transport bracket
Support de transport

3

Outriggers
Stabilisateurs

2 pairs
paires

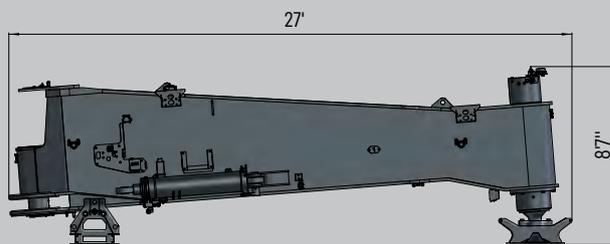

4

US283-0030-00W

2 x 26,450 lb
including support
plates
plaques d'appui incl.

+880 lb
Transport bracket
Support de transport

4

Total · total:

346,800 lb

129,000
lb

165,400
lb

204,000
lb

166,000
lb

+Transport bracket
+Support de transport

Transportation plan


Plan de transport

Part · Partie



HD crawler carrier (for 4-way drive, 6 ft 7 in pads)


Supports de chenilles HD (pour entraînement quadruple, plaques 6 ft 7 in)

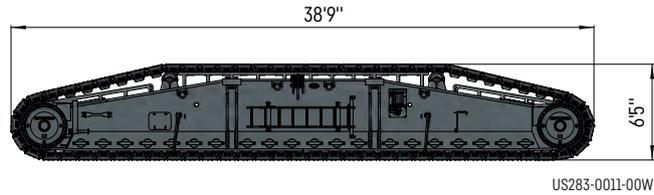

2 x 130,100 lb

Narrow-gauge crawler center section

Partie centrale des chenilles pour voie étroite




22,050 lb or
25,150 lb
including track
connectors
Connecteur de
chenille inclus

Central ballast frame

Cadre de lestage lest central

2 pcs.
pièces




2 x 5,500 lb

Support mat

Protection d'appui





4 pcs.
pièces



4 x 7,700 lb

3 x transport >11 ft 6 in<

3 x transport >11 ft 6 in<

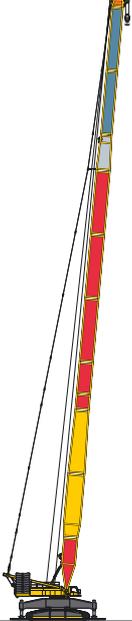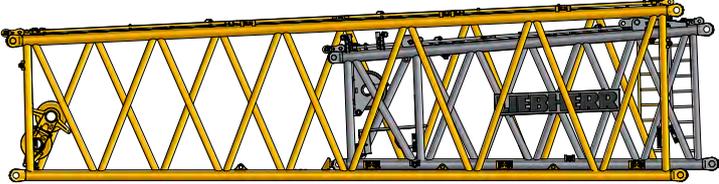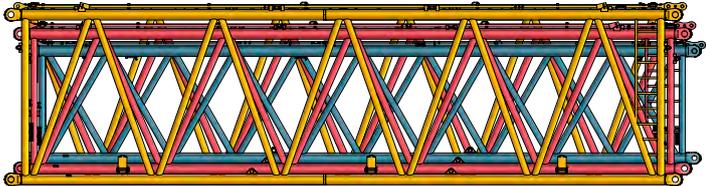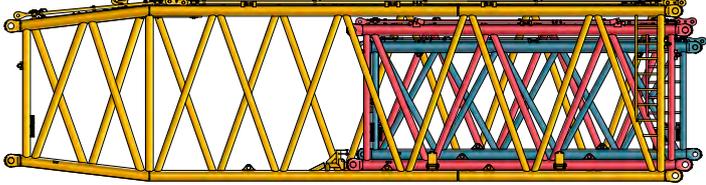Example Exemple	Gross weight Poids total	
	<p>33,950 lb</p>	
	<p>max. 65,500 lb</p>	
	<p>49,200 lb</p>	

All other components are ≤ 9 ft 10 in · Tous les autres composants sont ≤ 9 ft 10 in