


Ausladung und Hubhöhe • Radius and hoisting height • Portée et hauteur de levage
 Sbraccio e altezza di sollevamento • Alcance y altura de elevación • Alcance e altura de elevação
 Вылет и Высота подъема

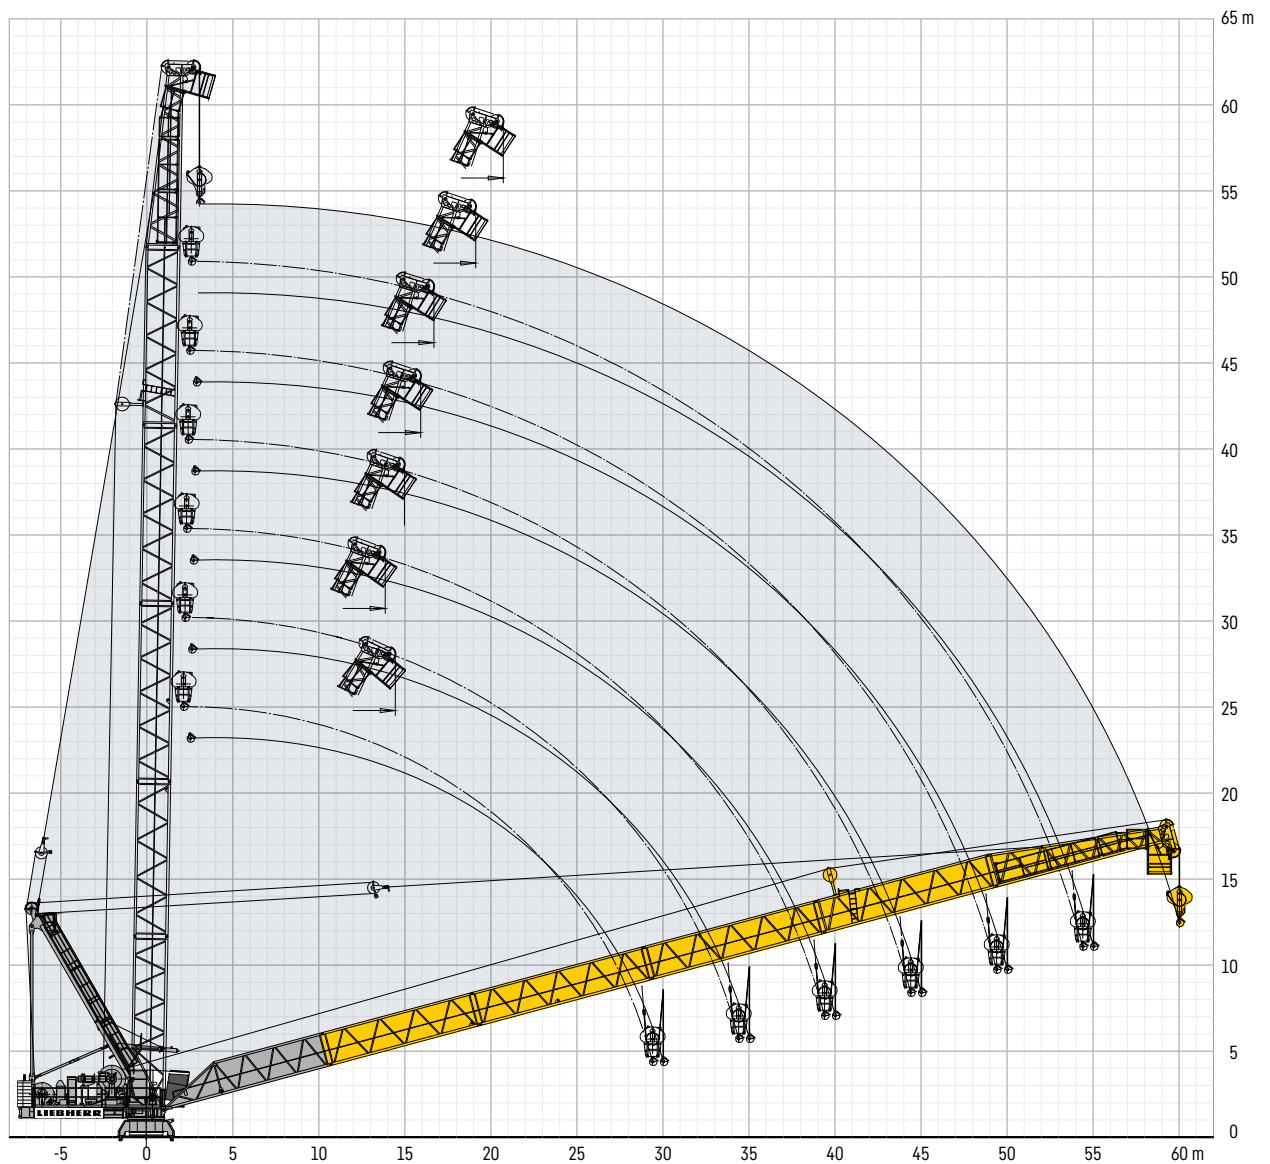

Minimum Ausladung außer Betrieb • Minimum radius out of operation • Portée minimum hors service • Sbraccio minimo fuori servizio • Alcance mínimo fuera de servicio • Alcance mínimo fora de operação • Минимальный вылет вне работы

Ausleger (m) • Jib • Flèche
 Braccio • Pluma • Lança • Стрела

Außerbetriebsstellung (α°) • Out-of-operation position • Position hors service • Posizione fuori servizio
 Posición externa de la empresa • Posição fora de operação • Положение вне работы

 355 IC • 24 HC 420 • 24 HC 630	α	$\downarrow$ (m)	$\bigcirc$ (m)
60	72°	20,7	-
55	72°	19,1	18,6
50	73°	16,7	16,2
45	72°	15,9	15,4
40	71°	15,0	14,5
35	70°	13,9	13,4
30	65°	14,6	14,1

Ausladung und Tragfähigkeit · Radius and capacity · Portée et charge · Sbraccio e portata Alcances y cargas · Alcance e capacidade de carga · Вылет и грузоподъемность

m			t	m										
15,0	18,0	21,0		24,0	27,0	30,0	35,0	40,0	45,0	50,0	55,0	60,0		
60,0		3,1 - 28,0	12	12,00				11,01	8,94	7,30	5,95	4,82	3,85	3,00
55,0		3,0 - 22,0	16	16,00			14,55	12,72	11,19	9,12	7,48	6,12	4,98	4,00
		2,7 - 16,5	20	20,00	18,29	15,49	13,28	11,48	9,96	7,91	6,28	4,93	3,79	2,90
50,0		3,0 - 23,0	16	16,00			15,26	13,34	11,74	9,57	7,83	6,41	5,20	
		2,6 - 15,0	24	24,00	19,94	16,87	14,44	12,45	10,79	8,53	6,73	5,25	4,10	
45,0		2,9 - 24,0	16	16,00				13,96	12,26	9,96	8,13	6,60		
		2,5 - 14,0	28	26,15	21,68	18,30	15,62	13,43	11,59	9,10	7,11	5,60		
40,0		2,8 - 24,8	16	16,00				14,49	12,73	10,34	8,40			
		2,4 - 15,0	28	28,00	23,12	19,44	16,51	14,13	12,13	9,41	7,40			
35,0		2,7 - 25,8	16	16,00				15,17	13,33	10,80				
		2,3 - 16,0	28	28,00	24,61	20,54	17,32	14,69	12,48	9,70				
30,0		2,6 - 26,7	16	16,00				15,78	13,80					
		2,2 - 17,0	28	28,00	26,23	21,77	18,23	15,33	13,20					

Tragfähigkeiten gültig bis 100 m Hubhöhe. Über 100 m Hubhöhe reduziert sich die Tragfähigkeit um das zusätzliche Seilgewicht. · Lifting capacities valid up to 100 m hoisting height. Over 100 m hoisting height, the lifting capacity is reduced by the additional rope weight. · Capacités de levage valables jusqu'à 100 m de hauteur sous crochet. Au-dessus de 100 m de hauteur sous crochet, la capacité de levage est réduite du poids de câble supplémentaire. · Portate valide fino a 100 m d'altezza di sollevamento. Oltre i 100 m si riduce la portata causa il peso addizionale della fune. · Cargas válidas hasta altura de 100 m. Por encima de los 100 m se reduce la carga por el peso adicional del cable. · Cargas válidas ate à altura de 100 m. Para além dos 100 m, reduz-se a carga pelo peso adicional do cabo. · Грузоподъемность действительна до 100 м высоты подъема. Свыше 100 м высоты подъема грузоподъемность сокращается на вес дополнительного каната.