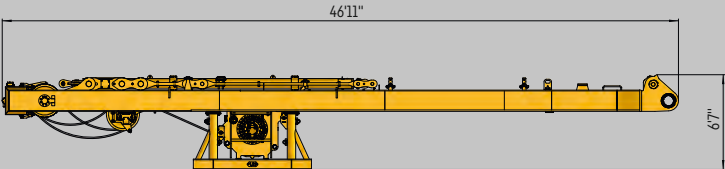
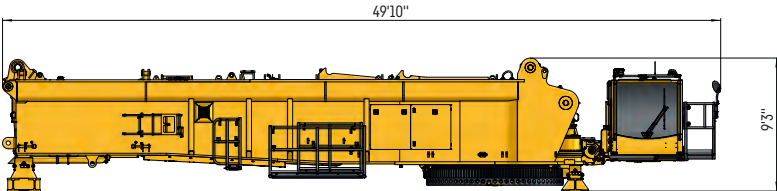
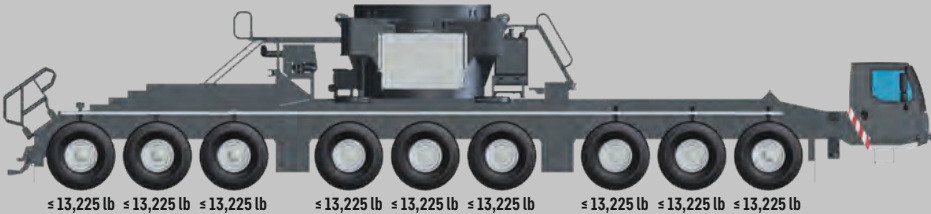



Transportation plan

Plan de transport


Part - Partie SA-frame, winch 4 incl. rope and pulley block Chevalet SA, treuil 4 incl. câble et bloc de poulies  1 US289-0015-00		48,500 lb + 2,430 lb Transport bracket Support de transport 1
Superstructure with quick connection Partie tournante avec quick connection  2 US289-0021-00		108,000 lb (incl. QC) +3,750 lb Transport bracket Support de transport 2
On-road driving 1: without 4 folding beams, 4 folding cylinders remain on the crane Déplacement sur route 1: sans les 4 montants rabattables, les 4 vérins pivotants restent sur la grue  ≤ 13,225 lb ≤ 13,225 lb ≤ 13,225 lb ≤ 13,225 lb ≤ 13,225 lb ≤ 13,225 lb ≤ 13,225 lb ≤ 13,225 lb ≤ 13,225 lb ≤ 13,225 lb		≤ 119,025 lb
On-road driving 2: incl. 2 folding beams diagonal Déplacement sur route 2: avec 2 montants rabattables en diagonale  ≤ 17,650 lb ≤ 17,650 lb ≤ 17,650 lb ≤ 17,650 lb ≤ 17,650 lb ≤ 17,650 lb ≤ 17,650 lb ≤ 17,650 lb ≤ 17,650 lb ≤ 17,650 lb		≤ 158,850 lb
On-road driving 3: incl. all 4 folding beams Déplacement sur route 3: avec tous les 4 montants rabattables  ≤ 22,050 lb ≤ 22,050 lb ≤ 22,050 lb ≤ 22,050 lb ≤ 22,050 lb ≤ 22,050 lb ≤ 22,050 lb ≤ 22,050 lb ≤ 22,050 lb ≤ 22,050 lb		≤ 198,450 lb
Total - total:		156,500 lb + 2

Economic transport worldwide


Un transport économique partout dans le monde

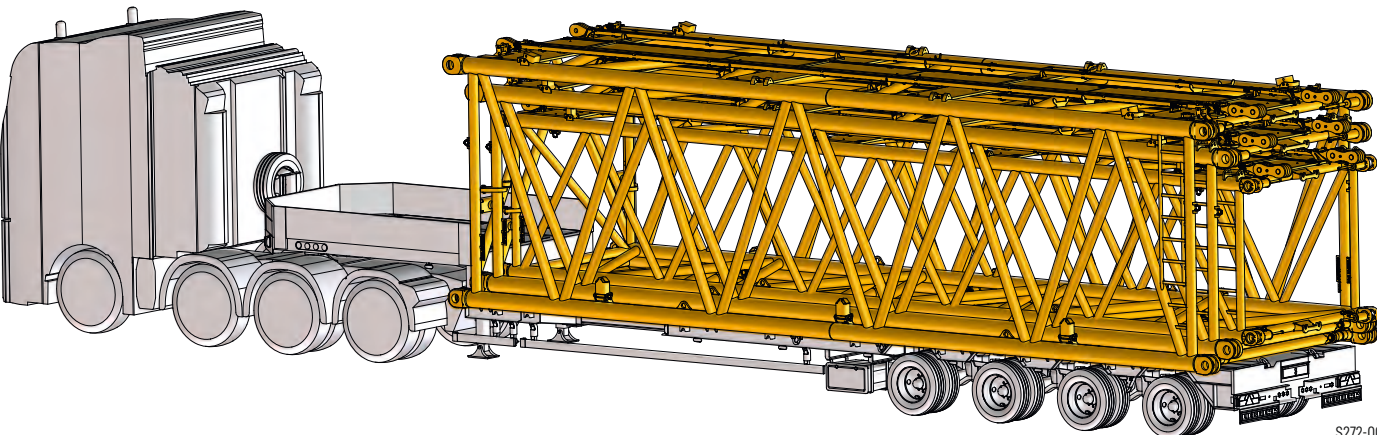

S272-0002-00

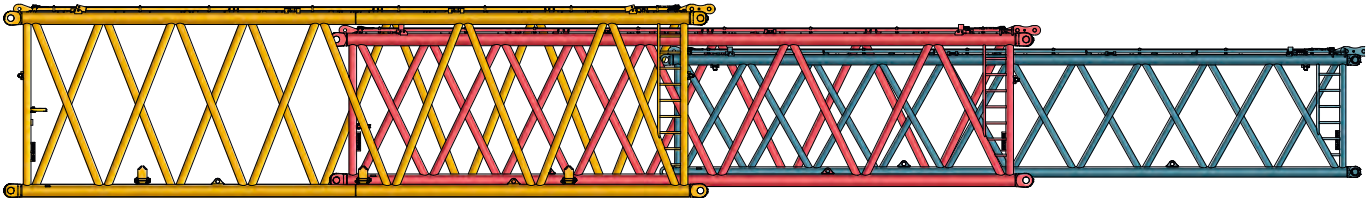


S272-0003-00

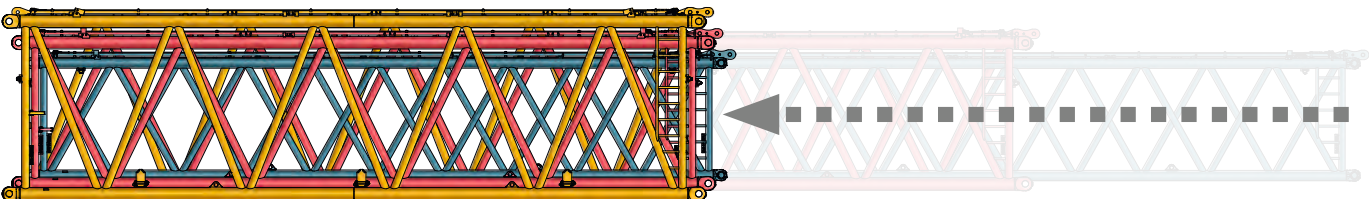


S272-0004-00

3x HSL 39 ft

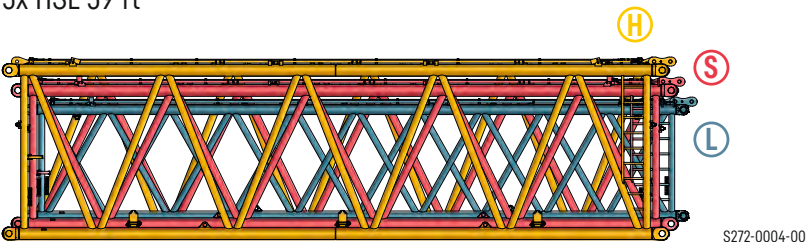


S272-0004-00

HSL 20 ft

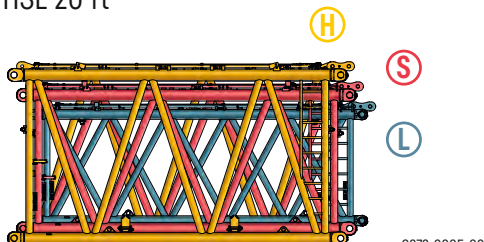

S272-0005-00

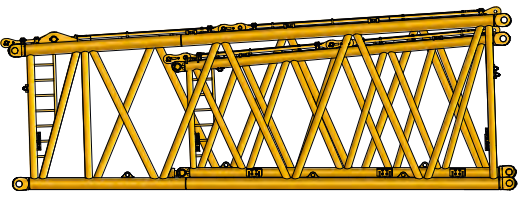

S272-0007-00

HS-reduction section incl. SL-reduction section
Elément réducteur HS incl. élément réducteur SL