


Ausladung und Hubhöhe • Radius and hoisting height • Portée et hauteur de levage
 Sbraccio e altezza di sollevamento • Alcance y altura de elevación • Alcance e altura de elevação
 Вылет и Высота подъема

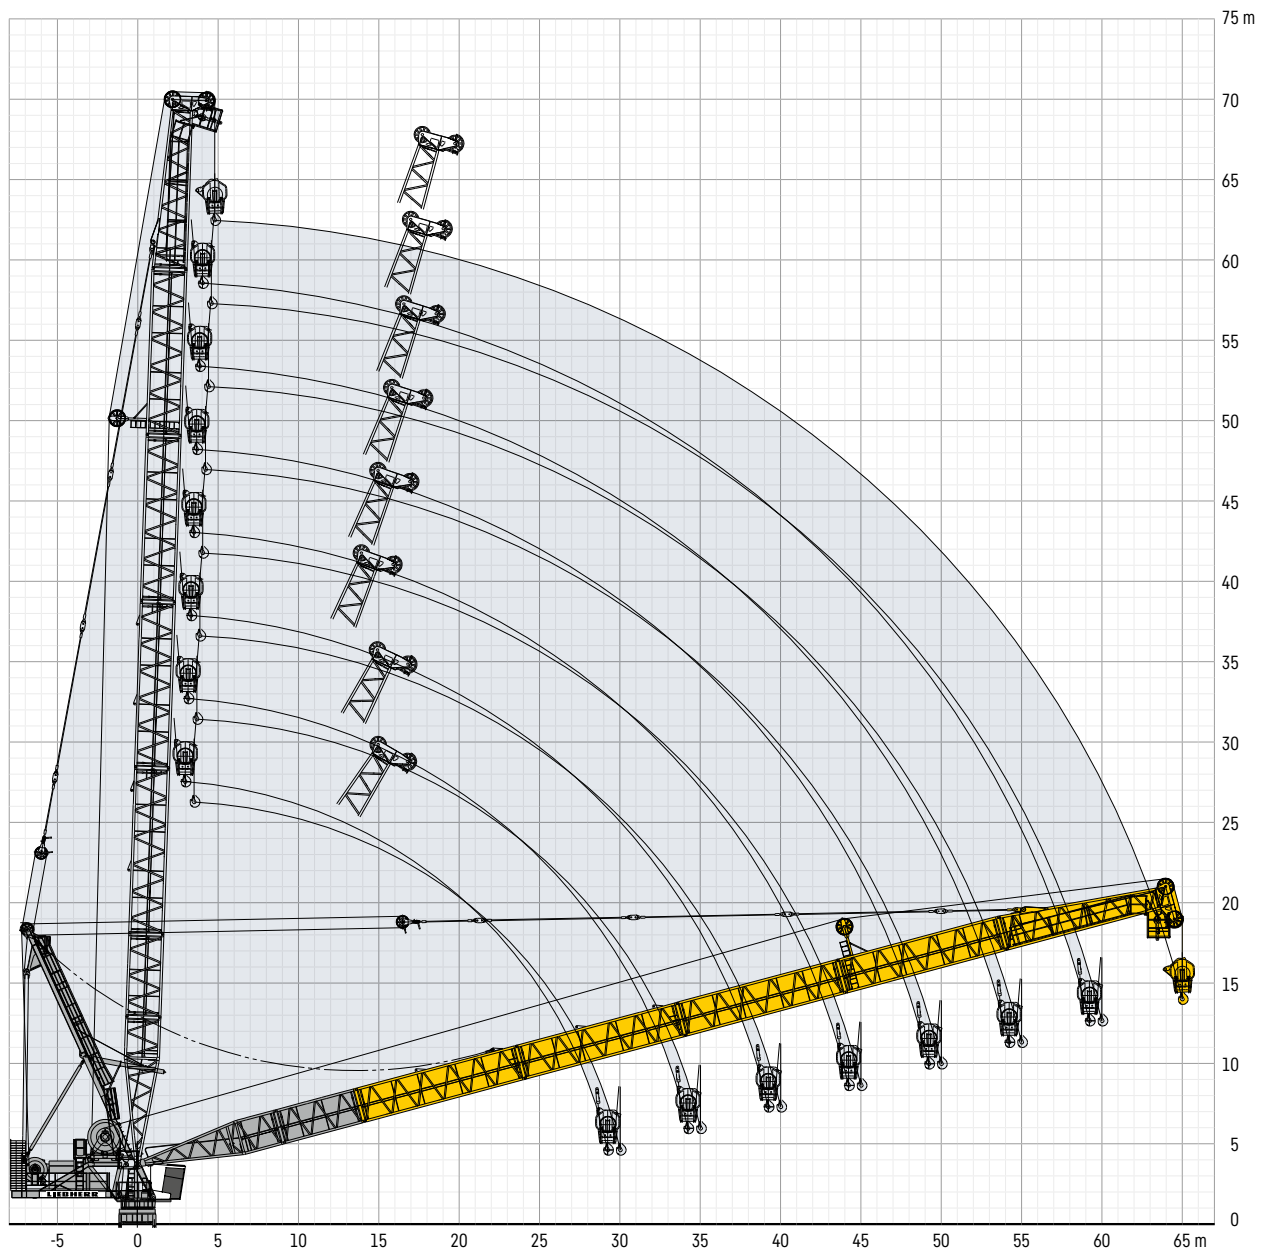

Minimum Ausladung außer Betrieb • Minimum radius out of operation • Portée minimum hors service • Sbraccio minimo fuori servizio • Alcance mínimo fuera de servicio • Alcance mínimo fora de operação • Минимальный вылет вне работы

Ausleger (m) • Jib • Flèche
 Braccio • Pluma • Lança • Стрела

Außerbetriebsstellung (α°) • Out-of-operation position • Position hors service • Posizione fuori servizio
 Posición externa de la empresa • Posição fora de operação • Положение вне работы

 24 HC 1000	α	l (m)	h (m)
65	75°	19,6	-
60	74°	19,3	18,6
55	73°	18,8	18,1
50	72°	18,1	17,4
45	71°	17,2	16,6
40	70°	16,2	15,5
35	65°	17,2	16,5
30	60°	17,3	16,8

Ausladung und Tragfähigkeit • Radius and capacity • Portée et charge • Sbraccio e portata
Alcances y cargas • Alcance e capacidade de carga • Вылет и грузоподъемность

m			t	m									
				20,0	25,0	30,0	35,0	40,0	45,0	50,0	55,0	60,0	65,0
65,0		4,8 - 24,0	32	32,00	30,53	24,59	20,24	16,89	14,22	12,03	10,19	8,61	7,20
60,0		4,6 - 26,0	32	32,00		27,01	22,26	18,61	15,70	13,30	11,29	9,50	
		4,1 - 17,0	48	40,08	30,89	24,56	19,90	16,29	13,41	11,03	9,02	7,50	
55,0		4,5 - 27,7	32	32,00		29,09	24,00	20,08	16,94	14,36	12,10		
		3,9 - 16,3	54	43,12	33,30	26,53	21,54	17,68	14,58	12,02	10,10		
50,0		4,3 - 29,3	32	32,00		31,09	25,62	21,40	18,00	15,10			
		3,7 - 15,6	60	45,75	35,36	28,21	22,92	18,83	15,53	13,10			
45,0		4,1 - 30,7	32	32,00			27,02	22,43	18,65				
		3,6 - 15,4	64	48,13	37,19	29,65	24,07	19,73	16,60				
40,0		3,9 - 31,8	32	32,00			28,05	22,85					
		3,4 - 15,9	64	49,81	38,50	30,68	24,86	20,80					
35,0		3,7 - 32,7	32	32,00			27,90						
		3,2 - 16,4	64	51,24	39,28	30,97	25,40						
30,0		3,6 - 30,0	32	32,00									
		3,0 - 16,4	65	50,76	38,28	30,40							

Tragfähigkeiten gültig bis 100 m Hubhöhe. Über 100 m Hubhöhe reduziert sich die Tragfähigkeit um das zusätzliche Seilgewicht. • Lifting capacities valid up to 100 m hoisting height. Over 100 m hoisting height, the lifting capacity is reduced by the additional rope weight. • Capacités de levage valables jusqu'à 100 m de hauteur sous crochet. Au-dessus de 100 m de hauteur sous crochet, la capacité de levage est réduite du poids de câble supplémentaire. • Portate valide fino a 100 m d'altezza di sollevamento. Oltre i 100 m si riduce la portata causa il peso addizionale della fune. • Cargas válidas hasta altura de 100 m. Por encima de los 100 m se reduce la carga por el peso adicional del cable. • Cargas válidas até à altura de 100 m. Para além dos 100 m, reduz-se a carga pelo peso adicional do cabo. • Грузоподъемность действительна до 100 м высоты подъема. Свыше 100 м высоты подъема грузоподъемность сокращается на вес дополнительного каната.