
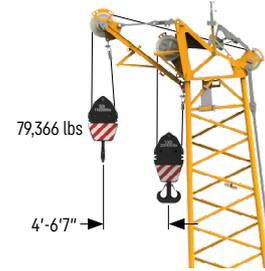


Main boom 2018.xx

Boom lengths 66-287 ft

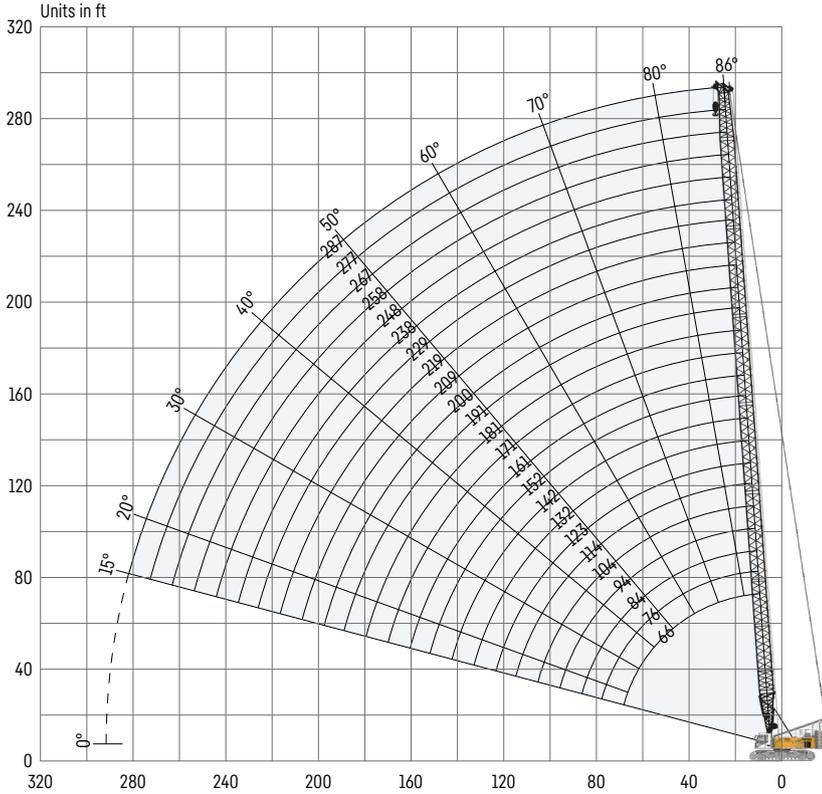

Auxiliary jib 79,366 lbs (option)

The maximum capacity of the auxiliary jib is 79,366 lbs. The corresponding load chart is programmed in the LML system.

Main boom configuration 2018.xx

Boom section	Amount of boom sections											
	1	1	1	1	1	1	1	1	1	1	1	1
Boom foot 23 ft	1	1	1	1	1	1	1	1	1	1	1	1
Boom section 10 ft		1		1		1		1		1		1
Boom section 20 ft	1	1			1	1			1	1		
Boom section 38 ft			1	1	1	1	2	2	2	2	3	3
Boom head 23 ft	1	1	1	1	1	1	1	1	1	1	1	1
Boom length [ft]	66	76	84	94	104	114	123	132	142	152	161	171
Auxiliary jib	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Boom foot 23 ft	1	1	1	1	1	1	1	1	1	1	1	1
Boom section 10 ft		1		1		1		1		1		1
Boom section 20 ft	1	1			1	1			1	1	2	2
Boom section 38 ft	3	3	4	4	4	4	5	5	5	5	5	5
Boom head 23 ft	1	1	1	1	1	1	1	1	1	1	1	1
Boom length [ft]	181	191	200	209	219	229	238	248	258	267	277	287
Auxiliary jib	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Actual lengths of boom sections are metric (e.g. 3 m, 6 m). The figures shown above are approximate conversions to feet.

Load capacities with main boom

Load capacities in 1000 lbs with 137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Radius [ft]	Boom length [ft]											
	66	94	114	132	152	171	191	209	229	248	267	287
14.7		352.7*										
20	301.5	292.1	278.7	244.6	205.0							
30	201.4	201.7	201.6	193.8	176.8	160.1	133.5	106.5	89.6	76.3	63.2	53.1
50	97.4	97.5	97.2	97.0	96.6	96.2	95.8	92.2	80.1	70.8	57.8	48.8
55	85.8	85.8	85.5	85.3	84.8	84.5	84.0	83.6	76.5	70.0	56.7	47.6
65	68.6	68.8	68.5	68.3	67.8	67.4	66.9	66.4	65.9	63.1	53.5	45.5
70	26.6	62.4	62.1	61.9	61.4	61.0	60.5	60.0	59.5	59.0	51.7	44.1
80		52.3	52.1	51.8	51.3	50.9	50.3	49.9	49.3	48.8	48.2	41.6
85		48.3	48.0	47.7	47.3	46.8	46.3	45.8	45.2	44.7	44.1	40.6
95		41.5	41.3	41.1	40.6	40.2	39.6	39.1	38.5	38.0	37.4	36.8
100			38.5	38.3	37.8	37.4	36.8	36.3	35.7	35.2	34.6	34.0
110			33.7	33.5	33.1	32.6	32.1	31.6	31.0	30.4	29.8	29.2
115			31.6	31.5	31.0	30.6	30.0	29.5	28.9	28.4	27.8	27.1
125				27.9	27.5	27.0	26.6	26.1	25.5	25.0	24.3	23.7
130				26.4	26.0	25.6	25.0	24.5	23.9	23.4	22.8	22.1
140					23.2	22.8	22.3	21.8	21.2	20.6	20.0	19.4
145					21.9	21.6	21.0	20.5	19.9	19.4	18.8	18.1
155						19.3	18.8	18.3	17.7	17.2	16.6	15.9
160						18.3	17.8	17.3	16.7	16.2	15.6	14.9
170						16.5	16.0	15.5	14.9	14.4	13.7	13.1
175							15.1	14.7	14.1	13.6	12.9	12.3
185							13.6	13.2	12.6	12.0	11.4	10.7
190							12.9	12.5	11.9	11.3	10.7	10.1
200								11.1	10.6	10.1	9.4	8.8
205								10.5	10.0	9.5	8.8	8.2
215									8.9	8.4	7.7	7.1
220									8.3	7.8	7.2	6.6
230										6.9	6.3	5.6
235										6.4	5.8	5.2
245										5.5	5.0	4.3
250											4.6	3.9
260											3.8	3.2
265											3.4	2.8
275												2.1

* Load capacities over 302,000 lbs require a special heavy duty boom head.

TLT 11962422. Above load charts are for reference only. For actual lift duty please refer to load chart in operator's cabin or manual. Otherwise we recommend you to plan your lifting job using Crane Planner 2.0.





www.liebherr.com/CranePlanner

Crane Planner 2.0

Luffing jib 1309.xx

Jib lengths 74-258 ft

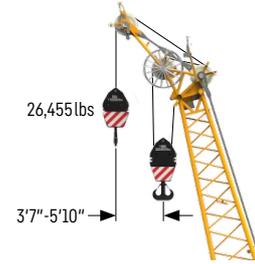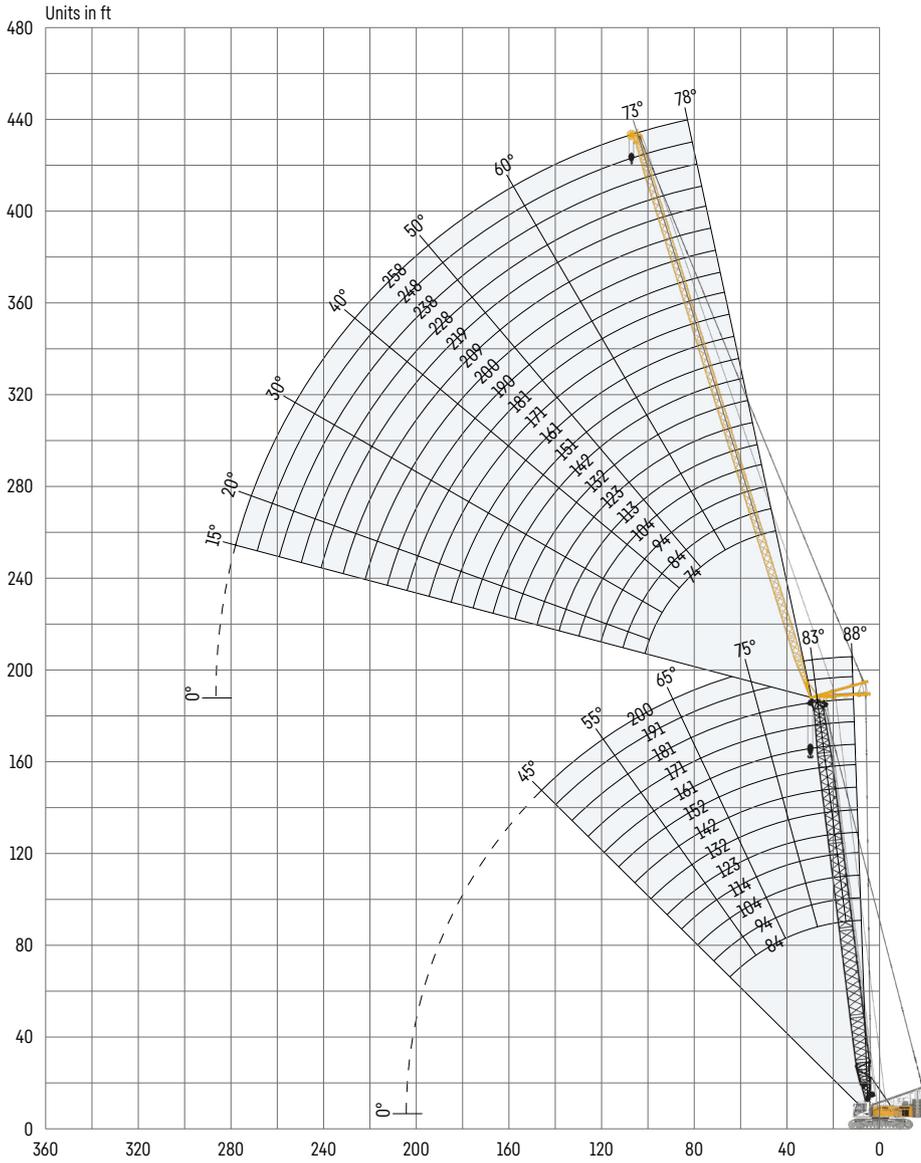

Auxiliary jib 26,455 lbs (option)
 The maximum capacity of the auxiliary jib is 26,455 lbs.

Jib configuration 1309.xx

Jib section	Amount of jib sections																			
Jib foot 18 ft	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Jib section 10 ft		1		1		1		1		1		1		1		1		1		1
Jib section 20 ft			1	1			1	1			1	1			1	1			1	1
Jib section 38 ft	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5
Jib head 18 ft	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Jib length [ft]	74	84	94	104	113	123	132	142	151	161	171	181	190	200	209	219	228	238	248	258
Auxiliary jib	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Actual lengths of boom sections are metric (e.g. 3 m, 6 m). The figures shown above are approximate conversions to feet.
 For main boom configuration please refer to the table on page 18.

Load capacities with luffing jib

Load capacities in 1000 lbs with 84 ft main boom 88°

Radius [ft]	Jib length [ft]					
	74	132	181	209	238	258
28.1	104.8					
50	84.2	54.7				
55	73.9	53.5	29.3			
60	66.4	52.6	28.5	20.6		
65	60.2	49.7	27.7	20.0	14.2	
70	55.0	47.4	27.0	19.6	13.8	10.5
80	46.1	42.7	25.9	18.6	13.0	9.7
140		21.9	19.3	14.9	10.1	6.9
185			13.7	13.1	8.8	5.7
210				10.4	8.2	5.3
240					6.5	4.9
260						4.6

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 132 ft main boom 88°

Radius [ft]	Jib length [ft]					
	74	132	181	209	238	258
29.8	94.0					
50	78.2	45.9				
55	71.8	45.1	26.8			
60	66.8	44.5	26.2	18.8		
65	61.9	43.3	25.7	18.4	12.6	
70	56.9	41.9	25.1	18.1	12.5	9.6
85	26.6	37.4	23.6	17.0	11.6	9.0
140		22.6	18.9	14.1	9.6	6.6
185			14.1	12.9	8.4	5.5
215				10.2	7.7	5.0
240					6.6	4.8
260						4.6

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 181 ft main boom 88°

Radius [ft]	Jib length [ft]					
	74	132	181	209	238	258
31.5	64.1					
50	56.4	35.3				
55	53.5	34.7	22.3			
60	50.8	33.8	22.1	16.3		
70	46.4	32.2	21.5	15.9	9.7	7.9
85	42.0	30.1	20.4	15.1	9.1	7.3
110		26.7	18.8	13.9	8.2	6.1
140		20.5	16.5	12.7	7.4	5.7
190			12.2	11.5	4.8	4.7
215				9.4	3.2	4.4
245					3.0	4.1
260						4.0

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 191 ft main boom 88°

Radius [ft]	Jib length [ft]					
	74	113	132	171	200	219
31.9	58.9					
40	56.4	40.9				
50	52.4	39.4	33.3			
55	50.0	38.4	32.7	23.4		
60	47.5	37.4	31.9	23.0	14.8	
65	45.6	36.3	31.3	22.7	14.5	11.8
85	39.5	32.6	28.4	21.1	13.4	10.8
125		26.6	23.7	18.2	11.5	9.4
140			21.8	17.2	11.0	8.9
180				14.9	9.7	8.0
205					9.1	7.5
225						7.2

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 200 ft main boom 88°

Radius [ft]	Jib length [ft]					
	74	94	113	132	151	161
32.2	54.1					
40	52.7	44.6				
50	49.1	42.0	36.5	27.3	23.7	
55	47.1	40.9	35.7	26.6	22.9	21.0
70	41.1	37.2	33.1	24.7	21.2	19.3
85	37.5	33.4	30.4	23.0	19.8	18.1
95		30.7	28.8	21.9	19.0	17.5
105		26.3	27.2	21.0	18.2	16.7
125			20.8	19.0	16.7	15.4
140				17.9	15.6	14.4
160					14.5	13.4
170						13.0

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

TLT 11962422. Above load charts are for reference only. For actual lift duty please refer to load chart in operator's cabin or manual. Otherwise we recommend you to plan your lifting job using Crane Planner 2.0.



www.liebherr.com/CranePlanner

Crane Planner 2.0

Load capacities with luffing jib

Load capacities in 1000 lbs with 84 ft main boom 83°

Radius [ft]	Jib length [ft]					
	74	132	181	209	238	258
41.9	104.9					
60	78.9	54.1				
75	57.7	49.2	27.3			
85	48.9	44.6	26.1	18.8		
90	44.6	41.4	25.5	18.4	12.7	
100		36.3	24.3	17.7	12.3	9.0
120		28.9	22.4	16.4	11.2	8.0
145		22.9	19.8	15.0	10.2	7.0
190			14.2	13.4	8.9	5.7
220				10.1	8.1	5.2
245					6.8	4.9
265						4.8

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 132 ft main boom 83°

Radius [ft]	Jib length [ft]					
	74	132	181	209	238	258
47.8	90.1					
65	71.4	45.9				
80	55.4	43.2	24.9			
90	48.0	40.5	24.2	17.3		
100		36.8	23.3	16.7	11.5	
105		35.4	22.8	16.4	11.3	8.5
125		29.3	21.2	15.3	10.5	7.6
150		23.4	19.3	14.2	9.6	6.7
200			13.9	12.7	8.4	5.4
225				10.4	7.9	5.0
255					6.6	4.8
270						4.7

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 181 ft main boom 83°

Radius [ft]	Jib length [ft]					
	74	132	181	209	238	258
53.7	59.9					
75	50.3	34.7				
85	46.6	33.5	21.2			
95	43.7	32.1	20.8	15.2		
105		30.3	20.2	14.8	9.2	
110		29.6	19.9	14.6	9.0	6.9
130		26.8	18.8	13.7	8.3	6.5
155		22.0	17.1	12.8	7.7	5.9
205			13.1	11.7	6.3	4.8
230				10.1	5.6	4.3
260					5.1	4.0
280						4.0

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 191 ft main boom 83°

Radius [ft]	Jib length [ft]					
	74	132	171	190	200	219
54.9	54.7					
75	46.3	32.5				
85	43.1	31.1	22.1			
90	41.8	30.2	21.9	18.2		
95	40.6	29.5	21.6	18.1	14.3	
100	39.3	28.7	21.2	17.9	14.0	11.3
125		25.6	19.6	16.9	12.7	10.3
160		21.8	17.5	15.1	11.6	9.3
195			15.2	13.3	10.7	8.6
215				12.0	10.3	8.2
225					10.2	8.1
240						8.0

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 200 ft main boom 83°

Radius [ft]	Jib length [ft]					
	74	94	113	132	151	161
55.9	50.3					
65	47.1	42.1				
70	45.3	40.8	36.2			
75	43.1	39.1	35.1	27.1		
80	41.5	37.8	34.0	26.6	22.6	
85	40.0	36.3	32.9	26.0	22.2	20.3
105	26.6	32.1	29.2	23.7	20.6	18.7
120		28.6	27.0	22.2	19.4	17.8
140			23.9	20.2	18.0	16.6
160				18.6	16.7	15.4
180					15.5	14.5
185						14.2

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

TLT 11962422. Above load charts are for reference only. For actual lift duty please refer to load chart in operator's cabin or manual. Otherwise we recommend you to plan your lifting job using Crane Planner 2.0.



www.liebherr.com/CranePlanner

Crane Planner 2.0

Load capacities with luffing jib

Load capacities in 1000 lbs with 84 ft main boom 75°

Radius [ft]	Jib length [ft]					
	74	132	181	209	238	258
63.2	53.0					
90	46.9	45.7				
110		35.7	24.2			
125		30.5	22.8	16.6		
135		27.3	21.9	15.9	10.9	
145		25.4	21.1	15.4	10.6	7.3
155		23.3	19.9	14.9	10.2	6.9
180			16.9	13.9	9.4	6.2
205			13.8	12.8	8.8	5.6
230				10.4	8.2	5.2
260					6.8	5.0
280						4.9

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 132 ft main boom 75°

Radius [ft]	Jib length [ft]					
	74	132	181	209	238	258
75.6	53.0					
105	36.9	35.5				
125		28.6	22.2			
135		26.0	21.5	15.3		
145		23.8	20.9	15.0	10.1	
155		21.8	20.3	14.5	9.9	6.9
170		19.3	18.3	13.9	9.4	6.5
190			15.6	13.4	8.9	5.9
215			13.0	12.4	8.5	5.4
245				10.0	7.9	5.0
270					6.9	4.8
290						4.7

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 181 ft main boom 75°

Radius [ft]	Jib length [ft]					
	74	132	181	209	238	258
88.1	42.4					
115	30.7	29.2				
135		23.9	18.7			
150		20.9	18.2	13.4		
160		19.2	17.7	13.2	8.2	
170		17.7	16.5	12.9	8.1	6.1
180		16.3	15.2	12.6	7.8	5.9
200			13.0	12.1	7.4	5.4
230			10.5	9.9	7.0	4.9
255				8.2	6.6	4.5
285					5.8	4.3
305						4.3

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 191 ft main boom 75°

Radius [ft]	Jib length [ft]					
	74	132	151	181	209	219
90.7	40.3					
120	28.6	26.0				
125	27.2	25.4	22.2			
140		22.3	21.4	17.0		
150		20.4	20.0	16.6	11.7	
155		19.6	19.1	16.3	11.7	10.3
170		17.3	16.9	15.5	11.2	10.0
185		15.4	15.0	14.3	10.8	9.6
205			12.9	12.2	10.2	9.2
230				10.2	9.4	8.5
260					7.7	7.4
270						6.9

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 200 ft main boom 75°

Radius [ft]	Jib length [ft]					
	74	104	132	142	151	161
93	37.5					
110	31.3	29.5				
120	28.2	27.4	21.5			
125	26.8	26.0	21.4	19.8		
130	25.5	24.8	20.7	19.6	18.5	16.9
140		22.6	19.7	18.7	17.8	16.5
150		20.7	18.8	17.8	17.0	15.9
160		19.0	17.8	17.0	16.3	15.2
185			15.1	14.8	14.6	13.7
195				13.8	13.6	13.2
205					12.6	12.4
215						11.5

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

TLT 11962422. Above load charts are for reference only. For actual lift duty please refer to load chart in operator's cabin or manual. Otherwise we recommend you to plan your lifting job using Crane Planner 2.0.



www.liebherr.com/CranePlanner

Crane Planner 2.0

Load capacities with luffing jib

Load capacities in 1000 lbs with 84 ft main boom 65°

Radius [ft]	Jib length [ft]					
	74	132	181	209	238	258
88	45.7					
125		28.6				
150		22.7	21.3			
170		19.3	18.2	14.6		
185			16.2	14.0	9.4	
195			15.0	13.6	9.2	6.0
205			14.0	13.2	8.9	5.8
220			12.5	12.0	8.7	5.5
230				11.2	8.5	5.3
245				10.0	8.2	5.1
275					7.0	4.9
290						4.9

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 132 ft main boom 65°

Radius [ft]	Jib length [ft]					
	74	132	181	209	238	258
108.4	32.0					
145		21.0				
170		17.0	15.7			
190		14.6	13.4	12.7		
205			11.9	11.3	8.7	
215			11.1	10.4	8.5	5.5
230			9.9	9.3	8.2	5.3
240			9.2	8.6	7.9	5.2
255				7.7	7.0	5.0
265				7.2	6.5	4.8
295					5.1	4.6
310						4.0

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 171 ft main boom 65°

Radius [ft]	Jib length [ft]					
	74	132	181	209	238	258
124.6	24.1					
160		16.1				
190		12.6	11.3			
205		11.3	10.0	9.3		
220			8.9	8.2	7.1	
230			8.2	7.5	6.5	5.1
240			7.6	7.0	5.9	5.1
255			6.8	6.2	5.2	4.4
265				5.7	4.8	4.0
280				5.0	4.2	3.4
310					3.2	2.4
325						2.0

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 181 ft main boom 65°

Radius [ft]	Jib length [ft]					
	74	132	181	209	238	258
128.8	22.4					
165		14.8				
190		12.1	10.7			
210		10.4	9.1	8.2		
225			8.1	7.3	6.0	
235			7.5	6.7	5.5	4.6
245			6.9	6.2	5.0	4.2
260			6.1	5.5	4.4	3.5
270				5.0	4.0	3.1
285				4.4	3.4	2.6
305					2.8	2.0
315					2.6	

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 191 ft main boom 65°

Radius [ft]	Jib length [ft]					
	74	132	161	190	209	219
132.9	20.7					
150	17.7					
170		13.5				
185		11.9	11.1			
200		10.6	9.8	9.0		
215		9.5	8.7	8.0	7.1	
220			8.4	7.7	6.8	6.3
235			7.5	6.8	6.0	5.5
245			6.9	6.3	5.5	5.1
270				5.1	4.5	4.1
290					3.8	3.4
300						3.1

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

TLT 11962422. Above load charts are for reference only. For actual lift duty please refer to load chart in operator's cabin or manual. Otherwise we recommend you to plan your lifting job using Crane Planner 2.0.





www.liebherr.com/CranePlanner

Crane Planner 2.0

Luffing jib 1713.xx

Jib lengths 66-272 ft

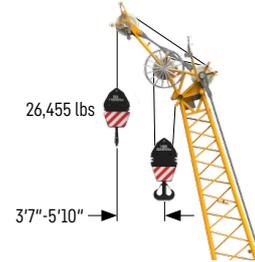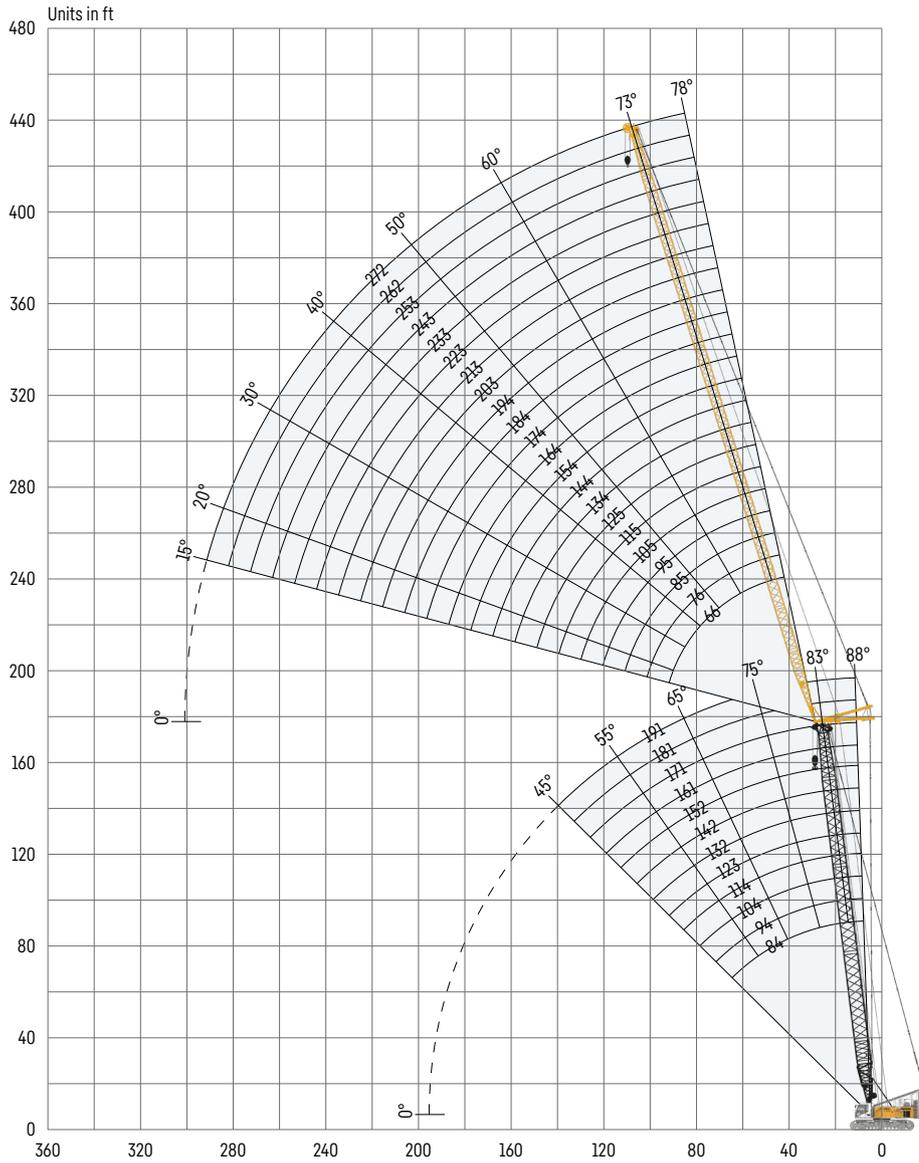

Auxiliary jib 26,455 lbs (option)
The maximum capacity of the auxiliary jib is 26,455 lbs.

Jib configuration 1713.xx

Jib section	Amount of jib sections																						
Jib foot 23 ft	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1			
Jib section 10 ft		1		1		1		1		1		1		1		1		1		1			
Jib section 20 ft	1	1			1	1			1	1			1	1			1	1		1			
Jib section 40 ft			1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	
Jib head 23 ft	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Jib length [ft]	66	76	85	95	105	115	125	134	144	154	164	174	184	194	203	213	223	233	243	253	262	272	
Auxiliary jib	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Actual lengths of boom sections are metric (e.g. 3 m, 6 m). The figures shown above are approximate conversions to feet.
For main boom configuration please refer to the table on page 18.

Load capacities with luffing jib

Load capacities in 1000 lbs with 84 ft main boom 88°

Radius [ft]	Jib length [ft]					
	66	115	154	194	233	272
26.3	130.5					
40	110.1	91.5				
50	84.3	78.7	61.8			
55	76.0	71.9	60.8	41.6		
65	61.4	57.3	53.4	40.1	27.1	
70	55.1	53.0	50.4	39.3	26.6	17.8
95		35.9	33.9	31.4	23.7	15.9
120		26.6	26.5	23.2	20.6	14.2
160			17.1	15.9	14.3	11.3
195				11.2	9.9	8.5
235					6.1	5.0
275						2.3

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 123 ft main boom 88°

Radius [ft]	Jib length [ft]					
	66	115	154	194	233	272
27.6	120.0					
40	100.6	74.9				
50	83.6	69.0	49.8			
55	78.4	66.3	48.9	34.4		
65	63.6	57.3	47.1	33.8	23.8	
75	51.4	49.2	43.9	32.7	23.1	16.0
95		36.9	34.9	29.7	21.7	14.9
120		27.1	26.6	24.8	19.7	13.4
160			17.6	16.3	14.4	11.0
200				10.7	9.4	8.4
235					6.4	5.3
275						2.5

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 142 ft main boom 88°

Radius [ft]	Jib length [ft]					
	66	115	154	194	233	272
28.3	103.5					
40	88.0	63.8				
50	76.3	60.7	43.5			
60	67.1	56.0	42.0	30.7		
65	62.9	53.2	41.0	30.2	21.7	
75	52.5	47.6	39.3	29.2	21.3	14.9
95		37.3	34.4	27.2	20.0	14.0
125		25.8	25.6	22.2	18.3	12.5
160			17.8	16.4	14.1	10.7
200				10.8	9.7	8.5
235					6.4	5.4
275						2.7

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 171 ft main boom 88°

Radius [ft]	Jib length [ft]					
	66	115	154	194	233	272
29.3	78.7					
40	71.6	50.3				
50	62.7	48.3	35.7			
60	56.1	45.1	34.5	25.9		
65	53.2	42.9	33.6	25.5	15.3	
75	48.6	39.4	32.2	24.6	14.9	10.6
95		33.4	29.0	22.8	13.8	9.7
125		26.1	23.7	20.0	12.5	8.8
160			17.7	15.9	11.1	7.8
200				11.2	8.8	6.5
240					5.7	4.4
275						2.3

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 191 ft main boom 88°

Radius [ft]	Jib length [ft]					
	66	95	115	134	154	164
30	65.9					
40	61.9	49.8				
50	54.7	46.8	41.1	36.0	27.2	
55	51.6	44.3	39.8	35.3	26.3	24.8
65	46.5	40.3	36.6	33.5	24.7	23.3
75	42.9	36.7	33.7	30.6	23.5	22.1
90		32.5	30.0	27.4	21.9	20.6
105		30.2	27.1	25.0	20.1	19.1
125			24.7	22.3	18.2	17.3
145				20.1	16.4	15.7
165					11.3	14.4
170						14.1

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

TLT 11962422. Above load charts are for reference only. For actual lift duty please refer to load chart in operator's cabin or manual. Otherwise we recommend you to plan your lifting job using Crane Planner 2.0.



www.liebherr.com/CranePlanner

Crane Planner 2.0

Load capacities with luffing jib

Load capacities in 1000 lbs with 84 ft main boom 83°

Radius [ft]	Jib length [ft]					
	66	115	154	194	233	272
39.3	130.5					
55	89.2	82.0				
70	64.5	59.9	57.2			
80	53.1	50.7	48.4	38.6		
90		42.6	40.7	36.5	24.8	
100		37.1	35.2	32.6	23.9	15.7
115		30.9	28.7	26.9	22.2	14.9
130		26.6	25.8	22.5	20.5	14.0
165			17.8	16.4	14.6	11.6
205				10.9	9.7	8.3
240					6.4	5.3
280						2.5

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 123 ft main boom 83°

Radius [ft]	Jib length [ft]					
	66	115	154	194	233	272
44	108.0					
60	78.7	70.7				
70	65.0	63.9	49.6			
85	51.2	50.2	47.4	33.8		
95		42.6	40.5	32.9	22.2	
105		37.2	35.3	30.8	21.9	14.6
120		31.1	28.8	27.0	20.7	13.9
135		26.6	25.8	23.5	19.4	13.1
170			17.9	16.4	14.6	11.1
210				10.9	9.8	8.4
245					6.6	5.2
285						2.6

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 142 ft main boom 83°

Radius [ft]	Jib length [ft]					
	66	115	154	194	233	272
46.4	92.0					
65	70.6	60.4				
75	59.2	55.4	42.9			
85	50.7	49.7	41.7	30.3		
100		40.7	38.0	29.4	20.7	
110		36.1	33.7	28.2	20.2	13.7
125		30.3	28.0	26.0	19.3	13.1
135		26.6	26.4	23.0	18.7	12.6
175			17.4	15.5	14.3	10.6
210				10.9	9.8	8.8
250					6.3	5.3
290						2.4

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 171 ft main boom 83°

Radius [ft]	Jib length [ft]					
	66	115	154	194	233	272
49.9	70.5					
65	60.8	46.3				
80	52.7	41.6	34.4			
90	46.5	38.7	32.8	25.2		
100		36.0	31.0	24.4	15.0	
115		32.2	28.3	22.9	14.3	10.0
125		30.1	26.5	22.1	13.9	9.6
140		25.8	23.8	20.3	13.3	9.2
175			18.0	16.0	11.9	8.2
215				10.9	9.0	6.9
255					5.8	4.6
290						2.3

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 191 ft main boom 83°

Radius [ft]	Jib length [ft]					
	66	95	115	134	154	164
52.3	58.2					
65	51.8	44.4				
70	48.9	42.6	38.4			
75	46.8	40.5	36.8	33.1		
80	44.9	39.0	35.4	32.1	25.6	
85	43.3	37.2	34.0	31.1	25.2	23.8
95	40.4	34.6	31.6	28.9	23.8	22.6
120		29.8	27.1	24.8	20.6	19.8
140			24.5	22.3	18.7	17.8
160				20.3	17.0	16.2
180					13.6	14.9
190						12.6

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

TLT 11962422. Above load charts are for reference only. For actual lift duty please refer to load chart in operator's cabin or manual. Otherwise we recommend you to plan your lifting job using Crane Planner 2.0.



www.liebherr.com/CranePlanner

Crane Planner 2.0

Load capacities with luffing jib

Load capacities in 1000 lbs with 84 ft main boom 75°

Radius [ft]	Jib length [ft]					
	66	115	154	194	233	272
59.4	53.0					
85	49.8	48.6				
100		39.8	38.7			
115		33.4	32.5	30.0		
135		27.3	26.4	25.5	21.1	
150			23.0	21.5	19.1	13.3
160			20.9	19.4	17.6	13.2
170			19.0	17.3	15.6	12.6
180			17.0	15.4	14.2	11.8
215				11.0	9.4	8.1
255					6.1	4.7
290						2.7

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 123 ft main boom 75°

Radius [ft]	Jib length [ft]					
	66	115	154	194	233	272
69.4	53.0					
95	41.6	40.3				
110		33.6	32.5			
125		28.6	27.5	26.5		
145		23.6	22.7	21.7	19.7	
160			19.9	18.9	17.8	12.4
175			17.5	16.6	15.5	12.0
190			15.6	14.6	13.6	11.2
205				13.0	12.0	9.9
225				11.2	9.7	8.5
265					6.3	4.9
300						2.8

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 142 ft main boom 75°

Radius [ft]	Jib length [ft]					
	66	115	154	194	233	272
74.5	53.0					
100	38.1	36.7				
115		30.8	29.6			
130		26.4	25.3	24.2		
150		21.9	20.9	19.9	18.1	
165			18.4	17.3	16.2	11.8
180			16.2	15.2	14.2	11.5
195			14.4	13.5	12.4	10.9
215				11.5	10.5	9.2
230				10.2	9.3	8.1
270					6.4	5.0
305						2.9

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 171 ft main boom 75°

Radius [ft]	Jib length [ft]					
	66	115	154	194	233	272
81.8	46.6					
105	34.3	32.8				
120		27.7	26.5			
140		22.7	21.6	20.4		
155		19.9	18.8	17.7	12.8	
170			16.6	15.5	12.4	8.3
185			14.6	13.6	11.8	8.2
200			13.0	12.0	10.8	7.8
220				10.2	9.2	7.2
240				8.7	7.7	6.0
275					5.7	4.2
315						2.1

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 191 ft main boom 75°

Radius [ft]	Jib length [ft]					
	66	95	115	134	154	164
86.9	41.7					
100	35.2	33.8				
110	31.2	30.4	29.1			
120	28.0	27.2	26.6	25.2		
125		25.9	25.3	24.4	19.5	
130		24.6	24.0	23.4	19.3	18.1
140		22.4	21.8	21.2	18.3	17.4
150		20.4	19.9	19.4	17.3	16.6
170			16.7	16.3	15.6	15.0
185				14.4	13.9	13.8
205					11.8	11.7
215						10.8

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

TLT 11962422. Above load charts are for reference only. For actual lift duty please refer to load chart in operator's cabin or manual. Otherwise we recommend you to plan your lifting job using Crane Planner 2.0.



www.liebherr.com/CranePlanner

Crane Planner 2.0

Load capacities with luffing jib

Load capacities in 1000 lbs with 84 ft main boom 65°

Radius [ft]	Jib length [ft]					
	66	115	154	194	233	272
83	48.5					
115		31.2				
135		25.5	24.4			
155		21.3	20.4			
160			19.5	18.4		
180			16.5	15.5	14.4	
190			15.3	14.3	13.3	
205				12.7	11.7	10.4
220				11.3	10.3	9.1
230				10.5	9.2	8.0
270					6.0	4.5
305						2.6

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 123 ft main boom 65°

Radius [ft]	Jib length [ft]					
	66	115	154	194	233	272
99.2	35.9					
130		24.3				
150		20.1	19.0			
175			15.3	14.2		
190			13.5	12.4		
200			12.5	11.4	10.3	
210			11.6	10.5	9.4	
220				9.7	8.6	7.2
235				8.6	7.6	6.2
245				8.0	6.9	5.6
285					4.8	3.7
320						2.4

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 142 ft main boom 65°

Radius [ft]	Jib length [ft]					
	66	115	154	194	233	272
107.5	30.9					
140		20.7				
160		17.3	16.1			
185			13.0	11.9		
195			12.0	10.9		
205			11.1	10.0	8.8	
215			10.2	9.2	8.0	
230				8.1	7.0	5.2
245				7.2	6.1	4.3
255				6.6	5.5	3.8
295					3.6	2.2
300						2.0

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 171 ft main boom 65°

Radius [ft]	Jib length [ft]					
	66	115	154	194	233	272
119.6	24.7					
150		16.9				
175		13.6	12.4			
185		12.5	11.4			
195			10.4	9.2		
210			9.2	8.0		
220			8.5	7.4	5.5	
230			7.8	6.7	4.9	
240				6.2	4.4	2.5
250				5.6	3.9	2.1
265				4.9	3.3	
305					2.0	

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 191 ft main boom 65°

Radius [ft]	Jib length [ft]					
	66	95	115	134	154	164
127.9	21.0					
135	19.6					
145	17.9	16.8				
160		14.8	14.1			
170		13.5	12.9	12.3		
180		12.4	11.8	11.3	10.5	
185			11.3	10.8	10.1	9.9
200			10.0	9.5	8.9	8.7
210				8.8	8.1	8.0
220				8.1	7.5	7.3
235					6.6	6.4
245						5.9

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

TLT 11962422. Above load charts are for reference only. For actual lift duty please refer to load chart in operator's cabin or manual. Otherwise we recommend you to plan your lifting job using Crane Planner 2.0.




www.liebherr.com/CranePlanner

Crane Planner 2.0

Fixed jib 1008.xx

Jib lengths 36-85 ft

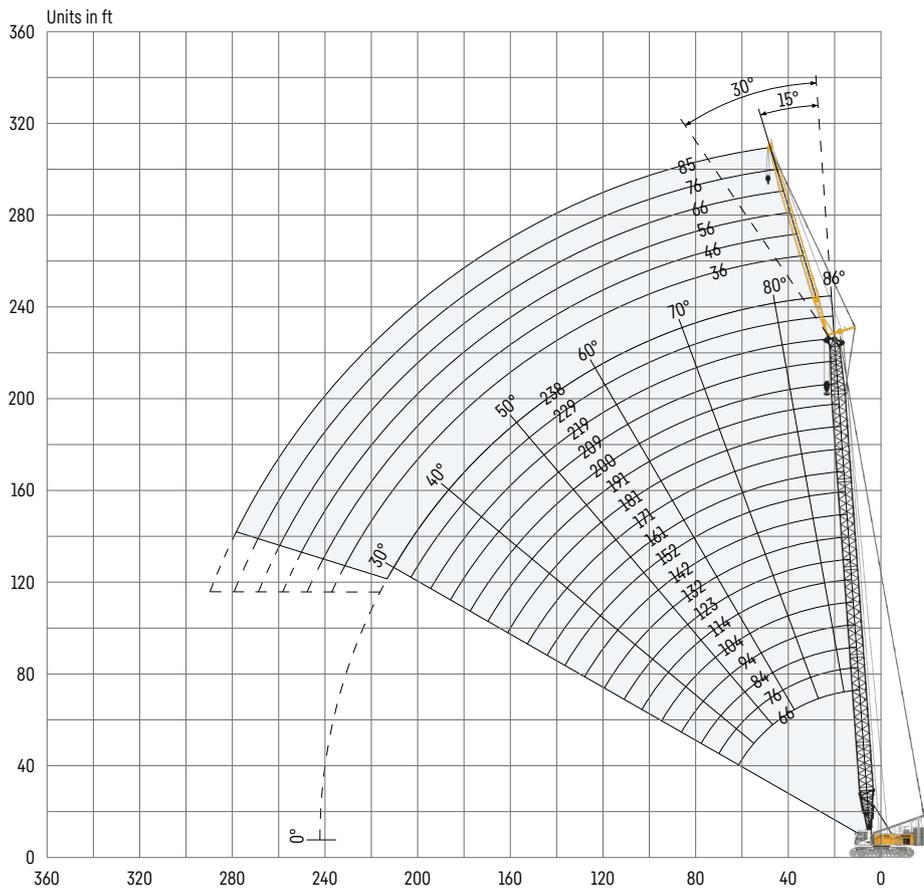

Jib configuration 1008.xx

Jib section	Amount of jib sections					
Jib foot 18 ft	1	1	1	1	1	1
Jib section 10 ft		1		1		1
Jib section 20 ft			1	1	2	2
Jib head 18 ft	1	1	1	1	1	1
Jib length [ft]	36	46	56	66	76	85

Actual lengths of boom sections are metric (e.g. 3 m, 6 m). The figures shown above are approximate conversions to feet.
For main boom configuration please refer to the table on page 18.

Load capacities with fixed jib 15°

Load capacities in 1000 lbs with 66 ft main boom

Radius [ft]	Jib length [ft]			
	36	46	66	85
18.6	79.1			
30	79.1	79.1		
40	79.1	69.6	52.8	42.7
55	76.2	57.3	43.6	35.4
65	69.6	56.2	38.7	31.8
75	57.6	53.8	37.2	28.5
85	48.9	49.4	36.8	26.9
95	42.1	42.6	34.3	26.6
100	39.3	39.8	32.8	26.6
110		34.8	30.3	25.7
125			27.4	22.9
145				20.1

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 132 ft main boom

Radius [ft]	Jib length [ft]			
	36	46	66	85
20.9	79.1			
30	79.1	79.1		
40	79.1	76.9	67.2	
50	79.1	73.3	62.6	45.5
70	61.5	62.0	52.8	40.0
90	43.7	44.1	44.9	34.7
110	32.9	33.2	33.9	30.2
130	25.6	25.9	26.5	26.6
155	19.2	19.5	20.1	20.5
165		17.5	18.1	18.5
185			14.7	15.1
205				12.3

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 171 ft main boom

Radius [ft]	Jib length [ft]			
	36	46	66	85
22.3	79.1			
30	79.1	75.7		
40	79.1	74.2	60.5	
50	79.1	71.8	58.0	42.8
75	55.0	55.5	49.4	38.5
105	34.0	34.4	35.2	32.7
135	23.0	23.3	24.0	24.5
165	16.2	16.5	17.0	17.4
190	12.2	12.4	12.9	13.3
200		11.1	11.5	11.9
220			9.2	9.6
240				7.6

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 200 ft main boom

Radius [ft]	Jib length [ft]			
	36	46	66	85
23.3	79.1			
30	79.1	71.3		
40	77.5	69.3	53.7	
50	74.8	66.5	52.3	39.7
85	45.5	46.0	43.8	35.0
115	28.9	29.2	30.0	30.6
150	18.4	18.7	19.3	19.8
185	12.1	12.3	12.8	13.2
215	8.3	8.5	8.9	9.3
225		7.4	7.9	8.2
245			6.0	6.3
265				4.7

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 229 ft main boom

Radius [ft]	Jib length [ft]			
	36	46	56	66
24.3	62.1			
30	61.5	54.7		
40	59.3	53.8	48.3	43.2
85	44.6	43.8	41.7	37.9
115	27.9	28.3	28.8	29.2
145	18.6	18.9	19.3	19.6
175	12.6	12.9	13.2	13.4
205	8.4	8.7	9.0	9.1
240	4.9	5.1	5.3	5.5
250		4.2	4.5	4.6
260			3.7	3.8
270				3.1

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

TLT 11962422. Above load charts are for reference only. For actual lift duty please refer to load chart in operator's cabin or manual. Otherwise we recommend you to plan your lifting job using Crane Planner 2.0.



www.liebherr.com/CranePlanner

Crane Planner 2.0

Load capacities with fixed jib 30°

Load capacities in 1000 lbs with 66 ft main boom

Radius [ft]	Jib length [ft]			
	36	46	66	85
27.3	70.2			
40	61.3	50.4		
50	55.8	45.8	33.9	
60	53.1	42.0	31.0	25.5
70	53.0	40.4	28.7	23.6
80	49.9	40.0	26.8	21.9
90	45.7	37.1	26.6	20.3
100	39.4	35.1	26.6	19.3
110		33.8	24.9	18.9
120			23.8	18.2
130			23.0	17.2
150				16.1

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 132 ft main boom

Radius [ft]	Jib length [ft]			
	36	46	66	85
29.7	79.1			
40	79.1	64.7		
50	74.0	61.3	42.2	
60	68.5	56.5	38.9	28.4
80	52.3	50.4	33.9	26.6
100	38.3	38.9	30.1	23.5
120	29.3	29.8	27.3	21.2
140	23.0	23.5	24.3	19.2
160	18.3	18.7	19.5	17.7
170		16.7	17.5	17.1
185			14.8	15.5
205				12.5

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 171 ft main boom

Radius [ft]	Jib length [ft]			
	36	46	66	85
31	78.4			
40	77.9	63.3		
50	72.2	60.1	40.6	
65	65.8	54.7	38.1	28.2
90	43.5	44.2	33.3	24.4
115	30.3	30.8	29.5	22.3
140	22.1	22.5	23.4	20.4
165	16.5	16.8	17.6	18.2
190	12.3	12.6	13.3	13.9
200		11.2	11.8	12.4
220			9.3	9.9
240				7.7

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 200 ft main boom

Radius [ft]	Jib length [ft]			
	36	46	66	85
32	71.4			
40	69.6	58.9		
55	64.1	54.3	40.3	
65	60.6	52.3	37.9	27.8
100	36.7	37.4	32.1	23.4
130	24.2	24.7	25.8	20.9
160	16.7	17.1	17.9	18.6
190	11.6	11.9	12.6	13.2
215	8.4	8.6	9.3	9.8
225		7.5	8.1	8.7
245			6.1	6.6
265				4.8

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 229 ft main boom

Radius [ft]	Jib length [ft]			
	36	46	56	66
33	56.3			
40	56.3	49.6		
50	54.8	48.5	42.5	
55	53.6	47.5	42.1	37.1
95	38.9	39.5	35.7	31.6
130	23.4	23.9	24.5	25.0
165	14.8	15.2	15.7	16.1
200	9.3	9.6	10.0	10.3
240	5.0	5.2	5.6	5.8
250		4.3	4.6	4.9
260			3.8	4.0
270				3.2

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

TLT 11962422. Above load charts are for reference only. For actual lift duty please refer to load chart in operator's cabin or manual. Otherwise we recommend you to plan your lifting job using Crane Planner 2.0.




www.liebherr.com/CranePlanner

Crane Planner 2.0

Fixed jib 0806.xx

Jib lengths 36-105 ft

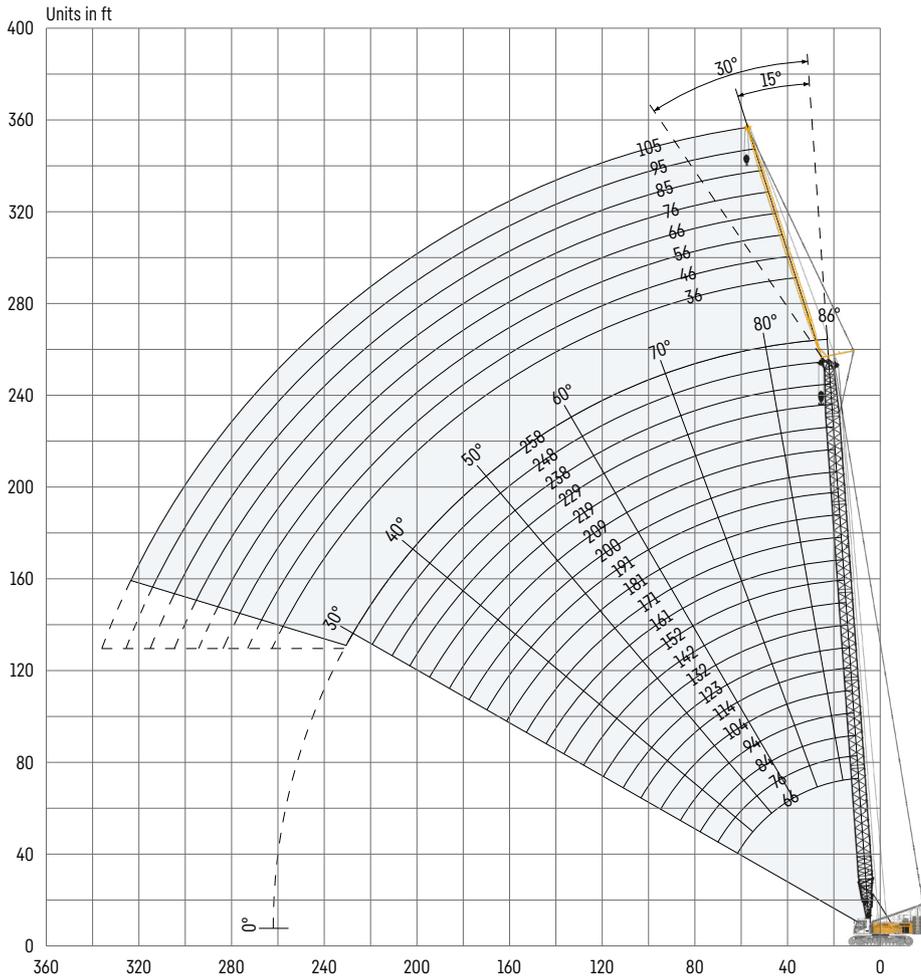

Jib configuration 0806.xx

Jib section	Amount of jib sections							
Jib foot 18 ft	1	1	1	1	1	1	1	1
Jib section 10 ft		1		1		1		1
Jib section 20 ft			1	1	2	2	3	3
Jib head 18 ft	1	1	1	1	1	1	1	1
Jib length [ft]	36	46	56	66	76	85	95	105

Actual lengths of boom sections are metric (e.g. 3 m, 6 m). The figures shown above are approximate conversions to feet.
 For main boom configuration please refer to the table on page 18.

Load capacities with fixed jib 15°

Load capacities in 1000 lbs with 66 ft main boom

Radius [ft]	Jib length [ft]			
	36	66	85	105
25	48.5			
40	43.9	23.0	16.9	
50	41.5	21.5	15.8	11.7
60	38.9	20.1	14.8	10.9
75	36.2	18.4	13.7	9.9
90	33.5	17.3	12.8	9.1
100	31.6	16.8	12.3	8.6
110		16.3	11.9	8.2
120		15.8	11.5	7.8
130		15.4	11.2	7.5
145			11.0	7.1
165				6.8

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 132 ft main boom

Radius [ft]	Jib length [ft]			
	36	66	85	105
21.6	46.1			
40	43.9	22.9		
50	42.4	22.0	15.5	
55	41.7	21.5	15.1	10.9
70	40.0	20.4	14.3	10.3
90	38.4	19.0	13.3	9.4
110	34.3	17.7	12.6	8.7
130	27.0	16.7	11.9	8.1
155	20.7	16.2	11.3	7.5
185		15.6	10.9	7.0
205			10.8	6.8
225				6.8

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 191 ft main boom

Radius [ft]	Jib length [ft]			
	36	66	85	105
23.6	37.3			
40	36.4	20.0		
50	35.8	19.6	12.8	
55	35.6	19.4	12.6	9.0
85	34.2	18.6	11.9	8.5
115	30.5	17.9	11.4	8.1
145	21.3	16.6	11.0	7.7
175	15.3	15.9	10.7	7.2
205	11.1	12.2	10.4	6.9
235		8.9	9.5	6.6
255			7.7	6.6
275				6.6

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 238 ft main boom

Radius [ft]	Jib length [ft]			
	36	66	85	105
25.3	31.6			
40	30.5	15.9		
55	29.7	15.8	10.5	7.4
80	28.6	15.6	10.2	7.3
115	26.2	15.2	9.9	7.1
150	18.7	15.0	9.6	6.8
185	12.4	13.5	9.4	6.6
220	8.1	9.1	8.6	6.4
245	5.8	6.7	7.3	6.4
275		4.4	5.0	5.4
295			3.6	4.1
315				2.9

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 258 ft main boom

Radius [ft]	Jib length [ft]			
	36	56	66	76
26	27.0			
40	26.8	16.7	14.1	
50	26.4	16.4	14.0	11.4
85	24.6	15.8	13.5	11.0
120	22.8	15.4	13.2	10.8
155	17.0	15.0	12.9	10.6
190	11.0	11.8	12.1	10.5
225	7.0	7.7	8.0	8.1
265	3.6	4.3	4.5	4.8
285		2.9	3.2	3.5
295			2.5	2.8
305				2.2

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

TLT 11962422. Above load charts are for reference only. For actual lift duty please refer to load chart in operator's cabin or manual. Otherwise we recommend you to plan your lifting job using Crane Planner 2.0.



www.liebherr.com/CranePlanner

Crane Planner 2.0

Load capacities with fixed jib 30°

Load capacities in 1000 lbs with 66 ft main boom

Radius [ft]	Jib length [ft]			
	36	66	85	105
30	41.6			
50	37.6	19.1		
60	35.5	18.1	13.7	
75	31.4	17.3	12.9	9.1
85	29.0	16.8	12.4	8.7
100	27.0	15.8	11.9	8.1
110		15.2	11.6	7.7
120		14.7	11.2	7.5
130		14.2	10.7	7.2
140			10.3	7.1
150			10.2	6.9
170				6.9

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 132 ft main boom

Radius [ft]	Jib length [ft]			
	36	66	85	105
30.4	40.0			
50	38.5	19.0		
65	37.8	18.2	13.3	
75	37.4	17.6	12.9	8.8
90	34.6	17.0	12.5	8.5
105	32.1	16.8	12.1	8.1
120	29.9	16.1	11.9	7.8
135	25.9	15.5	11.5	7.5
160	19.8	14.6	10.9	7.2
185		14.2	10.3	7.0
205			10.2	6.9
225				6.9

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 191 ft main boom

Radius [ft]	Jib length [ft]			
	36	66	85	105
32.4	34.3			
55	33.8	17.9		
65	33.6	17.6	11.8	
80	33.4	17.2	11.6	8.2
105	32.3	16.6	11.4	7.9
130	25.9	16.0	11.3	7.6
155	19.4	15.5	11.2	7.3
180	14.8	15.1	11.0	7.1
210	10.6	11.9	10.4	7.0
240		8.6	9.3	7.0
255			7.9	7.0
275				6.8

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 238 ft main boom

Radius [ft]	Jib length [ft]			
	36	66	85	105
34.1	29.5			
55	28.9	16.1		
70	28.5	16.0	10.3	
80	28.3	15.9	10.2	7.2
115	27.8	15.7	10.1	7.1
150	19.3	15.3	10.0	7.0
185	12.7	14.1	10.0	6.9
220	8.3	9.6	9.1	6.8
250	5.5	6.6	7.3	6.5
280		4.2	4.8	5.5
300			3.4	4.0
320				2.7

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

Load capacities in 1000 lbs with 258 ft main boom

Radius [ft]	Jib length [ft]			
	36	56	66	76
34.8	26.2			
50	25.5	16.4		
65	25.1	16.3	11.5	
70	25.0	16.2	11.5	9.3
115	24.0	16.0	11.5	9.2
155	17.6	15.2	11.3	9.2
195	10.7	11.7	11.3	9.1
230	6.7	7.6	8.4	8.0
265	3.7	4.5	5.2	5.5
285		3.0	3.7	4.0
305			2.3	2.6
310				2.3

137,400 lbs rear counterweight and 44,100 lbs carbody counterweight

TLT 11962422. Above load charts are for reference only. For actual lift duty please refer to load chart in operator's cabin or manual. Otherwise we recommend you to plan your lifting job using Crane Planner 2.0.



www.liebherr.com/CranePlanner

Crane Planner 2.0