



Working Range Diagram Main Boom

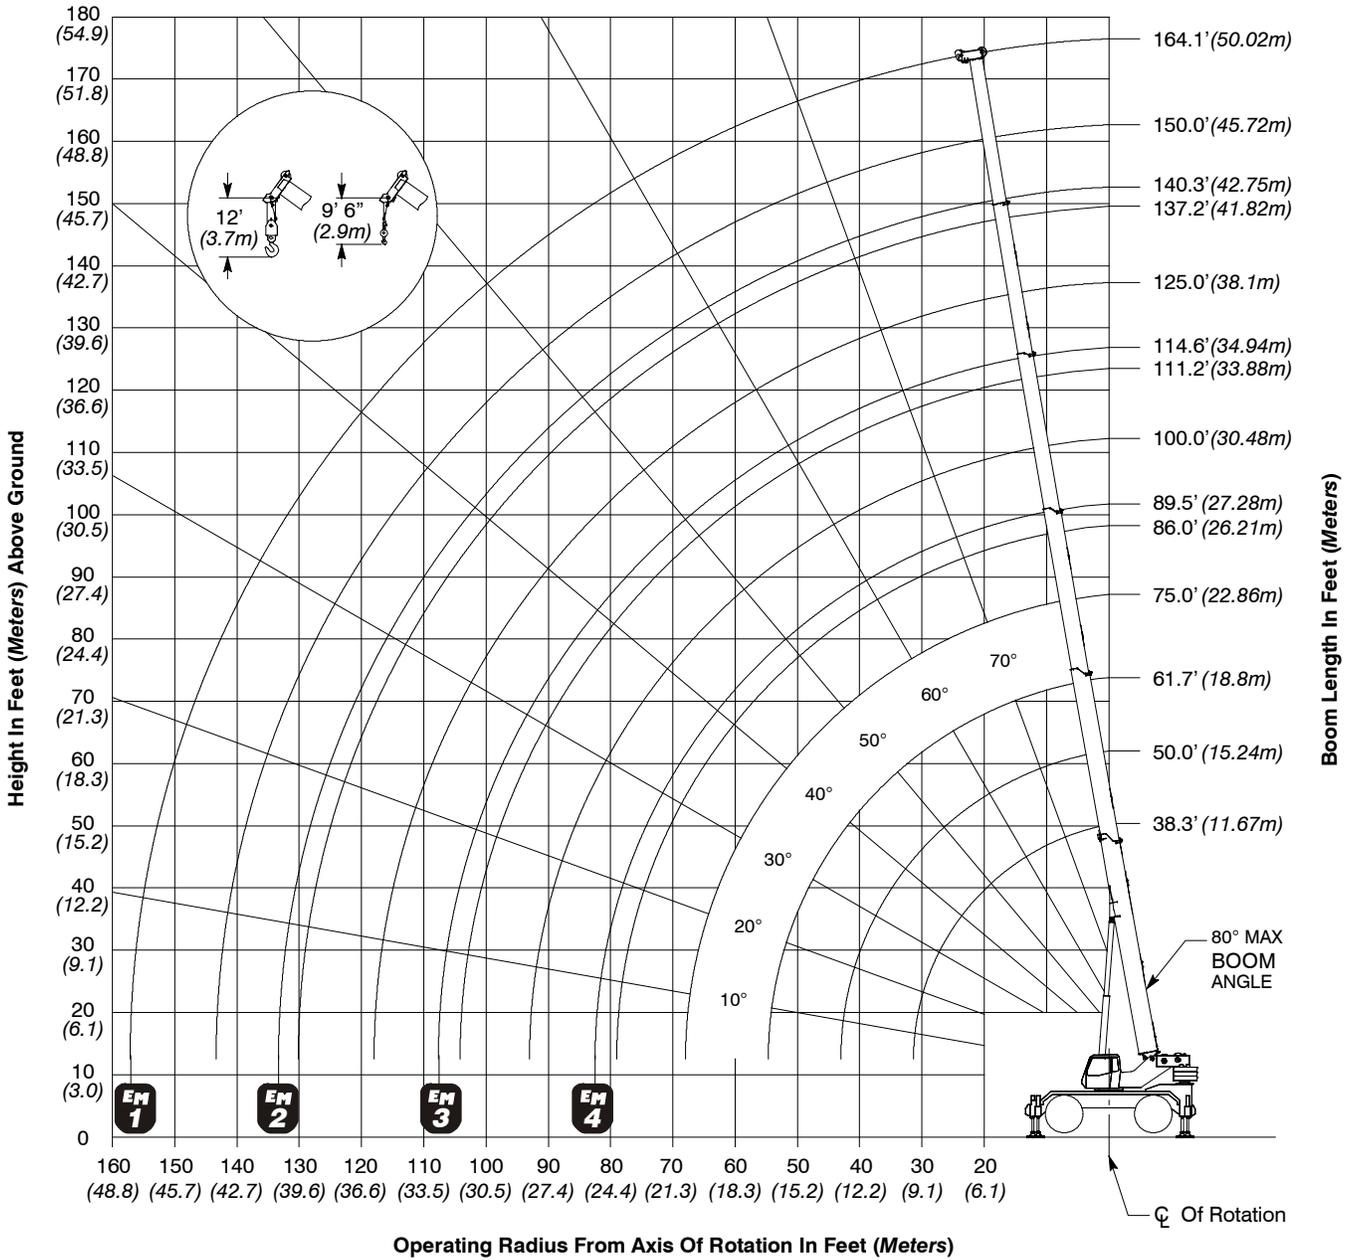

Working Range Diagram Main Boom + Fly

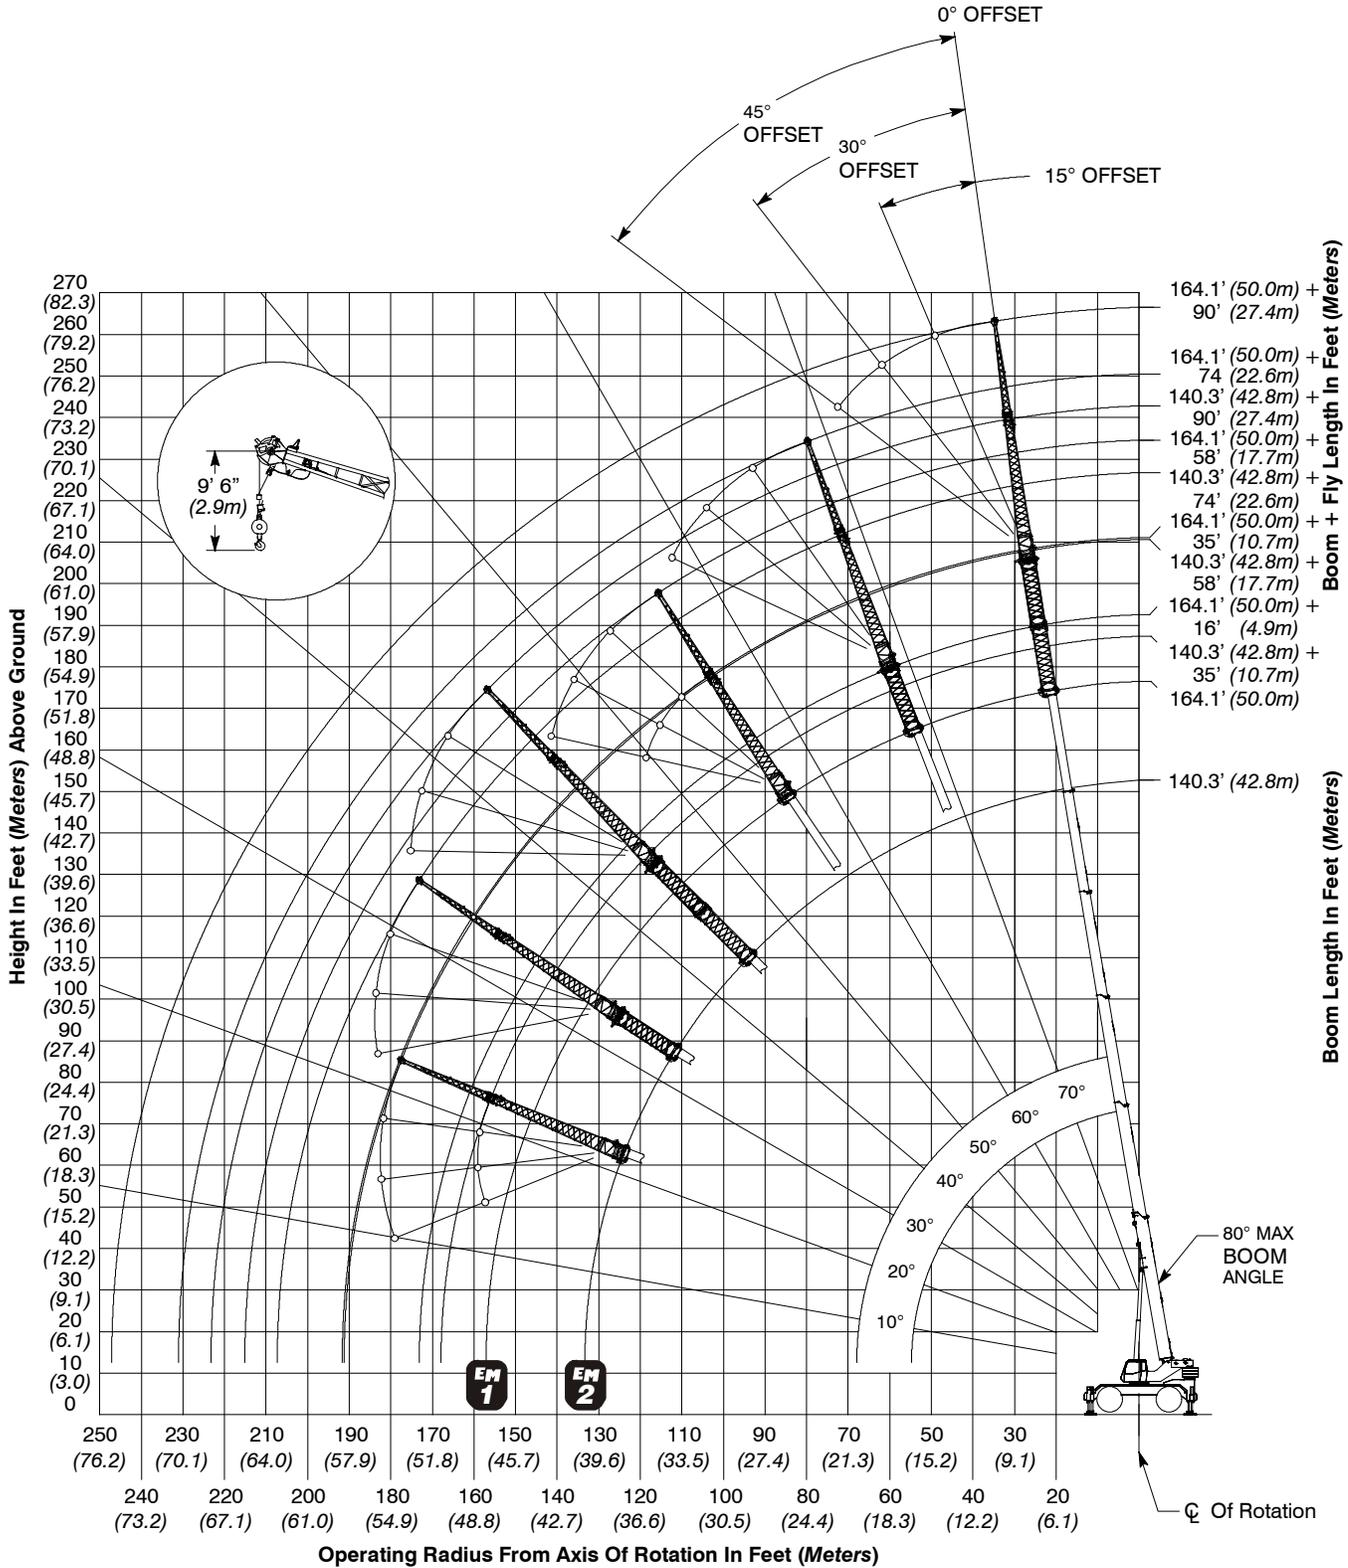

Boom Extend Modes


Boom Length		Telescope Length				
ft	m	T5	T4	T3	T2	T1
38.3	11.67					
50	15.24	50%				
61.7	18.80	100%				
75	22.86	100%	55%			
86	26.21	100%	100%			
100	30.48	100%	100%	56%		
111.2	33.88	100%	100%	100%		
125	38.10	100%	100%	100%	53%	
137.2	41.82	100%	100%	100%	100%	
150	45.72	100%	100%	100%	100%	48%
164.1	50.02	100%	100%	100%	100%	100%

Boom Length		Telescope Length				
ft	m	T5	T4	T3	T2	T1
38.3	11.67					
50	15.24	50%				
62.1	18.94	50%	50%			
75	22.86	50%	50%	51%		
87.3	26.62	50%	50%	100%		
100	30.48	50%	50%	100%	49%	
113.4	34.55	50%	50%	100%	100%	
125	38.10	50%	50%	100%	100%	43%
140.3	42.75	50%	50%	100%	100%	100%


Boom Length		Telescope Length				
ft	m	T5	T4	T3	T2	T1
38.3	11.67					
50	15.24	50%				
62.1	18.94	50%	50%			
74.7	22.78	50%	50%	50%		
87.8	26.75	50%	50%	50%	50%	
100	30.48	50%	50%	50%	50%	46%
114.6	34.94	50%	50%	50%	50%	100%

Boom Length		Telescope Length				
ft	m	T5	T4	T3	T2	T1
38.3	11.67					
50.5	15.38	0%	50%			
63	19.21	0%	50%	50%		
76.1	23.18	0%	50%	50%	50%	
89.5	27.28	0%	50%	50%	50%	50%


EM 1

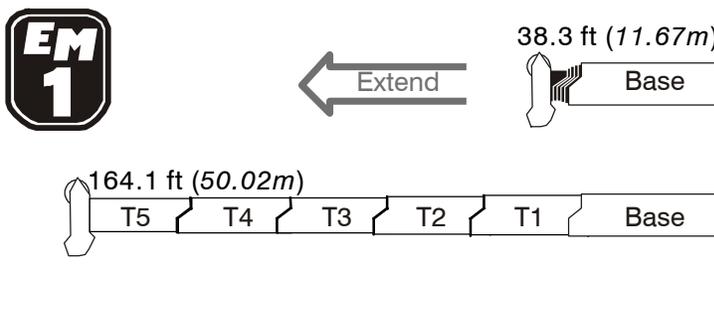


EM 2

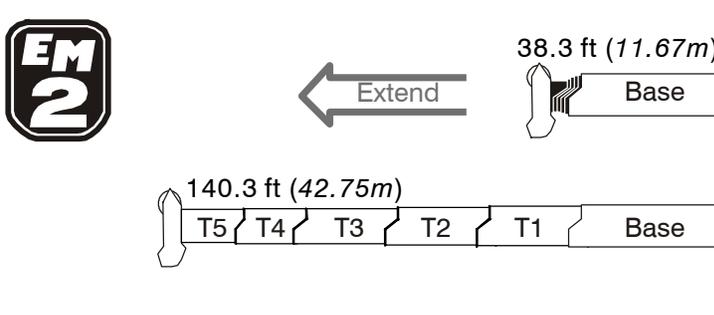

EM 3

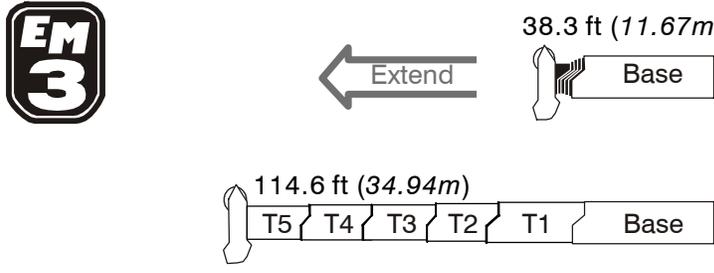

EM 4

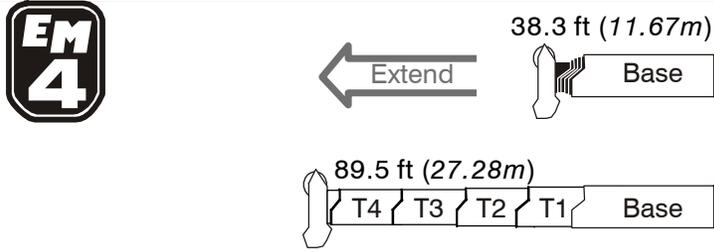

Main Boom Lift Capacity Charts - Imperial

28,800 lb Counterweight - Fully Extended Outriggers - 360° Rotation (All Capacities Are Listed In Pounds)												
Radius (ft)	Boom Length (ft)											Radius (ft)
	38.3	50-50.5	61.7-63	74.7-76.1	86-89.5	100	111.2-114.6	125	137.2-140.3	150	164.1	
7	240,000**											7
8	200,000*											8
10	187,400*											10
10	163,100	160,500	137,600									10
12	146,000	147,100	137,600	120,400								12
15	125,700	127,400	124,800	120,400	91,800							15
20	92,200	95,000	95,800	95,600	91,800	66,100	50,600					20
25	71,300	74,200	75,100	75,000	74,100	66,100	50,600	38,900	25,500			25
30	57,100	60,100	61,100	61,900	62,300	61,400	50,600	38,900	31,000	22,600		30
35		49,800	51,900	52,400	52,100	51,300	46,300	38,900	31,000	22,600	19,700	35
40		42,700	44,300	44,700	44,500	43,700	41,800	38,200	31,000	22,600	19,700	40
45			37,100	37,500	37,100	36,100	35,200	35,200	31,000	22,600	19,700	45
50			31,000	31,500	31,100	31,400	30,500	30,300	29,500	22,600	19,700	50
55			26,300	26,800	27,000	26,700	26,400	25,700	25,000	22,600	19,700	55
60				23,100	23,300	23,000	22,700	22,600	22,900	22,600	19,700	60
65				20,300	20,300	20,000	19,700	21,100	20,800	20,100	19,500	65
70					17,800	18,000	18,100	18,600	18,300	17,600	17,000	70
75					15,800	16,900	16,900	16,500	16,200	15,700	15,100	75
80					14,000	15,300	15,300	14,900	14,500	13,900	13,300	80
85						13,700	13,800	13,300	13,000	12,400	11,800	85
90						12,300	12,400	12,000	11,700	11,000	10,400	90
95							11,200	10,800	10,500	9,900	9,300	95
100							10,100	9,700	9,400	8,800	8,200	100
105							7,400	8,800	8,500	7,900	7,300	105
110								7,900	7,700	7,100	6,500	110
115								7,200	6,900	6,300	5,700	115
120									6,200	5,600	5,100	120
125									5,600	5,000	4,400	125
130									5,000	4,400	3,900	130
135										3,900	3,400	135
140										3,400	2,900	140
145											2,400	145
150											2,000	150
155											1,700	155

* Over Front Only With Special Reeving And/Or Special Equipment
 ** Over Front Only With Special Reeving And/Or Special Equipment On Intermediate Outriggers

This information is not for crane operation. Operator must refer to the in- cab information for crane operation. Rated lifting capacities shown on fully extended outriggers do not exceed 85% of the tipping loads and on tires do not exceed 75% of the tipping loads.

Fly Attachment Lift Capacity Charts - Optional

28,800 lb Counterweight - Fully Extended Outriggers - 360° Rotation									
164.1 ft Main Boom Length									
Radius (ft)	35 ft Manual Offset Fly				58 ft Manual Offset Fly				Radius (ft)
	0°	15°	30°	45°	0°	15°	30°	45°	
10									10
12									12
15									15
20									20
25									25
30									30
35									35
40	10,900								40
45	10,900								45
50	10,900				7,400				50
55	10,900	11,400			7,400				55
60	10,900	11,400			7,400				60
65	10,900	11,400	11,400		7,400	7,700			65
70	10,900	11,400	11,300	10,100	7,400	7,600			70
75	10,900	11,400	11,100	10,000	7,400	7,400			75
80	10,900	11,400	11,000	9,800	7,400	7,300	6,300		80
85	10,900	11,400	10,800	9,700	7,400	7,200	6,200		85
90	10,600	11,400	10,600	9,500	7,400	7,000	6,000	5,300	90
95	9,400	10,100	10,400	9,400	7,400	6,900	5,900	5,300	95
100	8,400	9,000	9,600	9,300	7,400	6,700	5,800	5,200	100
105	7,400	8,100	8,600	8,900	7,400	6,600	5,700	5,200	105
110	6,600	7,200	7,600	8,000	7,100	6,500	5,700	5,100	110
115	5,900	6,400	6,800	7,100	6,400	6,300	5,600	5,100	115
120	5,200	5,700	6,000	6,300	5,700	6,200	5,500	5,000	120
125	4,500	5,000	5,300	5,600	5,100	5,800	5,400	5,000	125
130	4,000	4,400	4,700	4,900	4,500	5,200	5,300	4,900	130
135	3,500	3,800	4,100	4,300	4,000	4,600	5,200	4,900	135
140	3,000	3,300	3,600	3,700	3,500	4,100	4,600	4,800	140
145	2,500	2,900	3,100	3,200	3,000	3,600	4,100	4,400	145
150	2,100	2,400	2,600	2,700	2,600	3,100	3,600	3,900	150
155	1,700	2,000	2,200		2,200	2,700	3,100	3,400	155
160	1,400	1,600	1,800		1,900	2,300	2,700	2,900	160
165	1,100	1,300	1,400		1,500	2,000	2,300	2,500	165
170		900	1,000		1,200	1,600	1,900	2,000	170
175					900	1,300	1,500	1,600	175
180						1,000	1,200		180
185							900		185

This information is not for crane operation. Operator must refer to the in- cab information for crane operation. Rated lifting capacities shown on fully extended outriggers do not exceed 85% of the tipping loads and on tires do not exceed 75% of the tipping loads.

28,800 lb Counterweight - Fully Extended Outriggers - 360° Rotation
 (All Capacities Are Listed In Pounds)

164.1 ft Main Boom Length

Radius (ft)	74 ft Manual Offset Fly				90 ft Manual Offset Fly				Radius (ft)
	0°	15°	30°	45°	0°	15°	30°	45°	
20									20
25									25
30									30
35									35
40									40
45									45
50									50
55	5,300								55
60	5,300				4,000				60
65	5,300				4,000				65
70	5,300	5,400			4,000				70
75	5,300	5,200			4,000				75
80	5,300	5,100			4,000	4,200			80
85	5,300	5,000	4,400		4,000	4,100			85
90	5,300	4,900	4,300		4,000	4,000			90
95	5,300	4,700	4,200	3,900	4,000	3,800	3,500		95
100	5,300	4,600	4,100	3,800	4,000	3,700	3,400	3,200	100
105	5,200	4,500	4,000	3,700	4,000	3,600	3,300	3,100	105
110	5,100	4,400	4,000	3,700	4,000	3,500	3,200	3,100	110
115	5,000	4,300	3,900	3,600	3,800	3,400	3,100	3,000	115
120	4,800	4,200	3,800	3,500	3,700	3,300	3,100	2,900	120
125	4,700	4,100	3,700	3,500	3,600	3,200	3,000	2,800	125
130	4,400	4,000	3,600	3,400	3,500	3,100	2,900	2,700	130
135	3,800	3,900	3,600	3,400	3,400	3,000	2,800	2,700	135
140	3,400	3,800	3,500	3,300	3,300	3,000	2,700	2,600	140
145	2,900	3,500	3,400	3,300	2,900	2,900	2,700	2,500	145
150	2,500	3,100	3,400	3,200	2,500	2,800	2,600	2,500	150
155	2,100	2,600	3,100	3,200	2,100	2,700	2,500	2,400	155
160	1,700	2,300	2,700	2,900	1,700	2,300	2,500	2,400	160
165	1,400	1,900	2,300	2,500	1,400	1,900	2,300	2,300	165
170	1,100	1,500	1,900	2,100	1,100	1,600	1,900	2,200	170
175		1,200	1,500	1,700		1,200	1,600	1,800	175
180		900	1,200	1,300		900	1,300	1,400	180
185			900	1,000			900	1,100	185
190									190
195									195

This information is not for crane operation. Operator must refer to the in- cab information for crane operation. Rated lifting capacities shown on fully extended outriggers do not exceed 85% of the tipping loads and on tires do not exceed 75% of the tipping loads.

Main Boom Lift Capacity Charts - On Tires

28,800 lb Counterweight - On Tires - Stationary - Boom Centered Over Front Between Tire Tracks (All Capacities Are Listed In Pounds)									
Radius (ft)	Boom Length (ft)							Radius (ft)	
	38.3	50	61.7	75	86	100.0	111.2		125
12	66,300								12
15	55,700	58,400							15
20	43,300	46,200	42,100						20
25	34,700	37,600	36,800	40,000					25
30	28,200	31,300	32,700	33,900	31,100				30
35		26,100	28,100	29,000	28,000	24,000			35
40		20,600	22,600	23,500	24,000	24,000	19,900		40
45			18,500	19,500	20,000	20,000	19,900		45
50			15,400	16,300	16,800	16,900	16,800	16,400	50
55				13,900	14,400	14,500	14,500	14,100	55
60				11,900	12,400	12,500	12,500	12,100	60
65				10,200	10,700	10,800	10,900	10,500	65
70					9,300	9,400	9,500	9,100	70
75					8,100	8,200	8,300	7,900	75
80						7,200	7,200	6,900	80
85						6,300	6,300	6,000	85
90						5,500	5,500	5,200	90
95							4,800	4,500	95
100							4,200	3,900	100
105								3,300	105
110								2,800	110
115								2,400	115

This information is not for crane operation. Operator must refer to the in- cab information for crane operation. Rated lifting capacities shown on fully extended outriggers do not exceed 85% of the tipping loads and on tires do not exceed 75% of the tipping loads.

28,800 lb Counterweight - On Tires - Pick & Carry (Creep) - Boom Centered Over Front									
(All Capacities Are Listed In Pounds)									
Radius (ft)	Boom Length (ft)								Radius (ft)
	38.3	50	61.7	75	86	100	111.2	125	
12	59,600								12
15	49,400	51,900							15
20	37,500	40,200	41,700						20
25	29,200	31,900	33,600	34,400					25
30	23,000	26,000	27,700	28,600	29,000				30
35		21,400	23,100	24,000	24,500	21,000			35
40		17,700	19,500	20,400	20,900	21,000	18,100		40
45			16,600	17,500	18,000	18,100	18,100		45
50			14,200	15,200	15,700	15,800	15,800	15,500	50
55				13,200	13,700	13,800	13,900	13,500	55
60				11,500	12,000	12,100	12,200	11,800	60
65				10,000	10,500	10,600	10,700	10,400	65
70					9,300	9,400	9,400	9,100	70
75					8,100	8,200	8,300	7,900	75
80						7,200	7,200	6,900	80
85						6,300	6,300	6,000	85
90						5,500	5,500	5,200	90
95							4,800	4,500	95
100							4,200	3,900	100
105								3,300	105
110								2,800	110
115								2,300	115

This information is not for crane operation. Operator must refer to the in- cab information for crane operation. Rated lifting capacities shown on fully extended outriggers do not exceed 85% of the tipping loads and on tires do not exceed 75% of the tipping loads.

28,800 lb Counterweight - On Tires - Pick & Carry (2.5 mph) - Boom Centered Over Front
 (All Capacities Are Listed In Pounds)

Radius (ft)	Boom Length (ft)								Radius (ft)
	38.3	50	61.7	75	86	100	111.2	125	
12	49,700								12
15	41,000	43,400							15
20	30,500	33,200	34,800						20
25	23,300	26,100	27,800	28,600					25
30	17,900	20,900	22,600	23,500	24,000				30
35		16,900	18,600	19,500	20,000	20,100			35
40		13,700	15,600	16,400	16,900	17,000	17,000		40
45			13,000	14,000	14,500	14,600	14,600		45
50			10,900	11,900	12,400	12,500	12,600	12,200	50
55				10,100	10,700	10,800	10,800	10,500	55
60				8,600	9,200	9,300	9,400	9,000	60
65				7,400	7,900	8,000	8,100	7,700	65
70					6,800	6,900	7,000	6,600	70
75					5,800	5,900	6,000	5,600	75
80						5,100	5,100	4,800	80
85						4,300	4,400	4,000	85
90						3,600	3,700	3,300	90
95							3,100	2,700	95
100							2,500	2,100	100
105								1,600	105
110								1,200	110

This information is not for crane operation. Operator must refer to the in- cab information for crane operation. Rated lifting capacities shown on fully extended outriggers do not exceed 85% of the tipping loads and on tires do not exceed 75% of the tipping loads.

Main Boom Lift Capacity Charts - 85% - Metric

13.2t Counterweight - Fully Extended Outriggers - 360° Rotation (All Capacities Are Listed In Kilograms)												
Radius (m)	Boom Length (m)										Radius (m)	
	11.67	15.24-15.38	18.80-19.21	22.78-23.18	26.21-27.28	30.48	33.88-34.94	38.1	41.82-42.75	45.72		50.02
2.1	110 000**											2.1
2.5	90 000*											2.5
3.0	85 000*											3.0
3.0	74 650	73 350	62 400									3.0
3.5	68 100	68 200	62 400									3.5
4.0	62 450	63 200	60 400	54 600								4.0
4.5	57 650	58 400	57 100	54 600	41 650							4.5
5.0	51 950	53 200	53 550	53 350	41 650							5.0
6.0	42 550	43 800	44 200	44 100	41 650	29 950	22 950					6.0
7.0	35 700	37 000	37 400	37 350	36 900	29 950	22 950					7.0
8.0	30 500	31 800	32 250	32 200	31 850	29 950	22 950	17 650	11 600			8.0
9.0	26 400	27 750	28 200	28 300	28 750	28 400	22 950	17 650	14 050	10 250		9.0
10.0		24 450	24 900	25 600	25 450	25 100	22 050	17 650	14 050	10 250		10.0
12.0		19 650	20 450	20 700	20 550	20 200	19 200	17 500	14 050	10 250	8 950	12.0
14.0			16 250	16 450	16 250	15 950	15 400	15 700	14 050	10 250	8 950	14.0
16.0			12 900	13 150	13 150	13 100	12 950	12 650	12 300	10 250	8 950	16.0
18.0				10 750	10 850	10 700	10 550	10 400	10 550	10 250	8 950	18.0
20.0				9 150	9 050	8 900	8 750	9 450	9 300	8 950	8 650	20.0
22.0					7 650	7 950	8 000	8 000	7 850	7 550	7 250	22.0
24.0					6 500	7 150	7 150	6 950	6 800	6 500	6 200	24.0
26.0						6 200	6 200	6 000	5 850	5 550	5 300	26.0
28.0							5 400	5 400	5 200	4 800	4 550	28.0
30.0								4 750	4 550	4 400	3 900	30.0
32.0								3 350	4 000	3 850	3 300	32.0
34.0									3 500	3 350	2 850	34.0
36.0										2 950	2 400	36.0
38.0										2 550	2 050	38.0
40.0										1 250	1 700	40.0
42.0											1 400	42.0
44.0											1 150	44.0
46.0											900	46.0

* Over Front Only With Special Reeving And/Or Special Equipment
 ** Over Front Only With Special Reeving And/Or Special Equipment On Intermediate Outriggers

This information is not for crane operation. Operator must refer to the in- cab information for crane operation. Rated lifting capacities shown on fully extended outriggers do not exceed 85% of the tipping loads and on tires do not exceed 75% of the tipping loads.

Fly Attachment Lift Capacity Charts - Optional

13.2t Counterweight - Fully Extended Outriggers - 360° Rotation									
50.02m Main Boom Length									
Radius (m)	10.7m Manual Offset Fly				17.7m Manual Offset Fly				Radius (m)
	0°	15°	30°	45°	0°	15°	30°	45°	
12.0	4 950								12.0
14.0	4 950								14.0
16.0	4 950				3 350				16.0
18.0	4 950	5 200			3 350				18.0
20.0	4 950	5 200	5 150		3 350	3 500			20.0
22.0	4 950	5 200	5 050	4 550	3 350	3 400			22.0
24.0	4 950	5 200	5 000	4 500	3 350	3 300			24.0
26.0	4 950	5 200	4 900	4 400	3 350	3 250	2 800		26.0
28.0	4 600	4 950	4 750	4 300	3 350	3 150	2 700	2 400	28.0
30.0	3 950	4 250	4 500	4 250	3 350	3 050	2 650	2 350	30.0
32.0	3 350	3 650	3 900	4 050	3 350	3 000	2 600	2 350	32.0
34.0	2 900	3 150	3 350	3 500	3 150	2 900	2 550	2 300	34.0
36.0	2 450	2 700	2 850	3 000	2 700	2 850	2 500	2 300	36.0
38.0	2 100	2 300	2 450	2 550	2 300	2 650	2 450	2 250	38.0
40.0	1 750	1 900	2 050	2 150	1 950	2 300	2 400	2 200	40.0
42.0	1 450	1 600	1 750	1 800	1 650	1 950	2 200	2 200	42.0
44.0	1 150	1 300	1 450	1 500	1 400	1 650	1 900	2 000	44.0
46.0	950	1 050	1 150	1 200	1 150	1 400	1 600	1 700	46.0
48.0	700	800	900		900	1 150	1 300	1 400	48.0
50.0	500	600	650		700	900	1 050	1 150	50.0
52.0		400	450		550	700	850	900	52.0
54.0						500	650	650	54.0
56.0							450		56.0

This information is not for crane operation. Operator must refer to the in- cab information for crane operation. Rated lifting capacities shown on fully extended outriggers do not exceed 85% of the tipping loads and on tires do not exceed 75% of the tipping loads.

13.2t Counterweight - Fully Extended Outriggers - 360° Rotation
(All Capacities Are Listed In Kilograms)

50.02m Main Boom Length

Radius (m)	22.6m Manual Offset Fly				27.4m Manual Offset Fly				Radius (m)
	0°	15°	30°	45°	0°	15°	30°	45°	
16.0	2 400								16.0
18.0	2 400								18.0
20.0	2 400				1 800				20.0
22.0	2 400	2 400			1 800				22.0
24.0	2 400	2 350			1 800	1 900			24.0
26.0	2 400	2 250	2 000		1 800	1 850			26.0
28.0	2 400	2 200	1 950		1 800	1 750	1 650		28.0
30.0	2 400	2 100	1 900	1 750	1 800	1 700	1 550	1 500	30.0
32.0	2 350	2 050	1 850	1 700	1 800	1 650	1 500	1 400	32.0
34.0	2 300	2 000	1 800	1 650	1 800	1 600	1 450	1 350	34.0
36.0	2 200	1 900	1 750	1 600	1 700	1 500	1 400	1 300	36.0
38.0	2 150	1 850	1 700	1 550	1 650	1 450	1 350	1 300	38.0
40.0	1 900	1 800	1 650	1 550	1 600	1 400	1 300	1 250	40.0
42.0	1 600	1 750	1 600	1 500	1 500	1 350	1 250	1 200	42.0
44.0	1 350	1 650	1 550	1 500	1 350	1 300	1 200	1 150	44.0
46.0	1 100	1 350	1 500	1 450	1 100	1 250	1 150	1 100	46.0
48.0	850	1 100	1 300	1 400	850	1 100	1 150	1 100	48.0
50.0	650	900	1 050	1 150	650	900	1 100	1 050	50.0
52.0	450	650	850	900	450	700	850	950	52.0
54.0		500	600	700		500	650	750	54.0
56.0			400	450			450	550	56.0

This information is not for crane operation. Operator must refer to the in- cab information for crane operation. Rated lifting capacities shown on fully extended outriggers do not exceed 85% of the tipping loads and on tires do not exceed 75% of the tipping loads.

Main Boom Lift Capacity Charts - On Tires

13.2t Counterweight - On Tires - Stationary - Boom Centered Over Front Between Tire Tracks (All Capacities Are Listed In Kilograms)									
Radius (m)	Boom Length (m)							Radius (m)	
	11.67	15.24	18.8	22.86	26.21	30.48	33.88		38.1
3.5	30 050								3.5
4.0	28 100								4.0
4.5	25 600	26 450							4.5
5.0	23 400	24 700							5.0
6.0	19 900	21 250	19 050						6.0
7.0	17 150	18 500	17 600						7.0
8.0	14 900	16 250	16 150	17 450					8.0
9.0	13 050	14 450	15 000	15 600	14 050				9.0
10.0		12 900	13 700	14 150	13 300				10.0
12.0		9 600	10 500	10 950	11 150	10 850	9 000		12.0
14.0			8 100	8 500	8 750	8 750	8 750		14.0
16.0			6 400	6 850	7 100	7 100	7 100	6 950	16.0
18.0				5 550	5 800	5 800	5 850	5 650	18.0
20.0				4 550	4 750	4 800	4 850	4 700	20.0
22.0					4 000	4 000	4 050	3 900	22.0
24.0						3 350	3 400	3 250	24.0
26.0							2 800	2 700	26.0
28.0							2 350	2 250	28.0
30.0								2 000	30.0
32.0									32.0
34.0									34.0

This information is not for crane operation. Operator must refer to the in- cab information for crane operation. Rated lifting capacities shown on fully extended outriggers do not exceed 85% of the tipping loads and on tires do not exceed 75% of the tipping loads.

13.2t Counterweight - On Tires - Pick & Carry (Creep) - Boom Centered Over Front
(All Capacities Are Listed In Kilograms)

Radius (m)	Boom Length (m)							Radius (m)	
	11.67	15.24	18.8	22.86	26.21	30.48	33.88		38.1
3.5	27 000								3.5
4.0	25 150								4.0
4.5	22 750	23 500							4.5
5.0	20 700	21 800							5.0
6.0	17 300	18 500	18 900						6.0
7.0	14 600	15 850	16 600						7.0
8.0	12 450	13 750	14 500	13 150					8.0
9.0	10 650	12 000	12 800	13 150	13 400				9.0
10.0		10 550	11 350	11 750	11 950				10.0
12.0		8 200	9 050	9 450	9 700	9 500	8 200		12.0
14.0			7 300	7 700	7 950	8 000	8 000		14.0
16.0			6 000	6 400	6 650	6 700	6 700	6 550	16.0
18.0				5 350	5 600	5 650	5 650	5 500	18.0
20.0				4 450	4 700	4 750	4 750	4 600	20.0
22.0					3 950	4 000	4 050	3 900	22.0
24.0					3 350	3 350	3 400	3 250	24.0
26.0						2 800	2 850	2 700	26.0
28.0						2 350	2 400	2 250	28.0
30.0							2 000	1 850	30.0
32.0								1 500	32.0
34.0								1 200	34.0

This information is not for crane operation. Operator must refer to the in- cab information for crane operation. Rated lifting capacities shown on fully extended outriggers do not exceed 85% of the tipping loads and on tires do not exceed 75% of the tipping loads.

13.2t Counterweight - On Tires - Pick & Carry 4 kph) - Boom Centered Over Front
 (All Capacities Are Listed In Kilograms)

Radius (m)	Boom Length (m)							Radius (m)	
	11.67	15.24	18.8	22.86	26.21	30.48	33.88		38.1
3.5	22 500								3.5
4.0	20 950								4.0
4.5	18 850	19 650							4.5
5.0	17 050	18 200							5.0
6.0	14 100	15 300	15 750						6.0
7.0	11 750	13 050	13 800						7.0
8.0	9 900	11 200	11 950	12 350					8.0
9.0	8 300	9 650	10 450	10 850	11 050				9.0
10.0		8 400	9 200	9 600	9 800				10.0
12.0		6 400	7 200	7 600	7 850	7 850	7 900		12.0
14.0			5 700	6 150	6 400	6 400	6 450		14.0
16.0			4 550	4 950	5 200	5 250	5 300	5 150	16.0
18.0				4 050	4 300	4 350	4 350	4 200	18.0
20.0				3 250	3 500	3 550	3 600	3 450	20.0
22.0					2 900	2 950	2 950	2 800	22.0
24.0					2 350	2 400	2 400	2 250	24.0
26.0						1 950	1 950	1 800	26.0
28.0						1 550	1 550	1 400	28.0
30.0							1 200	1 050	30.0
32.0								750	32.0

This information is not for crane operation. Operator must refer to the in- cab information for crane operation. Rated lifting capacities shown on fully extended outriggers do not exceed 85% of the tipping loads and on tires do not exceed 75% of the tipping loads.