



Working Range Diagrams


Main Boom

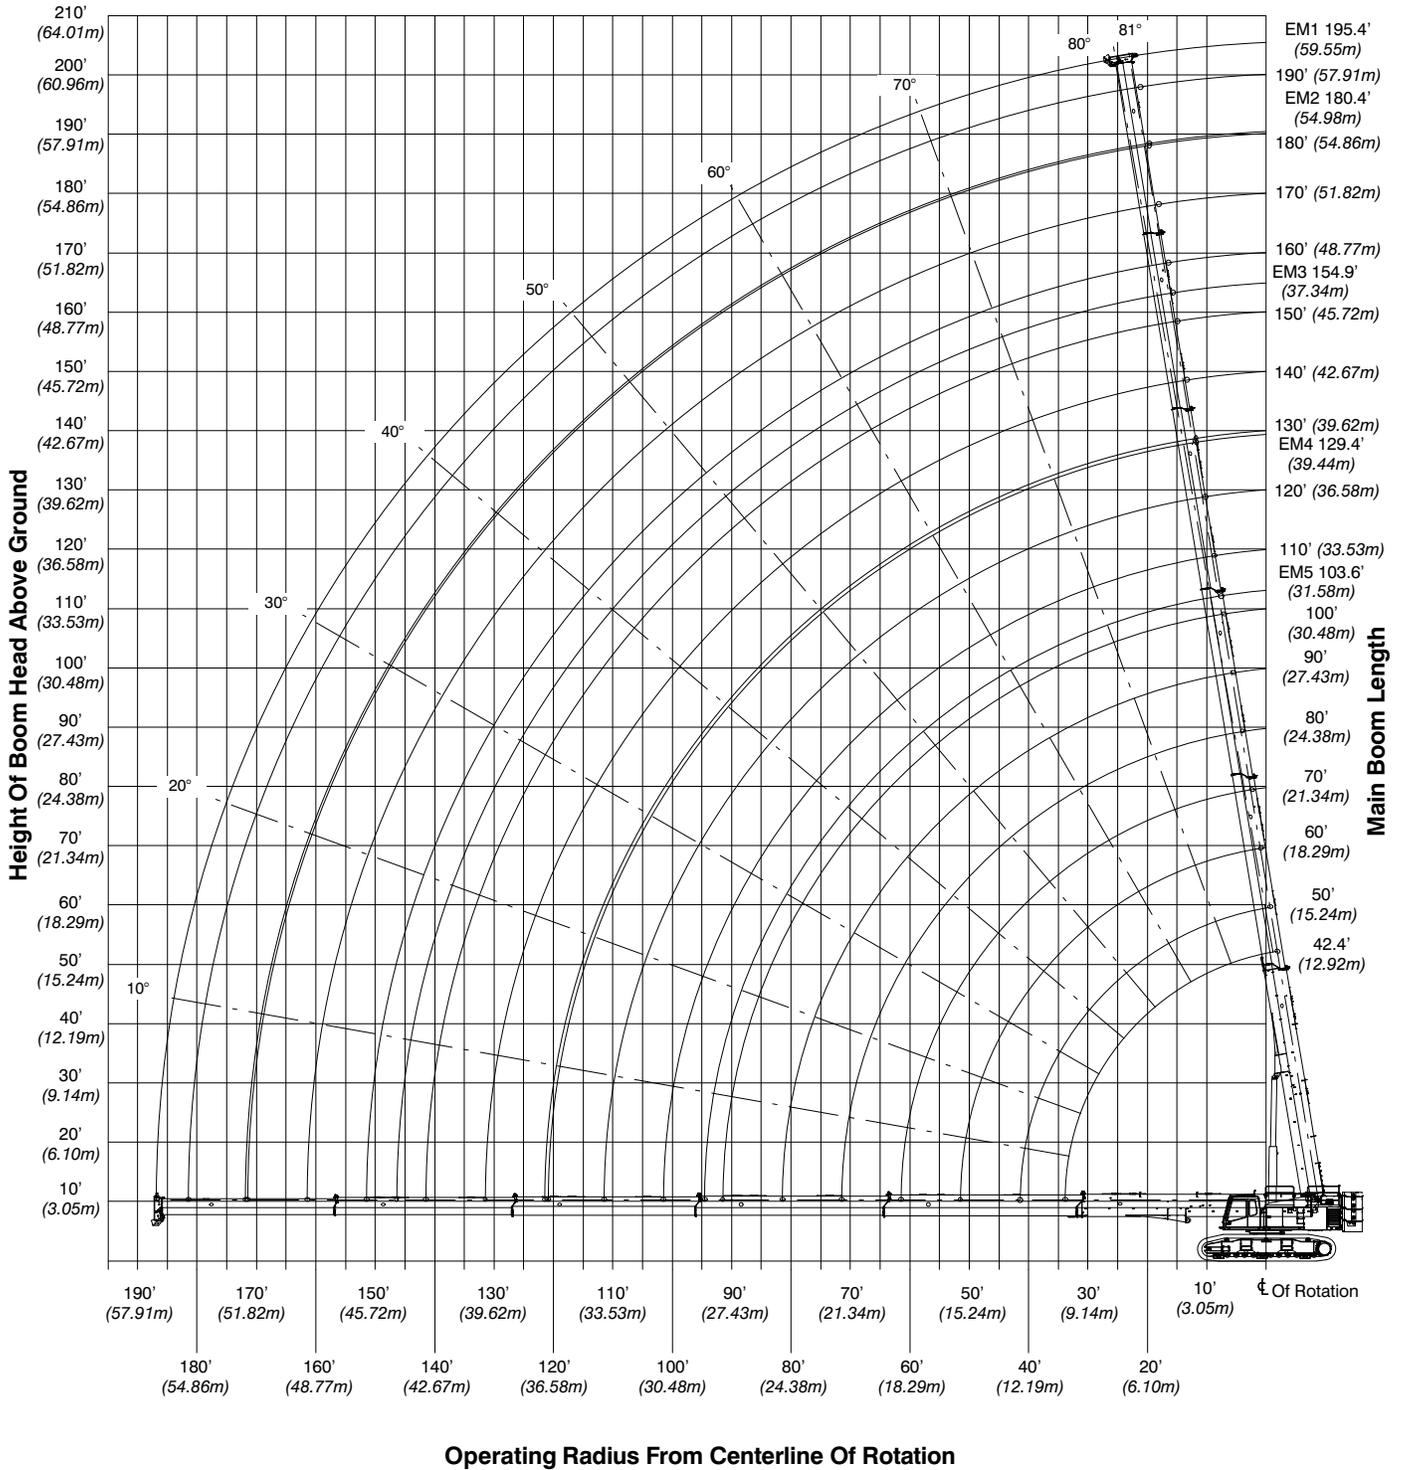

195.4' Main Boom + 10' Fly

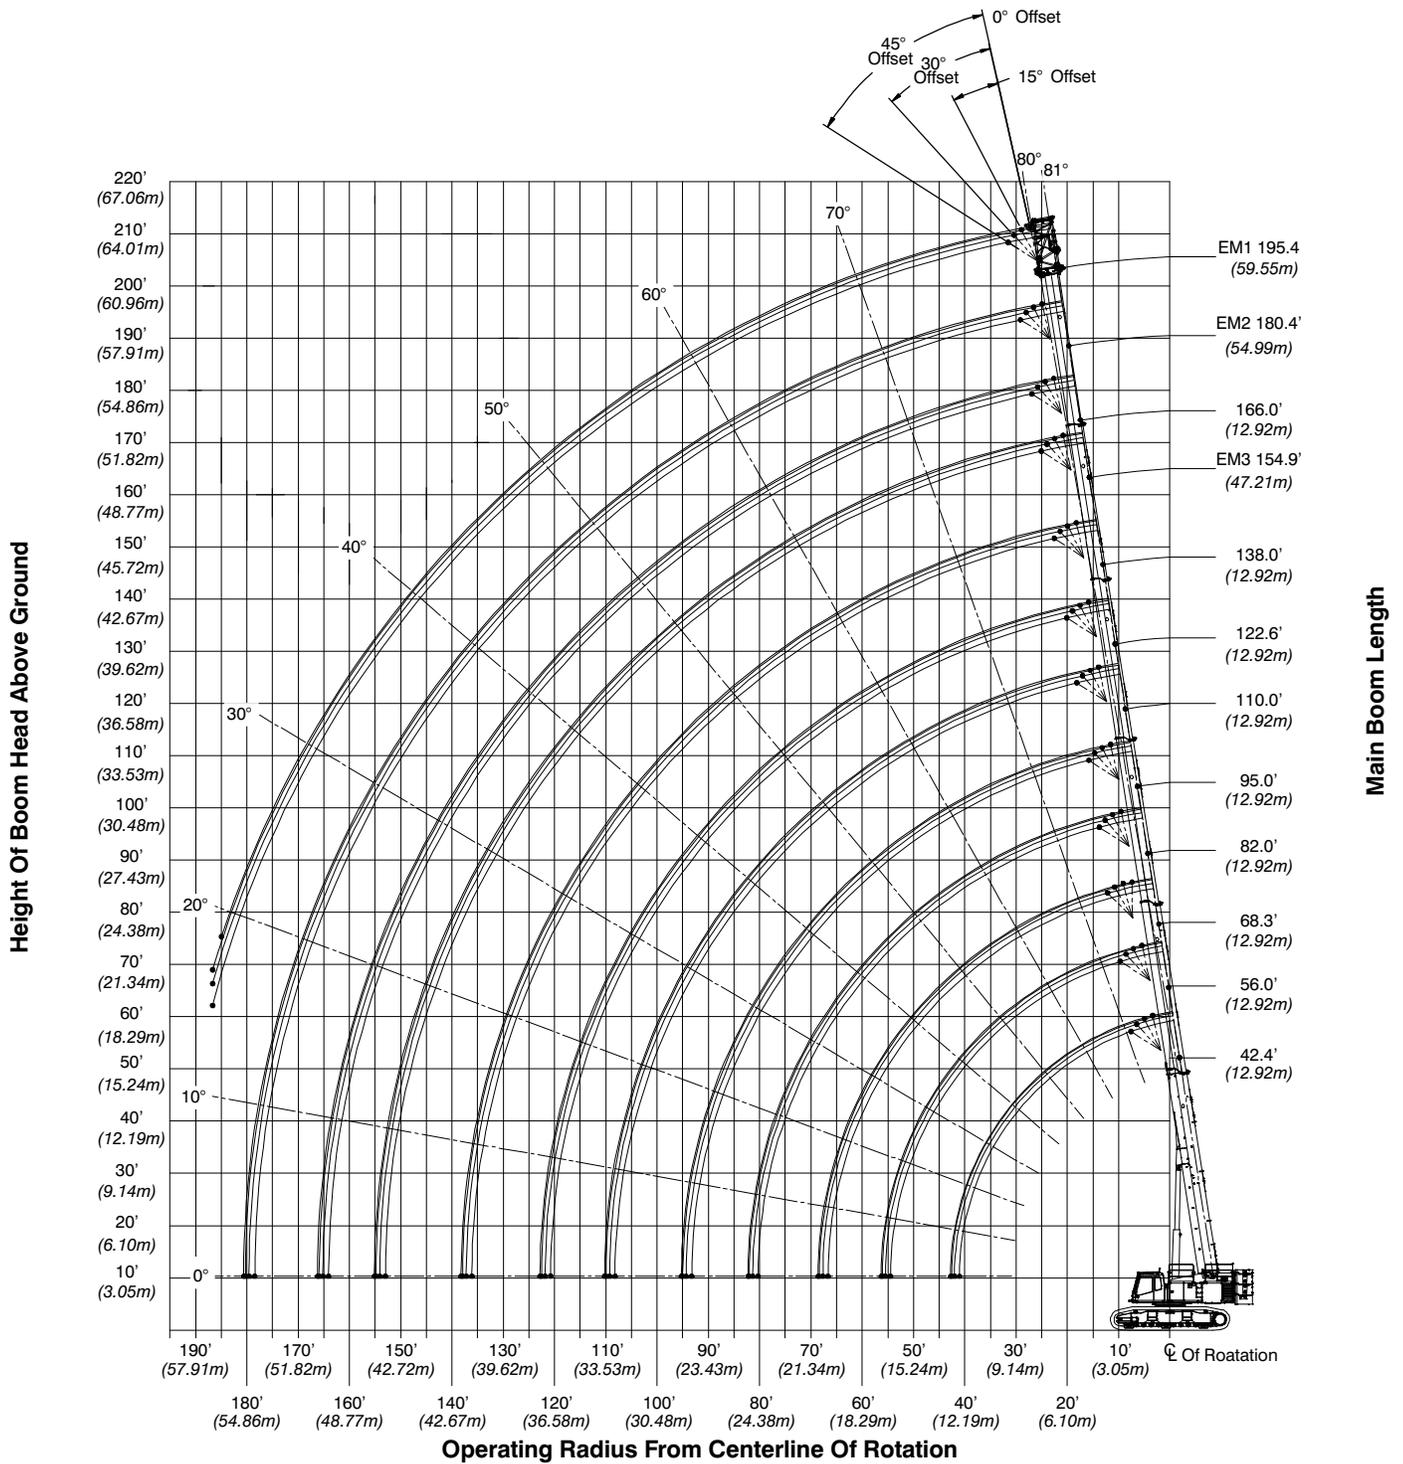

180' Main Boom + 10, 31-55' Fly

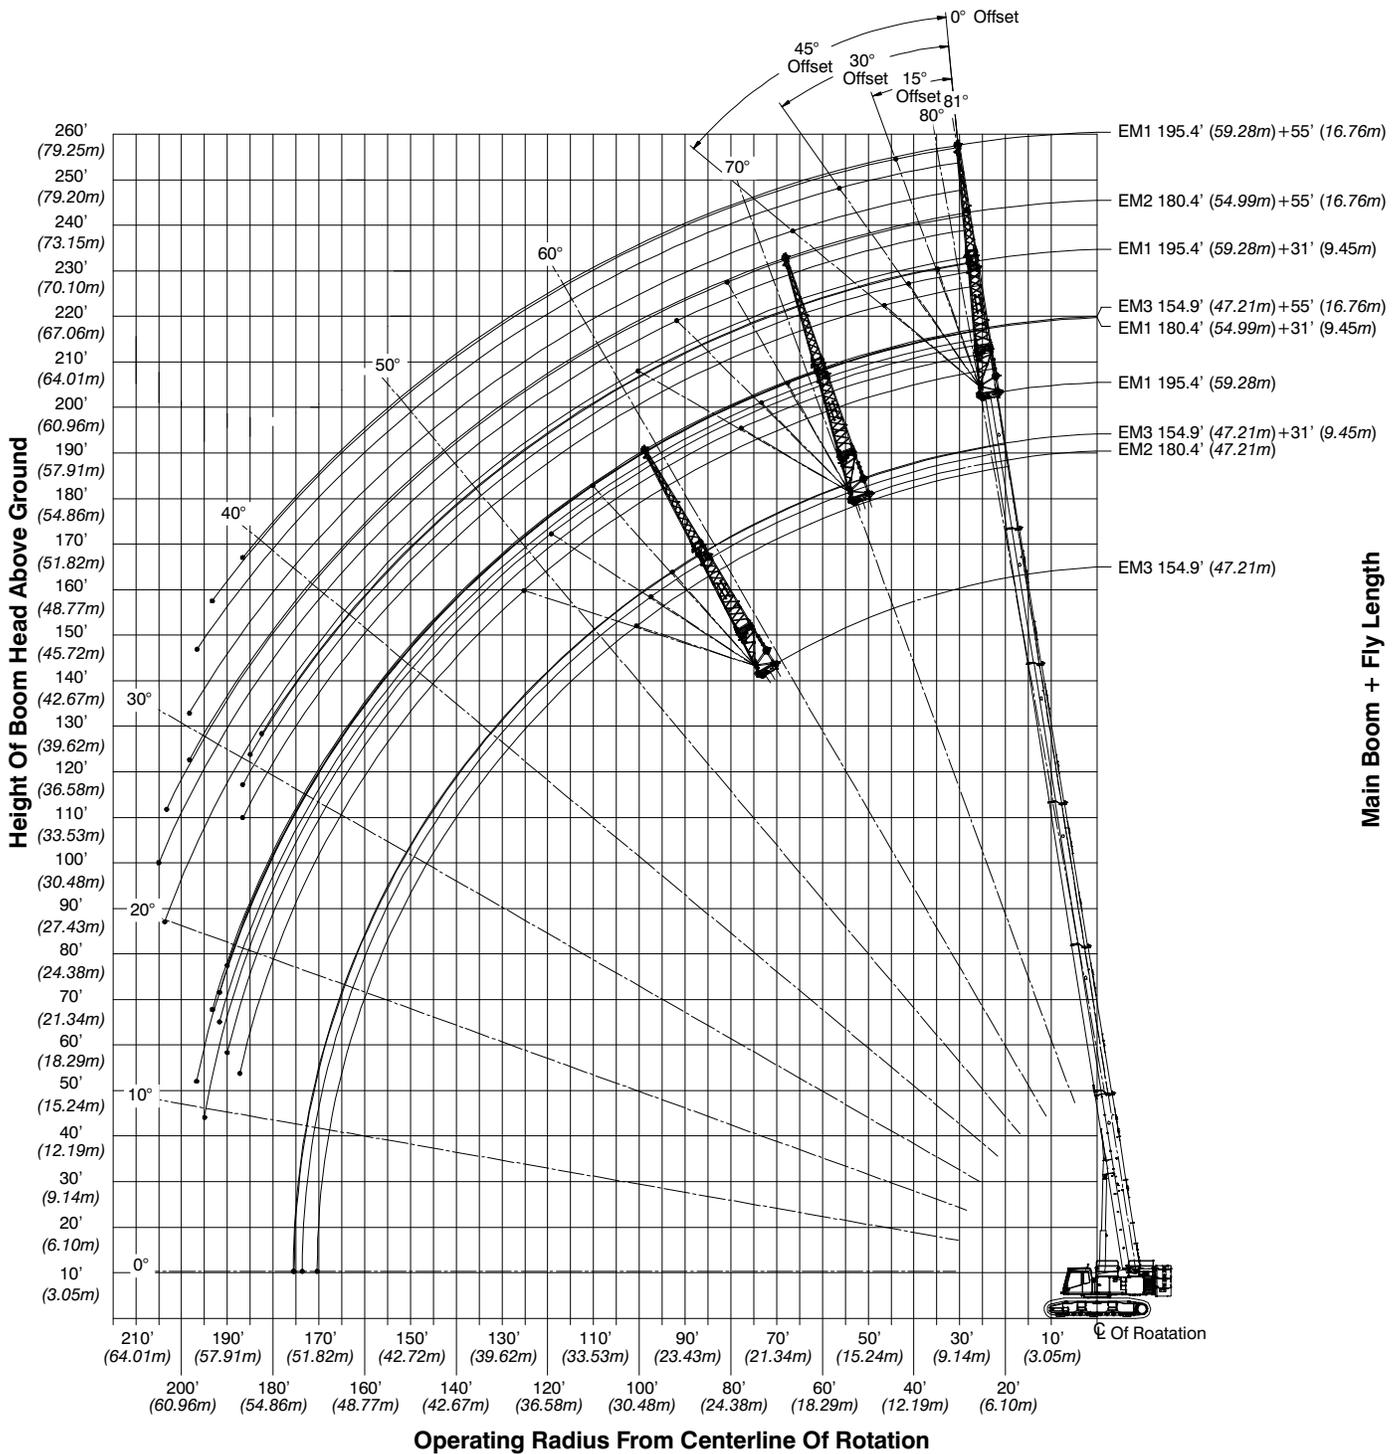

Main Boom Load Charts – Imperial

Main Boom Lift Capacity Chart - 360° Rotation - Fully Extended Tracks ABCD+A [82,000 lb Counterweight] [All capacities are listed in lb]													
Load Radius (ft)	Main Boom												
	42.4	55.5–56.4	68.3–71.3	82–87	95–103.6	110–116	122.6–125.6	129.4–131.6	138–141	147–154.9	163.1–166	179–180.4	195.4
8.0	280,000												
9.0	269,800												
10.0	258,700	168,500	157,800										
12.0	226,400	168,500	157,800										
15.0	181,100	168,500	147,700	120,000									
20.0	133,800	137,100	127,300	110,700	93,500	75,400							
25.0	103,500	107,600	108,400	97,300	88,100	75,400	53,300	63,800					
30.0	76,600	81,200	81,500	81,100	77,900	75,400	47,700	61,300	50,000	38,800	26,700		
35.0		64,000	65,700	66,100	65,500	64,300	43,000	55,100	45,500	38,800	30,400	26,400	
40.0		52,200	53,800	54,300	53,700	52,600	39,000	49,700	41,500	38,800	30,400	26,400	21,500
45.0		43,500	45,600	45,600	45,200	44,100	35,600	43,400	38,200	38,800	30,400	26,400	21,500
50.0			39,400	39,900	38,600	37,600	32,700	36,900	35,300	36,500	30,300	26,400	21,500
55.0			34,200	35,000	34,100	33,800	30,100	32,000	32,700	32,100	28,200	26,400	21,500
60.0			30,000	30,800	29,800	29,700	27,900	27,800	28,500	27,900	26,200	26,400	21,500
65.0				27,300	27,600	27,700	25,800	24,400	25,100	24,500	24,500	25,500	21,500
70.0				24,400	24,700	24,900	23,300	21,900	23,200	22,200	23,000	22,600	21,500
75.0				21,900	22,500	22,400	21,800	20,500	21,800	20,700	20,800	20,200	20,200
80.0					20,300	20,300	20,000	19,300	19,600	19,500	18,700	18,800	18,100
85.0					18,500	18,400	18,200	18,200	17,800	18,000	17,000	17,200	16,600
90.0					16,900	16,900	16,700	16,900	16,300	16,500	15,400	15,500	14,900
95.0						15,400	15,200	15,400	14,800	15,000	14,500	14,100	13,500
100.0						14,100	13,900	14,100	13,500	13,700	13,400	12,800	12,200
105.0						13,000	12,700	12,900	12,400	12,600	12,300	11,600	11,100
110.0							11,700	11,900	11,300	11,500	11,200	10,600	10,000
115.0							9,100	11,000	10,400	10,600	10,300	9,600	9,100
120.0								10,100	9,500	9,700	9,400	8,800	8,200
125.0									8,700	8,900	8,600	8,000	7,400
130.0									6,100	8,200	7,900	7,300	6,700
135.0										7,600	7,200	6,600	6,000
140.0										6,500	6,600	6,000	5,400
145.0										3,800	6,100	5,400	4,900
150.0											5,500	4,900	4,300
155.0											4,300	4,400	3,800
160.0												4,000	3,400
165.0												3,500	3,000
170.0												3,200	2,600
175.0													2,200
180.0													1,900
185.0													1,600

This material is supplied for reference use only. Operator must refer to in-cab Crane Rating Manual and Operator's Manual to determine allowable crane lifting capacities and assembly and operating procedures.

Fly Attachment Load Charts – Imperial

Main Boom +10' Offset Fly Lift Capacity Chart - 360° Rotation - Fully Extended Tracks ABCD+A [82,000 lb Counterweight] [All capacities are listed in lb]													
Load Radius (ft)	Boom Length (ft)												Load Radius (ft)
	42.4				82.0–86.0				122.6–125.6				
	0°	15°	30°	45°	0°	15°	30°	45°	0°	15°	30°	45°	
10.0	71,600	71,600	71,600	62,700									10.0
12.0	71,600	71,600	70,100	61,600	71,400								12.0
15.0	71,600	71,600	66,600	59,800	71,400	71,400							15.0
20.0	71,600	71,600	62,700	57,100	71,400	71,400	69,600	61,200					20.0
25.0	71,600	66,400	59,900	54,600	71,400	71,400	66,500	59,700	48,700	49,000			25.0
30.0	71,600	62,700	57,000	53,000	71,400	71,400	63,800	58,100	45,700	45,000	44,400	43,900	30.0
35.0	63,000	60,400	55,100		65,800	66,500	62,700	56,500	41,300	40,800	40,300	39,900	35.0
40.0	51,400	51,800			54,000	54,500	55,000	55,100	37,300	36,900	36,500	36,200	40.0
45.0					45,500	45,900	46,300	46,600	33,900	33,600	33,300	33,100	45.0
50.0					38,900	38,700	39,600	39,900	31,000	30,700	30,500	30,300	50.0
55.0					34,300	45,900	34,500	34,700	28,400	28,200	28,000	27,900	55.0
60.0					30,600	30,900	30,800	30,600	26,100	26,000	25,900	25,800	60.0
65.0					27,200	27,400	27,600	17,800	24,200	24,000	23,900	23,900	65.0
70.0					24,300	24,500	24,600		22,400	22,300	22,200	22,200	70.0
75.0					21,800	22,000	22,100		20,500	20,300	20,400	20,600	75.0
80.0					19,700	19,800			19,100	19,000	19,000	18,900	80.0
85.0					17,100	14,300			17,700	17,900	17,800	17,800	85.0
90.0									16,200	16,400	16,500	16,600	90.0
95.0									14,800	14,900	15,100	13,500	95.0
100.0									13,500	13,600	13,700		100.0
105.0									12,400	12,500	12,600		105.0
110.0									11,300	11,400	11,500		110.0
115.0									10,400	10,500			115.0
120.0									9,600	9,600			120.0
125.0									7,200				125.0

This material is supplied for reference use only. Operator must refer to in-cab Crane Rating Manual and Operator's Manual to determine allowable crane lifting capacities and assembly and operating procedures.

Main Boom +10' Offset Fly Lift Capacity Chart - 360° Rotation - Fully Extended Tracks
ABCD+A [82,000 lb Counterweight]
 [All capacities are listed in lb]

Load Radius (ft)	Boom Length (ft)								Load Radius (ft)
	163.1–166				195.4				
	0°	15°	30°	45°	0°	15°	30°	45°	
35.0	26,600	27,100							35.0
40.0	26,600	27,100	28,500	29,000	8,100				40.0
45.0	26,600	27,100	28,500	29,000	8,100	8,200	8,600		45.0
50.0	26,600	27,100	28,500	28,300	8,100	8,200	8,600	9,100	50.0
55.0	26,600	26,600	26,400	26,200	8,100	8,200	8,600	9,100	55.0
60.0	24,800	24,700	24,500	24,400	8,100	8,200	8,600	9,100	60.0
65.0	23,100	22,900	22,800	22,700	8,100	8,200	8,600	9,100	65.0
70.0	21,500	21,400	21,300	21,200	8,100	8,200	8,600	9,100	70.0
75.0	19,900	20,200	20,100	20,000	8,100	8,200	8,600	9,100	75.0
80.0	17,800	18,100	18,300	18,500	8,100	8,200	8,600	9,100	80.0
85.0	16,300	16,500	16,700	16,800	8,100	8,200	8,600	9,100	85.0
90.0	14,600	14,900	15,000	15,200	8,100	8,200	8,600	9,100	90.0
95.0	13,200	13,400	13,600	13,700	8,100	8,200	8,600	8,700	95.0
100.0	12,000	12,100	12,300	12,400	7,700	7,900	8,000	8,000	100.0
105.0	10,800	11,000	11,100	11,200	7,100	7,200	7,300	7,400	105.0
110.0	9,800	10,000	10,100	10,200	6,600	6,700	6,700	6,800	110.0
115.0	8,900	9,000	9,100	9,200	6,000	6,100	6,200	6,300	115.0
120.0	8,000	8,200	8,300	8,300	5,500	5,600	5,700	5,700	120.0
125.0	7,300	7,400	7,500	7,500	5,000	5,100	5,200	5,200	125.0
130.0	6,500	6,700	6,700		4,600	4,700	4,700	4,800	130.0
135.0	5,900	6,000	6,100		4,100	4,200	4,300	4,300	135.0
140.0	5,300	5,400	5,500		3,700	3,800	3,900	3,900	140.0
145.0	4,700	4,800	4,900		3,300	3,400	3,500	3,500	145.0
150.0	4,200	4,300	4,300		3,000	3,000	3,100	3,100	150.0
155.0	3,800	3,800			2,600	2,700	2,700		155.0
160.0	3,300	3,400			2,300	2,400	2,400		160.0
165.0	2,900				2,000	2,000	2,100		165.0
170.0	2,900				1,700	1,700	1,800		170.0
175.0	2,900				1,400	1,400	1,500		175.0
180.0	2,900				1,100	1,200			180.0

This material is supplied for reference use only. Operator must refer to in-cab Crane Rating Manual and Operator's Manual to determine allowable crane lifting capacities and assembly and operating procedures.

Main Boom +31' Offset Fly Lift Capacity Chart - 360° Rotation - Fully Extended Tracks									
ABCD+A [82,000 lb Counterweight]									
[All capacities are listed in lb]									
Load Radius (ft)	Boom Length (ft)								Load Radius (ft)
	180.4				195.4				
	0°	15°	30°	45°	0°	15°	30°	45°	
45.0	14,400				6,000				45.0
50.0	14,400				6,000	6,100			50.0
55.0	14,400	14,500			6,000	6,100			55.0
60.0	14,400	14,500			6,000	6,100	6,500		60.0
65.0	14,400	14,500	15,000		6,000	6,100	6,500	7,300	65.0
70.0	14,400	14,500	15,000	15,800	6,000	6,100	6,500	7,300	70.0
75.0	14,400	14,500	15,000	15,800	6,000	6,100	6,500	7,300	75.0
80.0	14,400	14,500	15,000	15,800	6,000	6,100	6,500	7,300	80.0
85.0	14,400	14,500	15,000	15,800	6,000	6,100	6,500	7,300	85.0
90.0	14,300	14,500	15,000	15,800	6,000	6,100	6,500	7,300	90.0
95.0	12,900	13,600	14,200	14,700	6,000	6,100	6,500	7,300	95.0
100.0	11,600	12,300	12,800	13,300	6,000	6,100	6,500	7,300	100.0
105.0	10,500	11,100	11,600	12,000	6,000	6,100	6,500	7,100	105.0
110.0	9,400	10,000	10,500	10,800	6,000	6,100	6,500	6,700	110.0
115.0	8,500	9,000	9,500	9,800	5,800	6,100	6,200	6,200	115.0
120.0	7,700	8,200	8,600	8,900	5,300	6,100	5,800	5,800	120.0
125.0	6,900	7,400	7,700	8,000	4,800	5,600	5,400	5,400	125.0
130.0	6,200	6,600	7,000	7,200	4,300	5,100	4,900	5,000	130.0
135.0	5,500	5,900	6,200	6,400	3,900	4,600	4,400	4,600	135.0
140.0	4,900	5,300	5,600	5,800	3,500	4,200	4,000	4,100	140.0
145.0	4,400	4,700	5,000	5,100	3,100	3,800	3,600	3,700	145.0
150.0	3,800	4,200	4,400	4,500	2,800	3,400	3,200	3,300	150.0
155.0	3,400	3,700	3,900	4,000	2,400	3,000	2,800	2,900	155.0
160.0	2,900	3,200	3,400	3,500	2,100	2,700	2,500	2,600	160.0
165.0	2,500	2,800	2,900		1,800	2,300	2,100	2,200	165.0
170.0	2,100	2,300	2,500		1,500	2,000	1,800	1,900	170.0
175.0	1,700	1,900	2,100		1,200	1,400	1,500		175.0
180.0	1,400	1,600	1,700			1,100	1,200		180.0
185.0	1,100	1,200	1,300						185.0

This material is supplied for reference use only. Operator must refer to in-cab Crane Rating Manual and Operator's Manual to determine allowable crane lifting capacities and assembly and operating procedures.

Main Boom +55' Offset Fly Lift Capacity Chart - 360° Rotation - Fully Extended Tracks									
ABCD+A [82,000 lb Counterweight]									
[All capacities are listed in lb]									
Load Radius (ft)	Boom Length (ft)								Load Radius (ft)
	180.4				195.4				
	0°	15°	30°	45°	0°	15°	30°	45°	
50.0	10,700				4,300				50.0
55.0	10,700				4,300				55.0
60.0	10,700				4,300				60.0
65.0	10,700				4,300	4,400			65.0
70.0	10,700	10,900			4,300	4,400			70.0
75.0	10,700	10,900			4,300	4,400			75.0
80.0	10,700	10,900	9,700		4,300	4,400	4,900		80.0
85.0	10,700	10,900	9,600		4,300	4,400	4,900		85.0
90.0	10,700	10,900	9,400	8,400	4,300	4,400	4,900	5,900	90.0
95.0	10,700	10,800	9,300	8,300	4,300	4,400	4,900	5,900	95.0
100.0	10,700	10,600	9,100	8,200	4,300	4,400	4,900	5,900	100.0
105.0	10,700	10,400	9,000	8,100	4,300	4,400	4,900	5,900	105.0
110.0	10,100	10,200	8,900	8,100	4,300	4,400	4,900	5,900	110.0
115.0	9,100	10,000	8,800	8,000	4,300	4,400	4,900	5,900	115.0
120.0	8,300	9,200	8,600	7,900	4,300	4,400	4,900	5,800	120.0
125.0	7,500	8,300	8,500	7,900	4,300	4,400	4,900	5,500	125.0
130.0	6,800	7,600	8,200	7,800	4,300	4,400	4,900	5,100	130.0
135.0	6,100	6,900	7,500	7,800	4,100	4,400	4,700	4,800	135.0
140.0	5,500	6,200	6,800	7,200	3,700	4,200	4,300	4,500	140.0
145.0	4,900	5,600	6,100	6,500	3,300	3,800	4,000	4,200	145.0
150.0	4,400	5,000	5,500	5,900	3,000	3,500	3,700	3,900	150.0
155.0	3,900	4,500	5,000	5,300	2,600	3,100	3,500	3,600	155.0
160.0	3,500	4,000	4,500	4,700	2,300	2,800	3,100	3,300	160.0
165.0	3,100	3,600	4,000	4,200	2,000	2,400	2,700	3,000	165.0
170.0	2,700	3,100	3,500	3,700	1,700	2,100	2,400	2,600	170.0
175.0	2,300	2,700	3,100	3,200	1,400	1,800	2,100	2,300	175.0
180.0	1,900	2,300	2,600	2,800	1,200	1,500	1,800	1,900	180.0
185.0	1,600	2,000	2,200	2,300		1,300	1,500	1,600	185.0
190.0	1,300	1,600	1,900				1,200	1,300	190.0
195.0		1,300	1,300						195.0

This material is supplied for reference use only. Operator must refer to in-cab Crane Rating Manual and Operator's Manual to determine allowable crane lifting capacities and assembly and operating procedures.

Main Boom Load Charts – Metric – 75%

Main Boom Lift Capacity Chart - 360° Rotation - Fully Extended Tracks ABCD+A [37 194kg Counterweight] [All capacities are listed in kg]														
Load Radius (m)	Boom Length (m)													Load Radius (m)
	12.9	16.9– 17.2	20.8– 21.7	25– 26.5	29– 31.6	33.5– 35.4	37.4– 38.3	39.4– 40.1	42.1– 43	44.8– 47.2	49.7– 50.6	54.6– 55	59.6	
2.5	127 000													2.5
3.0	118 100	76 400	71 550											3.0
3.5	107 200	76 400	71 550											3.5
4.0	94 000	76 400	71 550											4.0
4.5	83 500	76 400	67 500	54 400										4.5
5.0	74 900	76 300	64 150	54 400										5.0
6.0	61 750	63 200	58 250	50 650	42 400	34 200								6.0
7.0	52 150	53 650	53 400	46 450	42 200	34 200								7.0
8.0	43 300	45 100	45 500	42 800	38 700	34 200	23 500	29 000						8.0
9.0	35 650	37 350	37 850	37 700	35 700	34 200	21 850	27 800	22 650	17 550				9.0
10.0	30 000	32 050	32 850	32 950	32 700	32 100	20 400	26 200	21 500	17 550	13 750			10.0
12.0		24 200	24 950	25 200	24 950	24 400	17 900	22 850	19 100	17 550	13 750	12 000	9 750	12.0
14.0		19 100	20 050	20 050	19 900	19 400	15 900	19 100	17 050	17 550	13 750	12 000	9 750	14.0
16.0			16 600	16 900	16 500	16 000	14 250	15 600	15 400	15 650	13 250	12 000	9 750	16.0
18.0			13 900	14 300	13 850	13 750	12 800	12 950	13 250	13 000	12 050	12 000	9 750	18.0
20.0				12 200	12 350	12 350	11 550	10 900	11 200	10 950	11 050	11 400	9 750	20.0
22.0				10 550	10 750	10 800	10 250	9 650	10 250	9 750	10 050	9 750	9 750	22.0
24.0					9 450	9 450	9 300	8 900	9 150	9 000	8 700	8 750	8 400	24.0
26.0					8 300	8 300	8 200	8 200	8 000	8 100	7 700	7 750	7 450	26.0
28.0					7 400	7 400	7 300	7 400	7 150	7 250	6 850	6 800	6 500	28.0
30.0						6 600	6 500	6 600	6 300	6 400	6 250	6 000	5 700	30.0
32.0						5 900	5 750	5 850	5 600	5 700	5 550	5 250	5 000	32.0
34.0							5 150	5 250	5 000	5 100	4 950	4 650	4 400	34.0
36.0								4 700	4 450	4 550	4 400	4 100	3 850	36.0
38.0									4 000	4 050	3 900	3 650	3 400	38.0
40.0									2 700	3 650	3 500	3 200	2 950	40.0
42.0										3 300	3 100	2 800	2 600	42.0
44.0										1 750	2 750	2 500	2 250	44.0
46.0											2 450	2 150	1 900	46.0
48.0												1 900	1 650	48.0
50.0												1 650	1 400	50.0
52.0												1 150	1 150	52.0
54.0													950	54.0
56.0													750	56.0

This material is supplied for reference use only. Operator must refer to in-cab Crane Rating Manual and Operator's Manual to determine allowable crane lifting capacities and assembly and operating procedures.

Main Boom Load Charts – Metric CE

Main Boom Lift Capacity Chart - 360° Rotation - Fully Extended Tracks ABCD+A [37 194kg Counterweight] [All capacities are listed in kg]														
Load Radius (m)	Boom Length (m)													Load Radius (m)
	12.9	16.9– 17.2	20.8– 21.7	25– 26.5	29– 31.6	33.5– 35.4	37.4– 38.3	39.4– 40.1	42.1– 43	44.8– 47.2	49.7– 50.6	54.6– 55	59.6	
2.5	127 000													2.5
3.0	118 100	76 400	71 550											3.0
3.5	107 200	76 400	71 550											3.5
4.0	94 000	76 400	71 250											4.0
4.5	83 500	76 400	67 500	54 400										4.5
5.0	74 900	76 300	64 150	54 400										5.0
6.0	61 750	63 200	58 250	50 650	42 400	34 200								6.0
7.0	52 150	53 650	53 400	46 450	42 200	34 200								7.0
8.0	44 850	46 400	46 850	42 800	38 700	34 200	23 500	29 000						8.0
9.0	37 350	39 300	39 900	37 700	35 700	34 200	21 850	27 800	22 650	17 550				9.0
10.0	31 350	33 650	34 550	34 750	33 250	32 650	20 400	26 200	21 500	17 550	13 750			10.0
12.0		25 300	26 150	26 400	26 200	25 600	17 900	22 850	19 100	17 550	13 750	12 000	9 750	12.0
14.0		19 850	20 950	20 950	20 800	20 250	15 900	19 850	17 050	17 550	13 750	12 000	9 750	14.0
16.0			17 250	17 550	16 900	16 400	14 250	16 050	15 400	15 900	13 250	12 000	9 750	16.0
18.0			14 400	14 850	14 350	14 200	12 800	13 300	13 700	13 400	12 050	12 000	9 750	18.0
20.0				12 600	12 450	12 500	11 600	11 100	11 500	11 200	11 050	11 650	9 750	20.0
22.0				10 850	10 950	11 000	10 250	9 650	10 250	9 750	10 100	9 950	9 750	22.0
24.0					9 700	9 650	9 450	8 900	9 350	9 000	8 850	8 750	8 400	24.0
26.0					8 500	8 450	8 350	8 200	8 150	8 250	7 750	7 700	7 500	26.0
28.0					7 500	7 500	7 350	7 500	7 200	7 300	6 850	6 800	6 500	28.0
30.0						6 600	6 500	6 600	6 300	6 450	6 250	5 950	5 650	30.0
32.0						5 900	5 750	5 850	5 550	5 650	5 500	5 200	4 900	32.0
34.0							5 100	5 200	4 900	5 000	4 850	4 500	4 250	34.0
36.0								4 650	4 350	4 450	4 300	3 950	3 650	36.0
38.0									3 850	3 950	3 750	3 450	3 150	38.0
40.0									2 350	3 500	3 300	3 000	2 700	40.0
42.0										3 100	2 900	2 550	2 300	42.0
44.0										1 350	2 550	2 200	1 900	44.0
46.0											2 200	1 850	1 600	46.0
48.0												1 550	1 300	48.0
50.0												1 300	1 000	50.0
52.0												700	750	52.0
54.0													950	54.0

This material is supplied for reference use only. Operator must refer to in-cab Crane Rating Manual and Operator's Manual to determine allowable crane lifting capacities and assembly and operating procedures.

Fly Attachment Load Charts – Metric – 75%

Main Boom + 3.1m Offset Fly Lift Capacity Chart - 360° Rotation - Fully Extended Tracks ABCD+A [37 194kg Counterweight] [All capacities are listed in kg]													
Load Radius (m)	Boom Length (m)												Load Radius (m)
	12.9				25.0–26.2				37.4–38.3				
	0°	15°	30°	45°	0°	15°	30°	45°	0°	15°	30°	45°	
3.0	32 450	32 450	32 450	28 450	32 400								3.0
3.5	32 450	32 450	32 100	28 100	32 400								3.5
4.0	32 450	32 450	31 150	27 600	32 400								4.0
4.5	32 450	32 450	30 300	27 150	32 400	32 400							4.5
5.0	32 450	32 450	29 500	26 750	32 400	32 400							5.0
6.0	32 450	32 450	28 450	25 950	32 400	32 400	31 650	27 850					6.0
7.0	32 450	31 100	27 850	25 200	32 400	32 400	30 700	27 350					7.0
8.0	32 450	29 550	26 800	24 550	32 400	32 400	29 850	26 900	22 100	22 200			8.0
9.0	32 450	28 450	25 950	24 100	32 400	32 400	29 050	26 450	20 950	20 600	20 350	20 100	9.0
10.0	31 400	28 050	25 300	23 850	32 400	32 400	28 450	25 900	19 450	19 200	19 000	18 900	10.0
12.0	23 900	24 100	24 200		25 050	25 300	25 550	25 050	17 100	16 950	16 750	16 650	12.0
14.0					20 000	20 200	20 400	20 500	15 100	14 950	14 850	14 750	14.0
16.0					16 400	16 600	16 700	16 800	13 450	13 350	13 250	13 200	16.0
18.0					14 250	14 350	14 150	14 100	12 050	11 950	11 900	11 850	18.0
20.0					12 100	12 250	12 300	8 000	10 850	10 800	10 750	10 700	20.0
22.0					10 500	10 600	10 600		9 650	9 750	9 750	9 750	22.0
24.0					9 150	9 200			8 800	8 800	8 750	8 700	24.0
26.0					7 700	6 450			8 050	8 050	8 750	8 050	26.0
28.0									7 100	7 200	8 050	7 250	28.0
30.0									6 300	6 350	7 250		30.0
32.0									5 600	5 650	6 400		32.0
34.0									5 000	5 050	5 700		34.0
36.0									4 500	4 500	5 050		36.0
38.0									3 300	3 350			38.0

This material is supplied for reference use only. Operator must refer to in-cab Crane Rating Manual and Operator's Manual to determine allowable crane lifting capacities and assembly and operating procedures.

Main Boom + 3.1m Offset Fly Capacity Chart - 360° Rotation - Fully Extended Tracks
ABCD+A [37 194kg Counterweight]
 [All capacities are listed in kg]

Load Radius (m)	Boom Length (m)								Load Radius (m)
	49.7–50.6				59.6				
	0°	15°	30°	45°	0°	15°	30°	45°	
10.0	12 050								10.0
12.0	12 050	12 350	12 900		3 650				12.0
14.0	12 050	12 350	12 900	13 200	3 650	3 750	3 900		14.0
16.0	12 050	12 350	12 400	12 350	3 650	3 750	3 900	4 150	16.0
18.0	11 450	11 350	11 250	11 200	3 650	3 750	3 900	4 150	18.0
20.0	10 400	10 300	10 250	10 200	3 650	3 750	3 900	4 150	20.0
22.0	9 450	9 450	9 450	9 400	3 650	3 750	3 900	4 150	22.0
24.0	8 300	8 450	8 550	8 600	3 650	3 750	3 900	4 150	24.0
26.0	7 300	7 450	7 500	7 600	3 650	3 750	3 900	4 150	26.0
28.0	6 400	6 500	6 550	6 600	3 650	3 750	3 900	4 100	28.0
30.0	5 600	5 700	5 750	5 800	3 600	3 650	3 700	3 750	30.0
32.0	4 900	5 000	5 050	5 100	3 250	3 300	3 350	3 350	32.0
34.0	4 300	4 400	4 450	4 450	2 900	2 950	3 000	3 000	34.0
36.0	3 800	3 850	3 900	3 900	2 600	2 650	2 650	2 700	36.0
38.0	3 300	3 350	3 400	3 450	2 300	2 350	2 350	2 400	38.0
40.0	2 900	2 950	3 000		2 000	2 050	2 100	2 100	40.0
42.0	2 500	2 550	2 600		1 750	1 800	1 850	1 850	42.0
44.0	2 200	2 200	2 250		1 550	1 550	1 600	1 600	44.0
46.0	1 850	1 900	1 900		1 300	1 350	1 400	1 400	46.0
48.0	1 600	1 650			1 100	1 150	1 150		48.0
50.0	1 350	1 400			900	950	950		50.0
52.0					750	750	800		52.0
54.0					600	600	600		54.0

This material is supplied for reference use only. Operator must refer to in-cab Crane Rating Manual and Operator's Manual to determine allowable crane lifting capacities and assembly and operating procedures.

Main Boom + 9.5m Offset Fly Capacity Chart - 360° Rotation - Fully Extended Tracks
ABCD+A [37 194kg Counterweight]
 [All capacities are listed in kg]

Load Radius (m)	Boom Length (m)								Load Radius (m)
	55				59.6				
	0°	15°	30°	45°	0°	15°	30°	45°	
12.0	6 500				2 700				12.0
14.0	6 500				2 700				14.0
16.0	6 500	6 550			2 700	2 750			16.0
18.0	6 500	6 550			2 700	2 750	2 950		18.0
20.0	6 500	6 550	6 800		2 700	2 750	2 950	3 300	20.0
22.0	6 500	6 550	6 800	7 200	2 700	2 750	2 950	3 300	22.0
24.0	6 500	6 550	6 800	7 200	2 700	2 750	2 950	3 300	24.0
26.0	6 500	6 550	6 800	7 200	2 700	2 750	2 950	3 300	26.0
28.0	6 250	6 550	6 800	7 100	2 700	2 750	2 950	3 300	28.0
30.0	5 450	5 750	6 000	6 200	2 700	2 750	2 950	3 300	30.0
32.0	4 750	5 050	5 250	5 450	2 700	2 750	2 950	3 200	32.0
34.0	4 150	4 400	4 600	4 750	2 700	2 750	2 950	2 950	34.0
36.0	3 600	3 850	4 050	4 150	2 450	2 600	2 700	2 700	36.0
38.0	3 150	3 350	3 550	3 650	2 200	2 350	2 450	2 500	38.0
40.0	2 700	2 900	3 050	3 150	1 900	2 050	2 150	2 250	40.0
42.0	2 350	2 500	2 650	2 750	1 650	1 800	1 900	1 950	42.0
44.0	2 000	2 150	2 300	2 350	1 450	1 550	1 650	1 700	44.0
46.0	1 700	1 850	1 950	2 000	1 200	1 350	1 400	1 450	46.0
48.0	1 400	1 550	1 650	1 700	1 000	1 150	1 200	1 250	48.0
50.0	1 150	1 300	1 350		850	950	1 000	1 050	50.0
52.0	950	1 050	1 100		650	750	800	850	52.0
54.0	700	800	850		500	550	600		54.0
56.0	500	600	650						56.0

This material is supplied for reference use only. Operator must refer to in-cab Crane Rating Manual and Operator's Manual to determine allowable crane lifting capacities and assembly and operating procedures.

Main Boom + 16.8m Offset Fly Capacity Chart - 360° Rotation - Fully Extended Tracks
ABCD+A [37 194kg Counterweight]
 [All capacities are listed in kg]

Load Radius (m)	Boom Length (m)								Load Radius (m)
	55				59.6				
	0°	15°	30°	45°	0°	15°	30°	45°	
16.0	4 850				1 950				16.0
18.0	4 850				1 950				18.0
20.0	4 850				1 950	2 000			20.0
22.0	4 850	4 950			1 950	2 000			22.0
24.0	4 850	4 950			1 950	2 000	2 250		24.0
26.0	4 850	4 950	4 350		1 950	2 000	2 250		26.0
28.0	4 850	4 950	4 250	3 800	1 950	2 000	2 250	2 650	28.0
30.0	4 850	4 800	4 150	3 750	1 950	2 000	2 250	2 650	30.0
32.0	4 850	4 700	4 100	3 700	1 950	2 000	2 250	2 650	32.0
34.0	4 400	4 600	4 000	3 650	1 950	2 000	2 250	2 650	34.0
36.0	3 900	4 300	3 950	3 600	1 950	2 000	2 250	2 650	36.0
38.0	3 400	3 800	3 850	3 550	1 950	2 000	2 250	2 500	38.0
40.0	3 000	3 350	3 650	3 550	1 950	2 000	2 250	2 300	40.0
42.0	2 600	2 950	3 200	3 400	1 750	1 950	2 050	2 100	42.0
44.0	2 250	2 550	2 800	3 000	1 550	1 750	1 850	1 900	44.0
46.0	1 950	2 250	2 450	2 600	1 300	1 550	1 650	1 750	46.0
48.0	1 700	1 950	2 150	2 250	1 150	1 300	1 500	1 550	48.0
50.0	1 400	1 650	1 850	1 950	950	1 150	1 250	1 350	50.0
52.0	1 200	1 400	1 550	1 650	750	950	1 100	1 150	52.0
54.0	950	1 150	1 300	1 350	600	750	900	950	54.0
56.0	750	950	1 050	1 100		600	700	750	56.0
58.0	600	750	850				550	600	58.0
60.0		550	600						60.0

This material is supplied for reference use only. Operator must refer to in-cab Crane Rating Manual and Operator's Manual to determine allowable crane lifting capacities and assembly and operating procedures.

Fly Attachment Load Charts – Metric CE

Main Boom + 3.1m Offset Fly Lift Capacity Chart - 360° Rotation - Fully Extended Tracks ABCD+A [37 194kg Counterweight] [All capacities are listed in kg]													
Load Radius (m)	Boom Length (m)												Load Radius (m)
	12.9				25–26.2				37.4–38.3				
	0°	15°	30°	45°	0°	15°	30°	45°	0°	15°	30°	45°	
3.0	32 450	32 450	32 450	28 450	32 400								3.0
3.5	32 450	32 450	32 100	28 100	32 400								3.5
4.0	32 450	32 450	31 150	27 600	32 400								4.0
4.5	32 450	32 450	30 300	27 150	32 400	32 400							4.5
5.0	32 450	32 450	29 500	26 750	32 400	32 400							5.0
6.0	32 450	32 450	28 450	25 950	32 400	32 400	31 650	27 850					6.0
7.0	32 450	31 100	27 850	25 200	32 400	32 400	30 700	27 350					7.0
8.0	32 450	29 550	26 800	24 550	32 400	32 400	29 850	26 900	22 100	22 200			8.0
9.0	32 450	28 450	25 950	24 100	32 400	32 400	29 050	26 450	20 950	20 600	20 350	20 100	9.0
10.0	31 400	28 050	25 300	23 850	32 400	32 400	28 450	25 900	19 450	19 200	19 000	18 900	10.0
12.0	23 900	25 100	24 750		26 300	26 600	26 850	25 050	17 100	16 950	16 750	16 650	12.0
14.0					20 900	21 150	21 350	21 500	15 100	14 950	14 850	14 750	14.0
16.0					17 100	17 250	17 400	17 500	13 450	13 350	13 250	13 200	16.0
18.0					14 650	14 400	14 550	14 650	12 050	11 950	11 900	11 850	18.0
20.0					12 550	12 650	12 750	8 000	10 850	10 800	10 750	10 700	20.0
22.0					10 800	10 850	10 900		9 800	9 800	9 750	9 750	22.0
24.0					9 350	9 400			8 800	8 800	8 750	8 700	24.0
26.0					7 800	6 450			8 100	8 050	8 050	8 050	26.0
28.0									7 150	7 250	7 300	7 350	28.0
30.0									6 300	6 350	6 400		30.0
32.0									5 550	5 600	5 650		32.0
34.0									4 900	4 950	5 000		34.0
36.0									4 350	4 400			36.0
38.0									3 050	3 050			38.0

This material is supplied for reference use only. Operator must refer to in-cab Crane Rating Manual and Operator's Manual to determine allowable crane lifting capacities and assembly and operating procedures.

Main Boom + 3.1m Offset Fly Capacity Chart - 360° Rotation - Fully Extended Tracks
ABCD+A [37 194kg Counterweight]
 [All capacities are listed in kg]

Load Radius (m)	Boom Length (m)								Load Radius (m)
	49.7–50.6				59.6				
	0°	15°	30°	45°	0°	15°	30°	45°	
10.0	12 050	4 850	5 050		3 650				10.0
12.0	12 050	12 350	12 900	5 350	3 650				12.0
14.0	12 050	12 350	12 900	13 200	3 650	3 750	3 900		14.0
16.0	12 050	12 350	12 400	12 350	3 650	3 750	3 900	4 150	16.0
18.0	11 450	11 350	11 250	11 200	3 650	3 750	3 900	4 150	18.0
20.0	10 400	10 300	10 250	10 200	3 650	3 750	3 900	4 150	20.0
22.0	9 450	9 450	9 450	9 400	3 650	3 750	3 900	4 150	22.0
24.0	8 400	8 550	8 650	8 650	3 650	3 750	3 900	4 150	24.0
26.0	7 350	7 450	7 550	7 650	3 650	3 750	3 900	4 150	26.0
28.0	6 350	6 450	6 550	6 600	3 650	3 750	3 900	4 100	28.0
30.0	5 500	5 600	5 700	5 750	3 600	3 650	3 700	3 750	30.0
32.0	4 750	4 850	4 950	5 000	3 250	3 300	3 350	3 350	32.0
34.0	4 100	4 200	4 250	4 300	2 900	2 950	3 000	3 000	34.0
36.0	3 550	3 650	3 700	3 750	2 600	2 650	2 650	2 700	36.0
38.0	3 050	3 100	3 150	3 200	2 300	2 350	2 350	2 400	38.0
40.0	2 600	2 650	2 700		2 000	2 050	2 100	2 100	40.0
42.0	2 200	2 250	2 300		1 750	1 800	1 850	1 850	42.0
44.0	1 850	1 900	1 900		1 550	1 550	1 600	1 600	44.0
46.0	1 500	1 550	1 600		1 250	1 300	1 300	1 350	46.0
48.0	1 250	1 250			950	1 000	1 000		48.0
50.0	950	1 000			650	700	750		50.0

This material is supplied for reference use only. Operator must refer to in-cab Crane Rating Manual and Operator's Manual to determine allowable crane lifting capacities and assembly and operating procedures.

Main Boom + 9.5m Offset Fly Capacity Chart - 360° Rotation - Fully Extended Tracks
ABCD+A [37 194kg Counterweight]
 [All capacities are listed in kg]

Load Radius (m)	Boom Length (m)								Load Radius (m)
	55				59.6				
	0°	15°	30°	45°	0°	15°	30°	45°	
12.0	6 500				2 700				12.0
14.0	6 500				2 700				14.0
16.0	6 500	6 550			2 700	2 750			16.0
18.0	6 500	6 550			2 700	2 750	2 950		18.0
20.0	6 500	6 550	6 800		2 700	2 750	2 950	3 300	20.0
22.0	6 500	6 550	6 800	7 200	2 700	2 750	2 950	3 300	22.0
24.0	6 500	6 550	6 800	7 200	2 700	2 750	2 950	3 300	24.0
26.0	6 500	6 550	6 800	7 200	2 700	2 750	2 950	3 300	26.0
28.0	6 150	6 550	6 800	7 100	2 700	2 750	2 950	3 300	28.0
30.0	5 300	5 650	5 950	6 200	2 700	2 750	2 950	3 300	30.0
32.0	4 600	4 900	5 150	5 350	2 700	2 750	2 950	3 200	32.0
34.0	3 950	4 250	4 500	4 650	2 700	2 750	2 950	2 950	34.0
36.0	3 350	3 650	3 850	4 000	2 450	2 600	2 700	2 700	36.0
38.0	2 850	3 100	3 300	3 450	2 200	2 350	2 450	2 500	38.0
40.0	2 400	2 650	2 800	2 950	1 900	2 050	2 150	2 250	40.0
42.0	2 000	2 200	2 400	2 450	1 650	1 800	1 900	1 950	42.0
44.0	1 650	1 850	2 000	2 050	1 450	1 550	1 650	1 700	44.0
46.0	1 350	1 500	1 600	1 700	1 200	1 350	1 400	1 450	46.0
48.0	1 050	1 200	1 300	1 350	1 000	1 150	1 200	1 250	48.0
50.0	750	900	1 000		700	850	950	1 050	50.0
52.0	500	600	700			600	700	750	52.0

This material is supplied for reference use only. Operator must refer to in-cab Crane Rating Manual and Operator's Manual to determine allowable crane lifting capacities and assembly and operating procedures.

Main Boom + 16.8m Offset Fly Capacity Chart - 360° Rotation - Fully Extended Tracks
ABCD+A [37 194kg Counterweight]
 [All capacities are listed in kg]

Load Radius (m)	Boom Length (m)								Load Radius (m)
	55				59.6				
	0°	15°	30°	45°	0°	15°	30°	45°	
16.0	4 850				1 950				16.0
18.0	4 850				1 950				18.0
20.0	4 850				1 950	2 000			20.0
22.0	4 850	4 950			1 950	2 000			22.0
24.0	4 850	4 950			1 950	2 000	2 250		24.0
26.0	4 850	4 950	4 350		1 950	2 000	2 250		26.0
28.0	4 850	4 950	4 250	3 800	1 950	2 000	2 250	2 650	28.0
30.0	4 850	4 800	4 150	3 750	1 950	2 000	2 250	2 650	30.0
32.0	4 850	4 700	4 100	3 700	1 950	2 000	2 250	2 650	32.0
34.0	4 250	4 600	4 000	3 650	1 950	2 000	2 250	2 650	34.0
36.0	3 700	4 200	3 950	3 600	1 950	2 000	2 250	2 650	36.0
38.0	3 200	3 650	3 850	3 550	1 950	2 000	2 250	2 500	38.0
40.0	2 750	3 150	3 500	3 550	1 950	2 000	2 250	2 300	40.0
42.0	2 300	2 700	3 000	3 250	1 750	1 950	2 050	2 100	42.0
44.0	1 950	2 300	2 600	2 800	1 550	1 750	1 850	1 900	44.0
46.0	1 650	1 950	2 200	2 400	1 300	1 550	1 650	1 750	46.0
48.0	1 350	1 600	1 850	2 000	1 150	1 300	1 500	1 550	48.0
50.0	1 050	1 300	1 550	1 650	950	1 150	1 250	1 350	50.0
52.0	800	1 050	1 250	1 350	700	950	1 100	1 150	52.0
54.0	550	800	950	1 050	500	750	900	950	54.0
56.0		550	700	750		500	650	750	56.0
58.0							500		58.0

This material is supplied for reference use only. Operator must refer to in-cab Crane Rating Manual and Operator's Manual to determine allowable crane lifting capacities and assembly and operating procedures.