
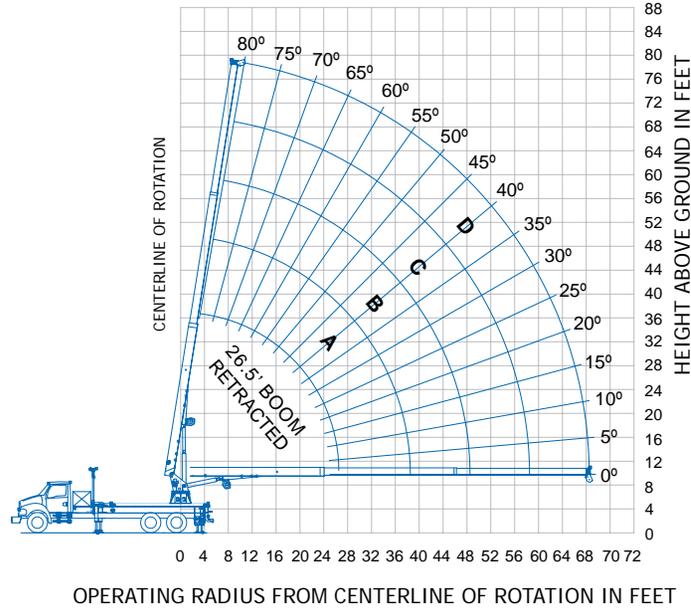


DEDUCTIONS

Overhaul Weight	See Manufacturer Nameplate
Snatch Block	See Manufacturer Nameplate
2-Manbasket SLR Platform	700 lb

WEIGHTS

1 Part Line	2 Part Line	3 Part Line	4 Part Line	WARNING
				<p>Anti-two-block system, if supplied, must be in good operating condition before operating crane.</p> <p>Refer to the owner's manual.</p> <p>Keep at least three wraps of load line on the drum at all times.</p>
5,840 lb	11,680 lb	17,520 lb	23,360 lb	
6,000 lb	12,000 lb	18,000 lb	24,000 lb	<p>1/2" ROT RESISTANT (5:1 SF) 29,200 lb. min Breaking Strength</p> <p>1/2" 6x25 IWRC (3.5:1 SF) 23,000 lb. min Breaking Strength</p>

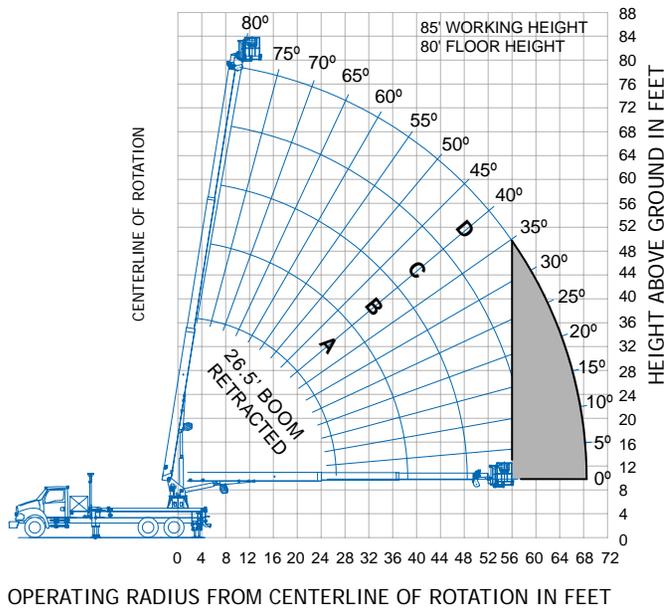

LOAD CHART FOR CRANE APPLICATIONS ONLY									
MAIN BOOM LOAD RATINGS IN LBS. WITH OUTRIGGERS FULLY EXTENDED									
Operating Radius Feet	Boom Length	A		B		C		D	
	26.5 Feet	40 Feet	50 Feet	60 Feet	70 Feet	80 Feet	90 Feet	100 Feet	110 Feet
Feet	lb.	lb.	lb.	lb.	lb.	lb.	lb.	lb.	lb.
5	78° 24,000								
8	71° 17,030	78° 15,840							
10	67° 14,380	75° 13,230	78° 12,740						
12	62° 12,480	72° 11,370	76° 10,900	79° 10,570					
14	57° 11,040	69° 9,990	73° 9,520	77° 9,200	79° 8,960				
16	51° 9,880	66° 8,910	71° 8,460	75° 8,140	78° 7,900				
18	45° 8,910	63° 8,040	69° 7,600	73° 7,290	76° 7,060				
20	38° 8,040	59° 7,320	66° 6,900	71° 6,600	74° 6,370				
24	18° 6,180	52° 6,180	61° 5,810	67° 5,530	71° 5,310				
28		44° 5,300	55° 5,000	62° 4,730	67° 4,520				
32		35° 4,540	49° 4,350	58° 4,120	64° 3,920				
36		22° 3,730	43° 3,800	53° 3,620	60° 3,440				
40			35° 3,320	48° 3,200	56° 3,040				
44			26° 2,820	43° 2,830	52° 2,700				
48			10° 2,060	36° 2,490	47° 2,400				
52				29° 2,150	42° 2,140				
56				19° 1,730	37° 1,890				
60								31° 1,640	
64								23° 1,360	
68								9° 900	

The Gray Area represents a "no work" zone, do not place the basket in this area.

Meets ANSI B30.5 Requirements - Do not operate crane or accessories within 10' (3,05 m) of live power lines.
 NOTICE: This chart is for reference only and must not be used for lifting purposes. Consult factory for other boom options.