

**Max Capacity**  
 Capacité maxi  
 Max Tragfähigkeit / Max capacidad **24,200 lbs**

**Max Tip Height on Main Boom**  
 Hauteur de levage maximum  
 Maximale Hubhöhe / Altura máxima de elevación **33' 4"**

**Total Weight**  
 Poids total  
 Gesamtgewicht / Peso total **25,000 lbs**

**Dimensions**  
 Dimensions  
 Abmessungen / Dimensiones **13' 8"x4' 11"x6' 5"**



**V120R**

**FRONT**  
 N° 2 355/65 - 15"  
 Avant  
 Vorderrad  
 Delantera

**REAR**  
 N° 2 250 - 15"  
 Arrière  
 Hinterrad  
 Trasera

**3,200 PSI – 21.5 hp AC HYDRAULIC SYSTEM (Max Pressure / Motor HP)**  
 Hydraulique (Pression maxi/Puissance moteur)  
 Hydraulik ( Max Druck/Motorleistung)  
 Hidraulica (Presion max/Potencia motor)

**180° REAR WHEEL STEERING**  
 Direction arriere  
 Hintere Lenkung  
 Direccion trasera


**ELECTRO-HYDRAULIC BRAKES**  
 Brakes Freins electro-hydrauliques  
 Elektro-Hydraulische Bremse  
 Frenos electrohidraulicos

**FRONT WHEEL DRIVE 2x8.7 hp AC**  
 Traction avant  
 Frontantrieb  
 Tracción delantera


**80V 640 Ah ONBOARD BATTERY CHARGER EASY BATTERY FILL**  
 Chargeur embarqué et recharge automatique de liquide  
 Bordladergerät und automatische Nachfüllung  
 Cargador a bordo y recarga automática de líquido

**REMOVABLE COUNTERWEIGHT 2 x 4,620 lbs**  
 Contrepoids amovibles  
 Abnehmbare Gegengewichte  
 Contrapesos extraíbles


**STANDARD**

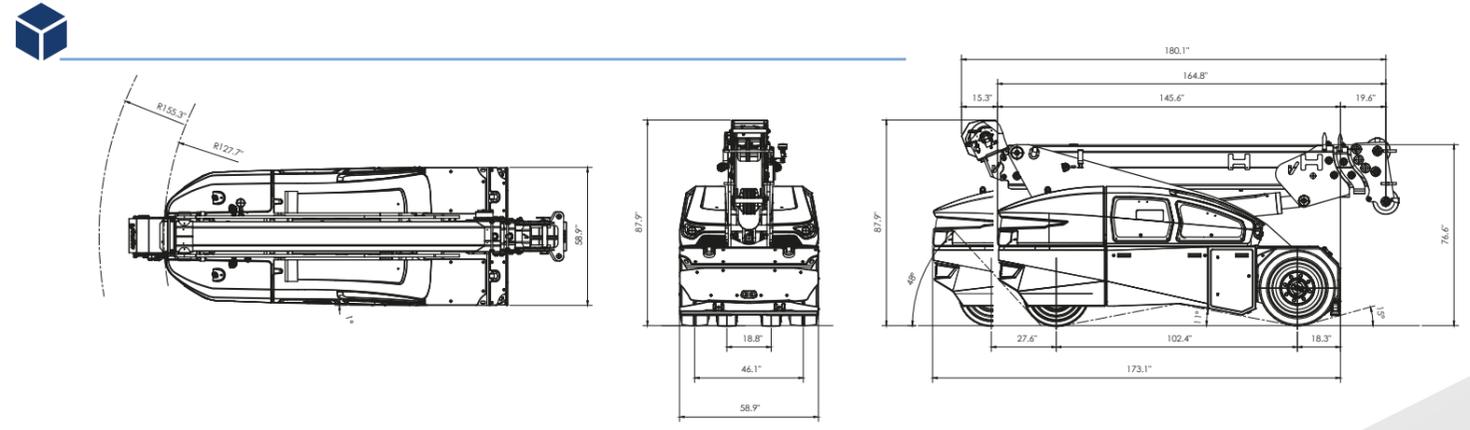


cod. 188.160 Rev A

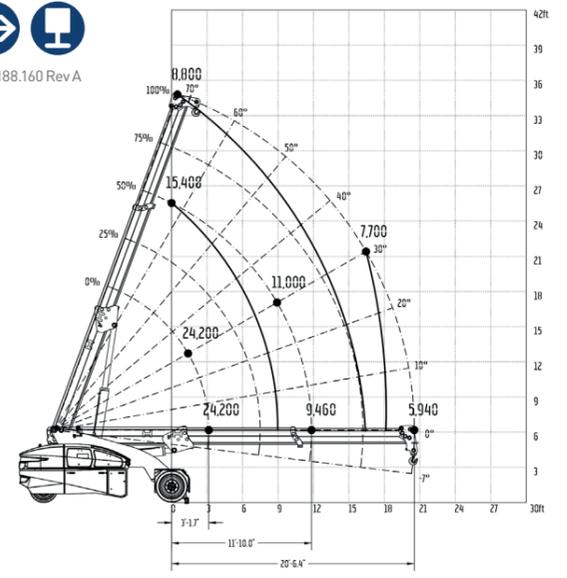


cod. 188.158 Rev A

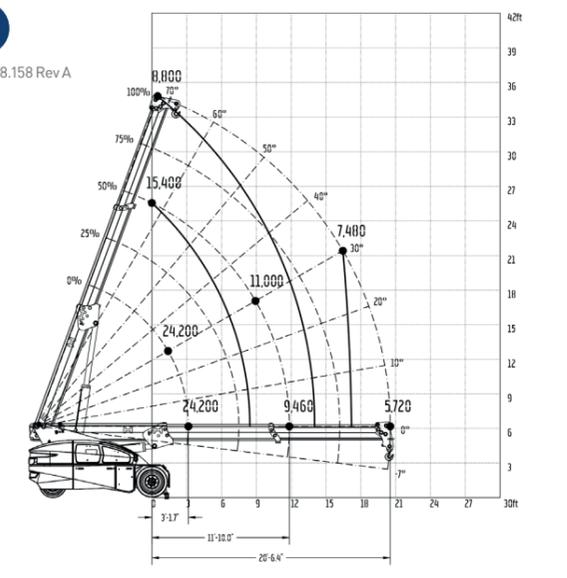

cod. 18E

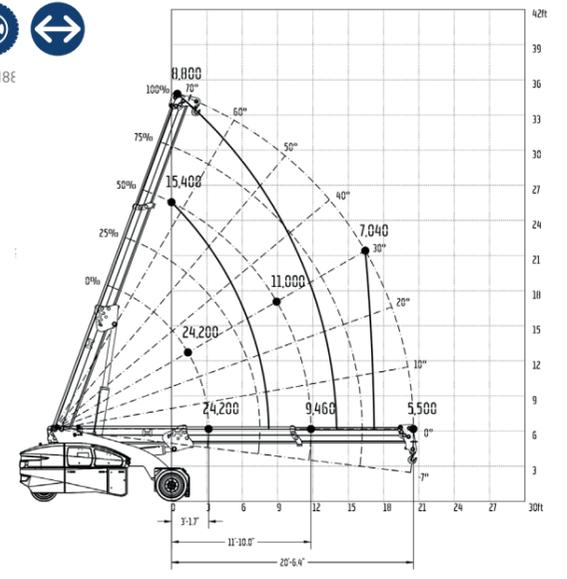


cod. 188.157 Rev A

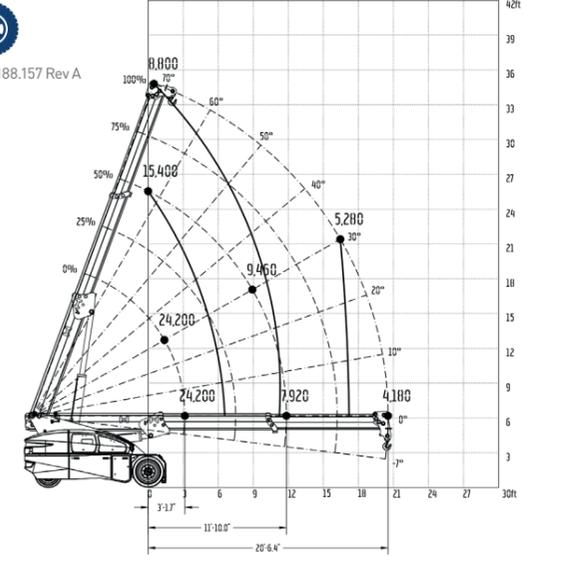

- CAPACITY ON;**
- Wheels
  - Extended Wheelbase
  - Front Stabilizer Deployed

**Jib Chart**

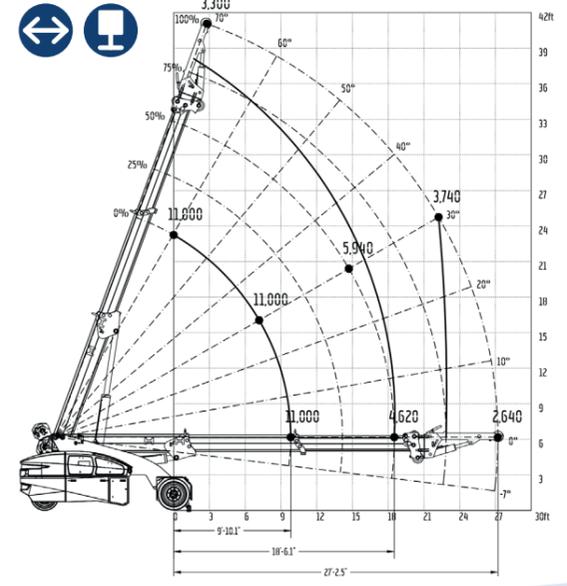

**Reference Standards**  
 2006/42 CE  
 EN 13000