


Outline dimensions




Carbody front/rear beam (no trunnions)

Length	11,60 m	38' 1"
Width	2,80 m	9' 2"
Height	2,60 m	8' 6"
Weight	37 700 kg	83,000 lb



Carbody side beam with struts

Length	9,10 m	29' 10"
Width	2,90 m	9' 6"
Height	2,90 m	9' 6"
Weight	34 800 kg	76,800 lb




Carbody center beam

Length	8,00 m	26' 3"
Width	2,40 m	7' 11"
Height	2,10 m	6' 11"
Weight	10 100 kg	22,300 lb



Trunnion

Length	3,30 m	10' 10"
Width	1,00 m	3' 3"
Height	1,00 m	3' 3"
Weight	5 700 kg	12,500 lb




Crawlers

Length	8,70 m	28' 5"
Width	2,30 m	6' 8"
Height*	2,30 m	6' 8"
Weight**	53 000 kg	116,800 lb

*Height with track tensioner at maximum travel 2,26 m (7' 5")


**Weight without track pad: 30 250 kg (66,700 lb)

Outline dimensions

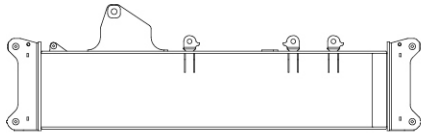

Rotating bed center


Length	9,80 m	32' 2"
Width	3,50 m	11' 6"
Height	3,10 m	9' 10"
Weight	37100 kg	81,700 lb



Front roller carrier and hook roller assembly

Length	10,0 m	32' 10"
Width	3,20 m	10' 6"
Height	3,40 m	11' 2"
Weight*	49 000 kg	108,100 lb


*Weight without swing drive assembly



Rear roller carrier and hook roller assembly

Length	9,30 m	30' 6"
Width	3,10 m	10' 2"
Height	3,50 m	11' 6"
Weight*	38 800 kg	85,600 lb

*Weight without swing drive assembly




Swing drive assembly

Length	3,00 m	9' 10"
Width	1,30 m	4' 3"
Height	2,00 m	6' 7"
Weight	2 300 kg	5,100 lb



Power plant support

Length	4,60 m	15' 1"
Width	1,90 m	6' 3"
Height	0,50 m	1' 8"
Weight	1 800 kg	3,970 lb

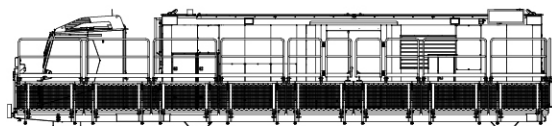


Power plant and cab assembly

Length	15,10 m	49' 7"
Width	3,50 m	11' 6"
Height	3,10 m	10' 2"
Weight	36 700 kg	80,800 lb


Option

Outline dimensions




Whip hoist drum

Length	5,20 m	17' 1"
Width	2,80 m	9' 2"
Height	3,10 m	10' 2"
Weight	31 000 kg	68,000 lb




Main hoist drum #2

Length	5,40 m	17' 9"
Width	2,90 m	9' 6"
Height	3,20 m	10' 6"
Weight	38 100 kg	84,000 lb




Boom hoist drum with sheave bank and equalizer

Length	4,50 m	14' 9"
Width	3,30 m	10' 10"
Height	2,90 m	9' 6"
Weight	37 600 kg	83,000 lb



Main hoist drum #1


Length	5,90 m	19' 4"
Width	2,80 m	9' 2"
Height	3,40 m	11' 2"
Weight	41 280 kg	91,000 lb



Counterweight positioning actuator


Length	10,40 m	34' 1"
Width	2,60 m	8' 6"
Height	2,60 m	8' 6"
Weight	25 000 kg	55,400 lb

Outline dimensions

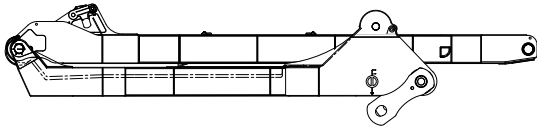


Counterweight positioning frame

Length	14,60 m	47' 11"
Width	3,52 m	11' 6"
Height	3,00 m	9' 10"
Weight	38 000 kg	83,800 lb




Counterweight tray center

Length	5,30 m	17' 5"
Width	3,50 m	11' 6"
Height	2,50 m	8' 2"
Weight	30 000 kg	66,200 lb




Counterweight tray side

Length	7,10 m	23' 4"
Width	3,00 m	9' 10"
Height	2,20 m	7' 3"
Weight	26 580 kg	58,600 lb



Counterweight pad


Length	3,40 m	11' 2"
Width	1,50 m	4' 11"
Height	2,50 m	8' 2"
Weight	9 700 kg	21,450 lb



7,0 m No. 92 mast butt


Length	7,60 m	24' 11"
Width	3,10 m	10' 2"
Height	3,20 m	10' 6"
Weight	11 400 kg	25,200 lb

Outline dimensions




8,5 m No. 92 mast insert with raising frame

Length	10,60 m	34' 9"
Width	3,30 m	10' 10"
Height	3,00 m	9' 10"
Weight	16 600 kg	36,600 lb




12,0 m No. 92 mast insert

Length	12,30 m	40' 4"
Width	3,10 m	10' 2"
Height	2,70 m	8' 10"
Weight	9 800 kg	21,500 lb

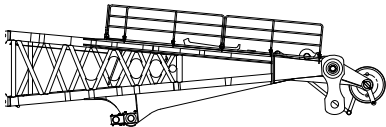


11,0 m No. 92 mast top

Length	13,00 m	42' 8"
Width	3,50 m	11' 6"
Height	3,60 m	11' 10"
Weight	27 500 kg	60,600 lb



12,5 m No. 93 backhitch butt

Length	14,60 m	47' 11"
Width	1,40 m	4' 7"
Height	3,0 m	9' 10"
Weight	12 100 kg	26,720 lb




3,2 m No. 93 backhitch transition insert

Length	6,70 m	22' 0"
Width	3,50 m	11' 6"
Height	2,70 m	8' 10"
Weight	8 400 kg	18,500 lb


 Option

Outline dimensions

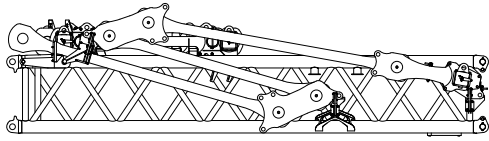


11,4 m No. 93 backhitch insert

Length	11,70 m	38' 5"
Width	3,50 m	11' 6"
Height	3,20 m	10' 6"
Weight	20 400 kg	45,000 lb



5,9 m No. 93 backhitch top


Length	6,40 m	20' 12"
Width	3,20 m	10' 6"
Height	2,00 m	6' 7"
Weight	5 400 kg	11,900 lb



7,0 m No. 90 boom butt


Length	7,70 m	25' 3"
Width	4,00 m	13' 1"
Height	3,20 m	10' 6"
Weight*	27 600 kg	60,720 lb

**Weight with boom stands and boom stop assemblies*

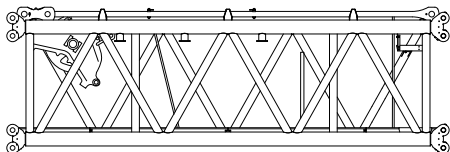

10,0 m No. 90 boom insert with wire rope guide

Length	10,30 m	33' 9"
Width	4,00 m	13' 1"
Height	3,2 m	10' 6"
Weight	25 000 kg	55,020 lb

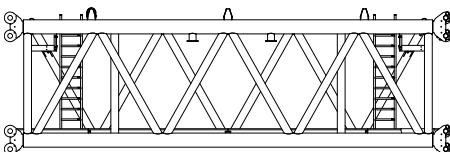


10,0 m No. 90 boom insert without straps

Length	10,30 m	33' 9"
Width	4,00 m	13' 1"
Height	3,20 m	10' 6"
Weight*	23 600 kg	52,000 lb

**Weight without wire rope guide*


Outline dimensions

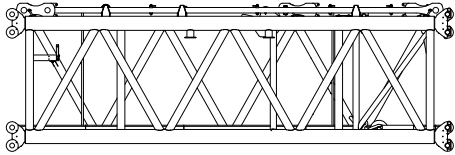

10,0 m No. 90 boom insert with equalizer platform


Length	10,30 m	33' 9"
Width	4,00 m	13' 1"
Height	3,20 m	10' 6"
Weight*	30 800 kg	67,900 lb

*Weight without wire rope guide

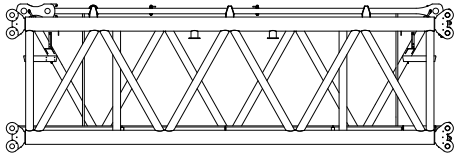


10,0 m No. 90 boom insert with straps

Length	10,30 m	33' 9"
Width	4,00 m	13' 1"
Height	3,2 m	10' 6"
Weight	26 100 kg	57,500 lb




5,0 m No. 90 boom insert with straps

Length	5,30 m	17' 5"
Width	4,00 m	13' 1"
Height	3,20 m	10' 6"
Weight	15 900 kg	35,040 lb

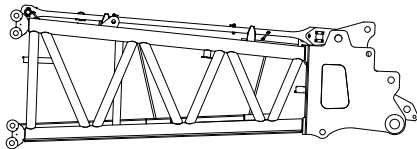

8,0 m No. 90 boom top

Length	9,80 m	32' 2"
Width	4,00 m	13' 1"
Height	3,20 m	10' 6"
Weight	37 600 kg	82,800 lb




Lower boom point assembly

Length	2,70 m	8' 10"
Width	2,00 m	6' 7"
Height	2,10 m	6' 11"
Weight	11 300 kg	25,000 lb


Option

Outline dimensions




Counterweight fabricated

Length	3,50 m	11' 6"
Width	2,50 m	8' 2"
Height	0,60 m	2' 0"
Weight	20 000 kg	44,000 lb




Counterweight cast

Length	2,40 m	7' 10"
Width	1,90 m	6' 3"
Height	0,46 m	1' 6"
Weight	10 000 kg	22,000 lb

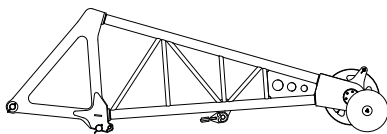


Upper boom point assembly

Length	9,10 m	29' 10"
Width	2,30 m	7' 7"
Height	3,00 m	9' 10"
Weight	7 700 kg	16,970 lb




Boom raising dolly

Length	2,90 m	9' 6"
Width	2,50 m	8' 3"
Height	1,70 m	5' 7"
Weight	9 200 kg	20,200 lb




Luffing jib raising beam


Length	4,00 m	13' 1"
Width	1,30 m	4' 3"
Height	1,30 m	4' 3"
Weight	2 500 kg	5,500 lb

 Option


Outline dimensions




Block assembly, 2 000 t		
Length	5,90 m	19' 4"
Width	3,50 m	11' 6"
Height	2,50 m	8' 2"
Weight	39 600 kg	87,400 lb



Hook assembly, 2 000 t		
Length	5,40 m	17' 9"
Width	1,70 m	5' 7"
Height	1,90 m	6' 3"
Weight	15 300 kg	33,800 lb



Hook block, 200 t		
Length	3,20 m	10' 6"
Width	1,60 m	5' 3"
Height	1,40 m	4' 7"
Weight	12 700 kg	28,000 lb



Weight ball, 50 t		
Length	2,75 m	9' 0"
Width	0,80 m	2' 7"
Height	0,80 m	2' 7"
Weight	5 000 kg	11,000 lb