


PK 22002 €H


HIGH PERFORMANCE

Power Link Plus as standard.


A

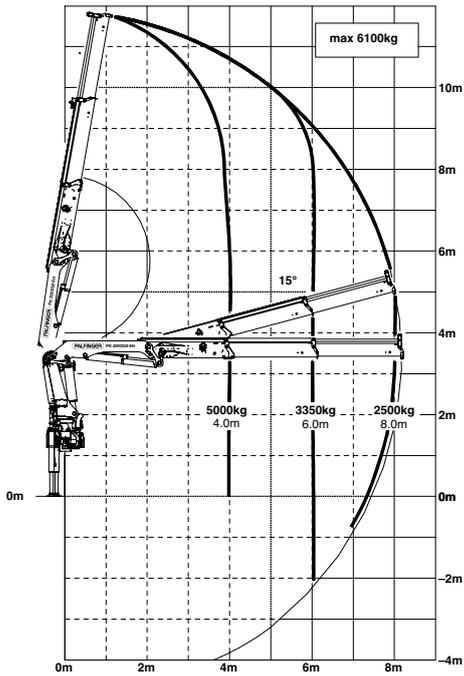


B

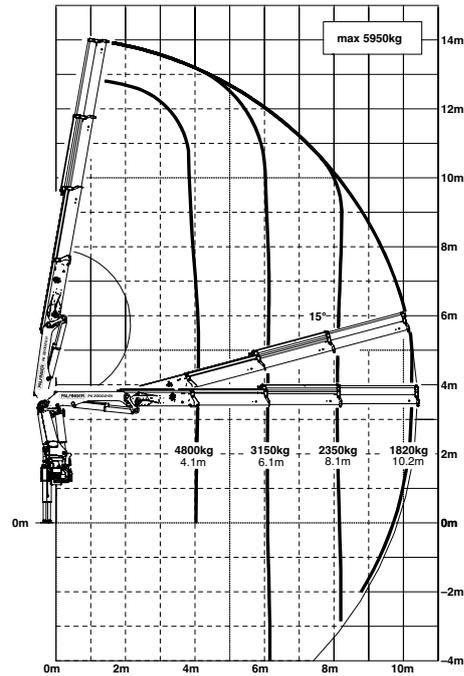

D

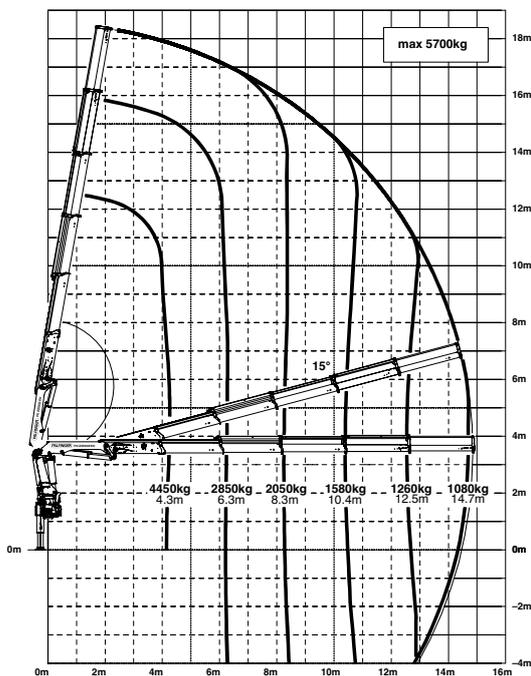


E

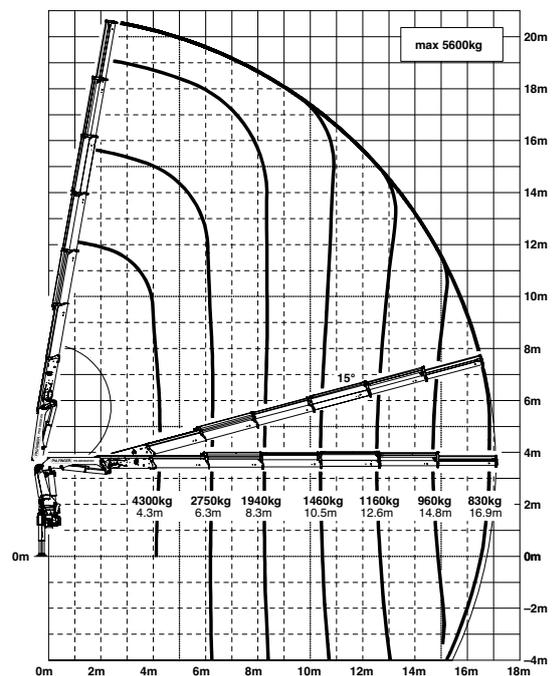

The outreaches stated are with a boom angle of 20° and are therefore not the maximum.

Lifting capacities

C

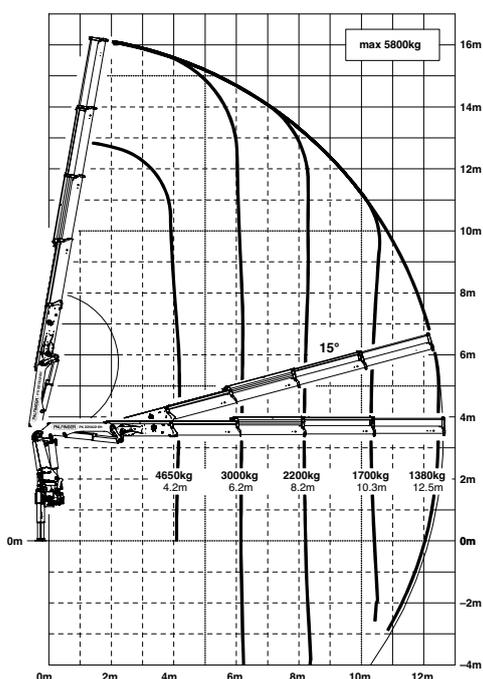


max.		6100 kg	13440 lbs	A
4.0 m	13' 1"	5000 kg	11100 lbs	
6.0 m	19' 8"	3350 kg	7400 lbs	
8.0 m	26' 3"	2500 kg	5500 lbs	

max.		5950 kg	13100 lbs	B
4.1 m	13' 5"	4800 kg	10600 lbs	
6.1 m	20' 0"	3150 kg	7000 lbs	
8.1 m	26' 7"	2350 kg	5100 lbs	
10.2 m	33' 6"	1820 kg	4050 lbs	
12.5 m*	41' 0"	1440 kg	3150 lbs	
14.7 m*	48' 3"	1160 kg	2550 lbs	

max.		5800 kg	12780 lbs	C
4.2 m	13' 9"	4650 kg	10200 lbs	
6.2 m	20' 4"	3000 kg	6600 lbs	
8.2 m	26' 11"	2200 kg	4850 lbs	
10.3 m	33' 10"	1700 kg	3750 lbs	
12.5 m	41' 0"	1380 kg	3050 lbs	
14.7 m*	48' 3"	1120 kg	2500 lbs	
16.8 m*	55' 1"	940 kg	2050 lbs	

max.		5700 kg	12560 lbs	D
4.3 m	14' 1"	4450 kg	9800 lbs	
6.3 m	20' 8"	2850 kg	6300 lbs	
8.3 m	27' 3"	2050 kg	4550 lbs	
10.4 m	34' 1"	1580 kg	3450 lbs	
12.5 m	41' 0"	1260 kg	2800 lbs	
14.7 m	48' 3"	1080 kg	2350 lbs	
16.9 m*	55' 5"	890 kg	1960 lbs	
18.9 m*	62' 0"	620 kg	1380 lbs	

C PJ060B JV2

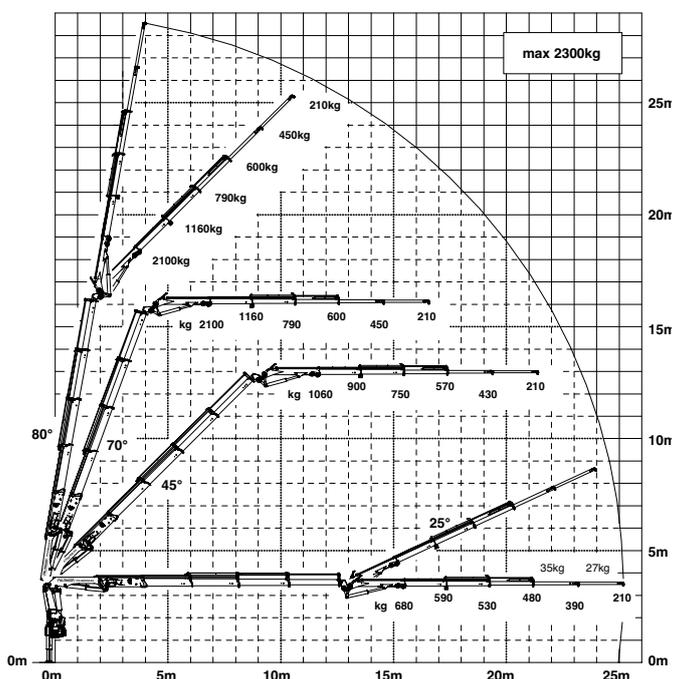

max.		5600 kg	12340 lbs	E
4.3 m	14' 1"	4300 kg	9500 lbs	
6.3 m	20' 8"	2750 kg	6000 lbs	
8.3 m	27' 3"	1940 kg	4300 lbs	
10.5 m	34' 5"	1460 kg	3200 lbs	
12.6 m	41' 4"	1160 kg	2550 lbs	
14.8 m	48' 7"	960 kg	2100 lbs	
16.9 m	55' 5"	830 kg	1820 lbs	
18.9 m*	62' 0"	620 kg	1380 lbs	

*mechanical extension